

Impact Dot Matrix Printer

For Windows 8 Users
Software Guide

English

Copyright and Trademark

EPSON and ESC/P are registered trademarks of Seiko Epson Corporation in Japan and other countries/regions. Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.

General Notice: Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Epson disclaims any and all rights in those marks.

The contents of this manual are subject to change without notice.

Printer Software

Operating System Versions

In this manual, the following abbreviations are used.

Windows® refers to Microsoft® Windows 8.

❑ Windows 8 refers to Windows 8, Windows 8 Pro, and Windows 8 Enterprise.

About Your Printer Software

The Epson software includes the printer driver software and EPSON Status Monitor 3.

The printer driver is software that allows your computer to control the printer. You need to install the printer driver so your Windows software applications can take full advantage of the printer's capabilities.

EPSON Status Monitor 3 program allows you to monitor the status of your printer, alerts you when errors occur, and provides you with troubleshooting tips. Install EPSON Status Monitor 3 after installing the printer driver. See "Setting Up Your Printer on a Network" on page 16 for instructions.

Installing the Printer Driver

Note:

The Windows Update driver and drivers included with the operating system may already be installed. Remove these drivers first, and then install the driver that you downloaded from the web site.

Name of the printer driver included with the operating system:

- EPSON ESC/P 9Pin V4 Class Driver
- EPSON ESC/P V4 Class Driver

Follow the steps below to install the printer driver.

1. Make sure that the printer is off and that Windows is running on your computer.


Note:

You must access Windows as the Administrator.

2. Extract the file that you downloaded from the web site, and open the folder.
3. Double-click the **SETUP.exe** icon (Windows 8 x86 Edition) or **SETUP64.exe** icon (Windows 8 x64 Edition). Then follow the on-screen instructions.
4. When the software license agreement screen appears, read the statement, then click **Accept**.

Note:

*If the following screen appears, click **Install this driver software anyway**.*

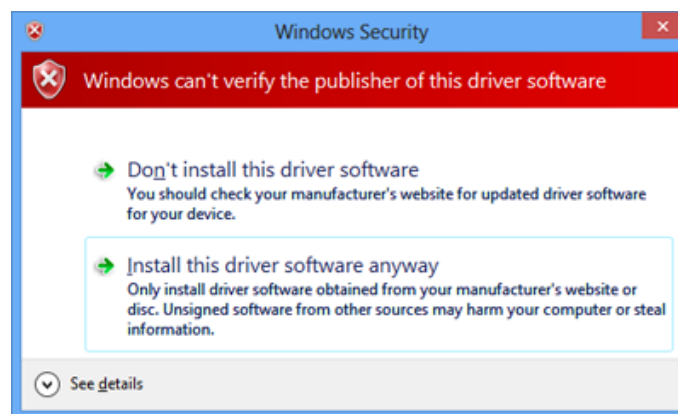

5. When the installation is complete, click **OK**.

Using the Printer Driver

You can access the printer driver from your Windows applications or from the Start screen.

- ☐ When you access the printer driver from a Windows application, any settings you make apply only to the application you are using. See “Accessing the printer driver from Windows applications” on page 5 for more information.
- ☐ When you access the printer driver from the Start screen, the printer driver settings you make apply to all your applications. See “Accessing the printer driver from the Start screen” on page 6 for more information.

See “Changing the printer driver settings” on page 8 to check and change printer driver settings.


Note:

While many Windows applications override the settings made with the printer driver, some do not, so you must verify that the printer driver settings match your requirements.


Accessing the printer driver from Windows applications

Follow these steps to access the printer driver from a Windows application:


1. Select **Print Setup** or **Print** from the File menu of your application software. In the Print or Print Setup dialog box displayed, make sure that your printer is selected.

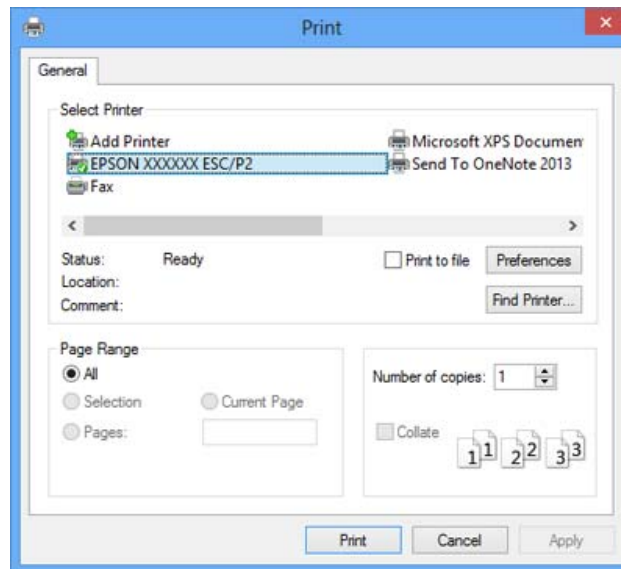

2. Click **Preferences** or **Printer Properties**. (The button you click depends on your application and you may need to click a combination of these buttons.) The Document Properties window appears, and you see the Layout, Paper/Quality, User Defined Paper and Extension Settings menus. These menus contain the printer driver settings.

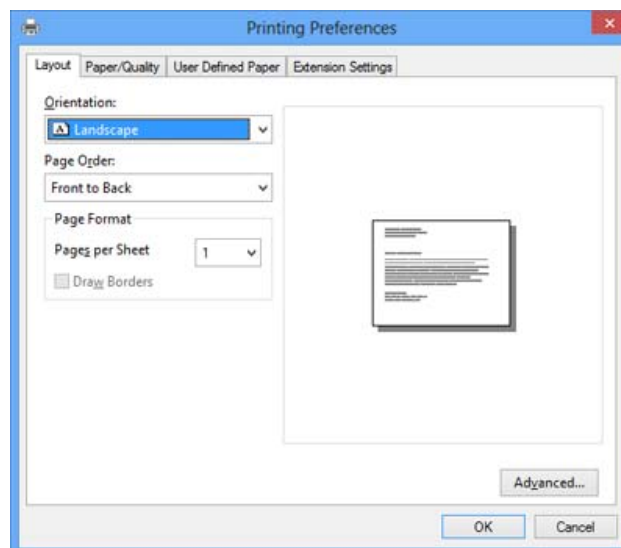


3. To view a menu, click the corresponding tab at the top of the window. See “Changing the printer driver settings” on page 8 to change the settings.

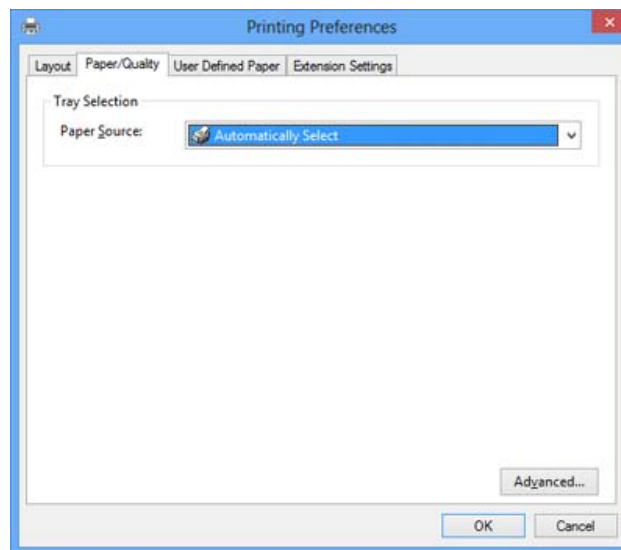

Accessing the printer driver from the Start screen

Follow these steps to access the printer driver from the Start screen:


1. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**. Next, click **View devices and printers** from the **Hardware and Sound** category.
2. Right-click your printer icon, and click **Printing Preferences**. The screen displays the Document Properties window, which contains the Layout, Paper/Quality, User Defined Paper and Extension Settings menus. These menus display the printer driver settings.

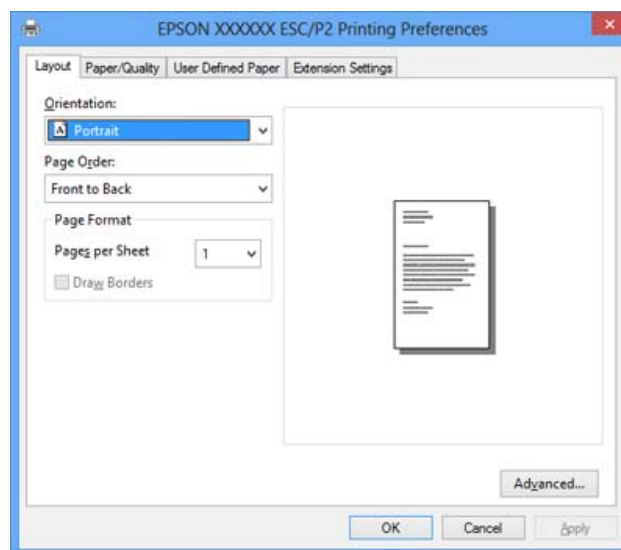

When you click **Printer properties** in the menu displayed by right-clicking the printer icon, the Properties window appears, which includes menus used to make the printer driver settings.

Note:

Do not click **Properties** though both **Properties** and **Printer properties** are displayed in the menu.

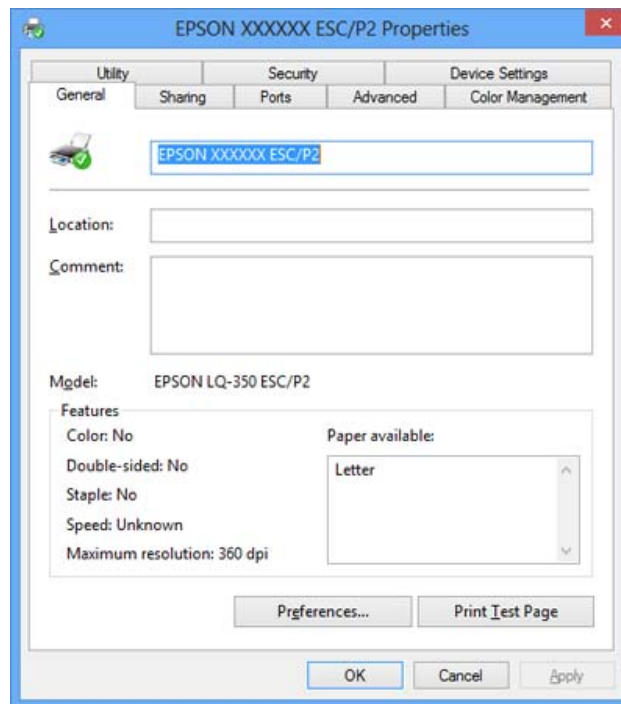


3. To view a menu, click the corresponding tab at the top of the window. See "Printer Driver Settings Overview" on page 8 for information on how to change the settings.

Changing the printer driver settings

Your printer driver has four menus from which you can change the printer driver settings; Layout, Paper/Quality, User Defined Paper, and Extension Settings. You can also change settings on the Utility menu in the printer software. For an overview of the available settings, see “Printer Driver Settings Overview” on page 8.

Click the **Help** button on the Printer Driver screen.

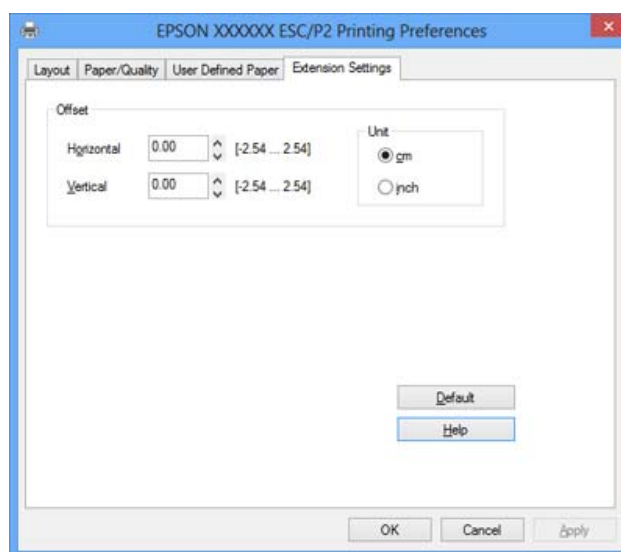

When you finish making your printer driver settings, click **OK** to apply the settings, or click **Cancel** to cancel your changes.

Once you have checked your printer driver settings and changed them if necessary, you are ready to print.

Printer Driver Settings Overview

The following tables show the Windows printer driver settings. Note that not every setting is available in all versions of Windows. For more details, see **Help** for the printer driver.

Printer settings

Note:

Depends on the type of printer, some functions may not be displayed.

Settings	Explanations
Paper Size	Select the size of the paper you want to use. If you do not see your paper size, use the scroll bar to scroll through the list. If your paper size is not included in the list, see "Definition of Custom Paper Size" on page 10 for instructions.
Orientation	Select Portrait or Landscape.
Paper Source	Select the paper source you want to use.
Graphic - Print Quality	Select the printing resolution you want. The higher the resolution you select, the more detailed your printout will be; however, increasing the resolution slows printing.
Halftoning	Select the type of halftoning to use when printing graphics. To let the printer determine the best halftone quality, use Auto Select .
Printer Font Setting	<p>Select a character table group to use. You can select one of three character table groups, Standard, Expanded, and None (Bit Image printing).</p> <p>When Standard or Expanded is selected, the printer uses the device fonts. Expanded includes more fonts than Standard.</p> <p>When None is selected, the printer uses bit map images instead of the device fonts.</p> <p>For details on the fonts which are included in each table, see your printer's documentation.</p>
Page Order*	Select whether to print from front to back or back to front.
Pages Per Sheet*	Select the number of pages that you want to print onto a single page.
Copy Count*	When you select more than one in the Number of copies box, this check box appears and you can select whether to collate the pages of the copies.
Advanced Printing Features*	Select Enable or Disable for the metafile Spooling.
Print Optimizations*	Select Disable when the printer does not use the device fonts and select Enable when the printer uses the device fonts.
Printable Area	<p>If Standard is selected, the normal printable area for Epson impact printers is used.</p> <p>If Maximum is selected, the printer's maximum printable area is used.</p>
Top Margin Priority	Select which setting for the print-start position is to be used; driver setting or printer setting. For more details, see Help for the printer driver.
Packet Mode	Ordinarily, there is no need to change this setting. If you change the printer's Packet Mode settings, change this setting to match. If the printer and printer driver settings are different, you may not be able to print correctly. For more details, see Help for the printer driver.
User Defined Paper	If your paper is not included in the Paper Size drop-down list, you can add the size to the list. For more details, see Help for the printer driver.

Settings	Explanations
Offset	This setting allows you to offset the image on the page. That is, you can adjust the position of the printed image. If the offset you specify moves a portion of the image out of the printer's printable area, that portion will not be printed.

* For details, see Windows help.

Definition of Custom Paper Size

If your paper is not included in the Paper Size drop-down list, you can add the size to the list.

1. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**. Next, click **View devices and printers** from the **Hardware and Sound** category.
2. Right click your printer icon, and click **Printing Preferences**.
3. Select the **User Defined Paper** menu.
4. Enter the paper size in the Paper Size fields.
5. Click **Apply** and then click **OK**.

Note:

For more details, see *Help for the printer driver*.

Monitoring settings

Settings	Explanations
EPSON Status Monitor 3	You can access EPSON Status Monitor 3 when you click this button. To monitor the printer, make sure the Monitor the printing status check box is selected.
Monitoring Preferences	Click this button to open the Monitoring Preferences dialog box where you can make settings for EPSON Status Monitor 3. See "Setting up EPSON Status Monitor 3" on page 12 for more information.

Setting Utility

Note:

Depending on the product, this may not be available.

Settings	Explanations
Bi-D Adjustment	Click this button to open the Bi-D Adjustment dialog box where you can adjust misalignment in vertical lines.
Printer Setting	Click this button to open the Printer Settings utility dialog box where you can change the printer settings.

Using EPSON Status Monitor 3

EPSON Status Monitor 3 allows you to monitor your printer's status, alerts you when printer errors occur, and provides troubleshooting instructions when needed.

EPSON Status Monitor 3 is available when:

- ☐ The printer is connected directly to the host computer via the parallel port [LPT1] or the USB port.
- ☐ Your system is configured to support bidirectional communication.

EPSON Status Monitor 3 is installed when the printer is connected directly and you install the printer driver as described in the *Start Here* or the *Setup Guide*. When sharing the printer, be sure to set EPSON Status Monitor 3 so that the shared printer can be monitored on the printer server and clients. See "Setting up EPSON Status Monitor 3" on page 12 and "Setting Up Your Printer on a Network" on page 16.



Caution:

Although you can print to the printer directly connected to the computer in a remote location by using Remote Desktop function of Windows 8, communication error may occur.*

** Remote Desktop function: Function which enables a user to access applications or files in a computer connected to the office network from a mobile computer at a remote location.*


Note:

- ☐ *If you are using a computer running Windows 8 with multiple users are logged on, a communication error message may be displayed when monitoring printers at the same time.*
- ☐ *If EPSON Status Monitor 3 is installed with the Windows Firewall feature turned on (recommended), the shared printer may not be able to be monitored. This problem can be resolved by adding EEBAgent.exe to Exceptions of the firewall function.*

Setting up EPSON Status Monitor 3

Follow these steps to set up EPSON Status Monitor 3:

1. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**. Next, click **View devices and printers** from the **Hardware and Sound** category.
2. Right-click your printer icon, click **Printer properties**, and then click the **Utility** tab.
3. Click the **Monitoring Preferences** button. The Monitoring Preferences dialog box appears.

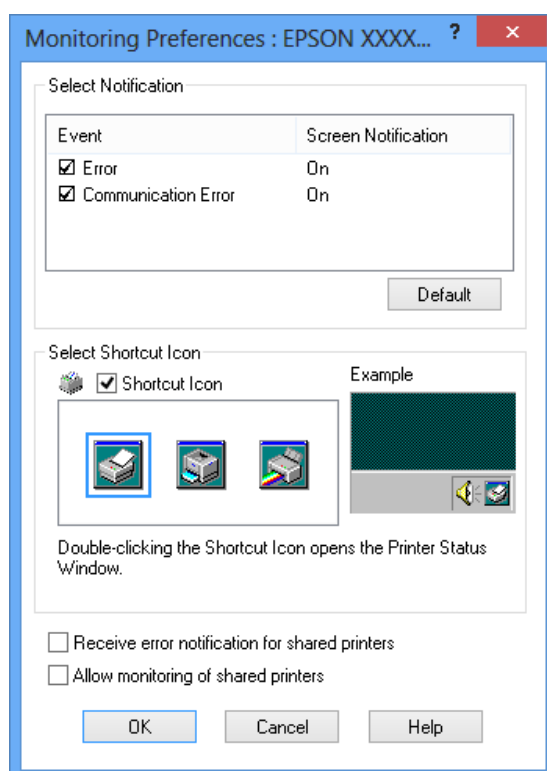

4. The following settings are available:

Select Notification	Displays the error item check box On/Off status. Turn on this check box to display the selected error notification.
Select Shortcut Icon	The selected icon is displayed on the taskbar. The setting's example is shown on the right window. By clicking the shortcut icon, you can access the Monitoring Preferences dialog box easily.
Receive error notification for shared printers	Error notification for a shared printer can be received when this check box is selected.

<p>Allow monitoring of shared printer</p>	<p>When this check box is selected, a shared printer can be monitored by other PCs.</p> <p>Note: You must access Windows as the Administrator.</p>
--	---

Note:


Click the **Default** button to revert all items to the default settings.

Accessing EPSON Status Monitor 3

Do one of the following to access EPSON Status Monitor 3;

- ☐ Double-click the printer-shaped shortcut icon on the taskbar. To add a shortcut icon to the taskbar, go to the Utility menu and follow the instructions.
- ☐ Open the Utility menu, then click the **EPSON Status Monitor 3** icon. To find out how to open the Utility menu, See “Using the Printer Driver” on page 4.

When you access EPSON Status Monitor 3 as described above, the following printer status window appears.

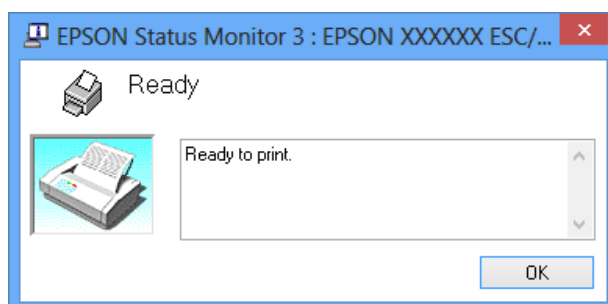

You can view printer status information in this window.

Note:

*It might not be possible to retrieve the printer status during printing. In this situation, click the **EPSON Status Monitor3** button in the Utility tab, and use the printer with the status window left open.*

Installing EPSON Status Monitor 3

Follow the steps below to install EPSON Status Monitor 3 that you downloaded from the EPSON web site.

1. Make sure that the printer is off and that Windows is running on your computer.
2. Extract the file that you downloaded from the web site, and open the folder.
3. Double-click the **STMSETUP.exe** icon. Then follow the on-screen instructions.
4. When the software license agreement screen appears, read the statement, then click **Accept**.
5. When the installation is complete, click **OK**.

Using Bi-D Adjustment

Note:

Depending on the product, this may not be available.

This utility tool allows you to make adjustment when you find a misalignment in vertical line.

Making adjustment with Bi-D Adjustment


To make Bi-D Adjustment, follow the steps below.



Caution:

- ☐ *Do not turn off the printer while the printer is printing adjustment pattern. Doing so may cause the printer to store incorrect settings. If you turned off the printer during the adjustment process, restart Bi-D Adjustment again.*
 - ☐ *Do not turn off Packet Mode setting.*
 - ☐ *Network connection is not supported.*
 - ☐ *Make sure that the printer's status is ready before making Bi-D Adjustment.*
 - ☐ *If Bi-D Adjustment is not printed properly, set the printer's font setting to default and try again.*
1. Open the **Utility** menu, then click the **Bi-D Adjustment** icon. To find out how to open the **Utility** menu, see "Using the Printer Driver" on page 4. The Bi-D Adjustment window appears.

2. Click **Next**.
3. Click **Print**. The printer prints three sets of adjustment pattern.
4. Look at the adjustment patterns and find the vertical line that is aligned the best. Then, select the corresponding line number in the Bi-D Adjustment window.
5. Click **Set**. The adjustment pattern will be stored in the printer.

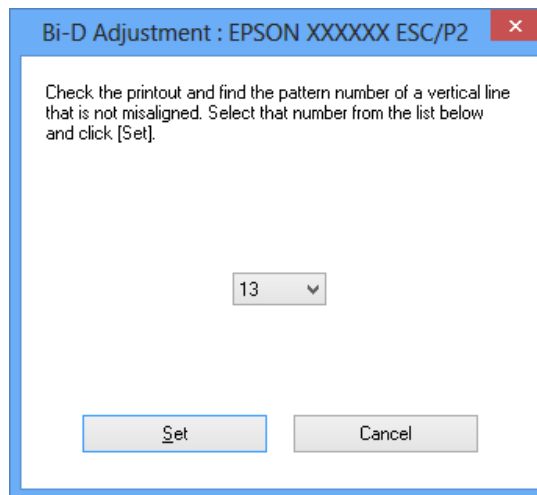

Using Printer Setting

Note:

Depending on the product, this may not be available.

This utility tool allows you to display current settings stored in the printer, change settings of the printer, and read settings stored in the file or save settings to the file.




Caution:

- ☐ Do not turn off Packet Mode setting.
- ☐ Network connection is not supported.
- ☐ Make sure that the printer's status is ready before getting setting from the printer or updating the printer settings.

Changing printer settings

To change printer settings, follow the steps below.

1. Open the **Utility** menu, then click the **Printer Setting** icon. To find out how to open the Utility menu, see “Using the Printer Driver” on page 4. The Printer Setting windows appears.

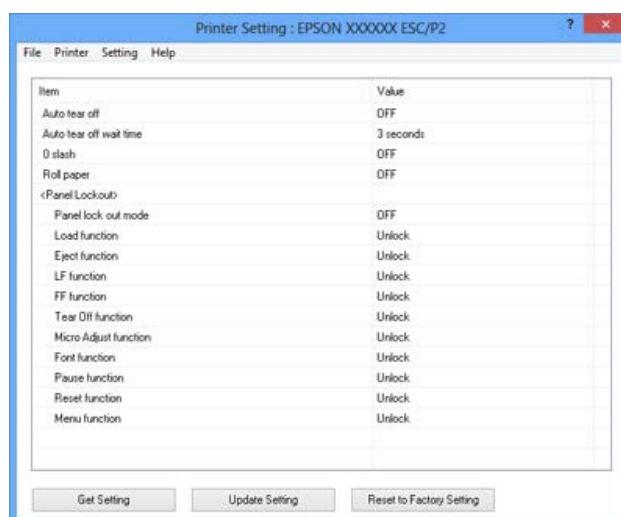

2. Change the necessary printer settings. For details on how to use this tool, refer to the printer driver Help.

Setting Up Your Printer on a Network

Sharing the printer

This section describes how to share the printer on a standard Windows network.

The computers on a network can share a printer that is directly connected to one of them. The computer that is directly connected to the printer is the printer server, and the other computers are the clients which need permission to share the printer with the printer server. The clients share the printer via the printer server.

According to the versions of Windows OS and your access rights on the network, perform the appropriate settings of the printer server and clients.

See “Setting up your printer as a shared printer” on page 17.

See “Setting for the clients” on page 18.

Note:

- ❑ *To setup a shared printer, the printer driver needs to be installed on all server and client computers that will use the printer.*
- ❑ *When sharing the printer, be sure to set EPSON Status Monitor 3 so that the shared printer can be monitored on the printer server and clients. See “Setting up EPSON Status Monitor 3” on page 12.*
- ❑ *When connecting to a Windows XP shared printer, error and warning notifications do not appear during printing. Installing Windows XP Service Pack 1 or later will solve this problem.*
- ❑ *When connecting to a shared printer beyond a router, error and warning notification for shared printers during printing is not available in some cases because of the router’s settings.*
- ❑ *The printer server and clients should be set on the same network system, and they should be under the same network management beforehand.*

Setting up your printer as a shared printer


Follow these steps to set the printer server.

Note:

You must access as the Administrators of the local machine.

1. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**. Next, click **View devices and printers** from the **Hardware and Sound** category.
2. Right-click your printer icon, click **Printer Properties**, and then click the **Sharing** tab in the appearing screen.

3. Select **Share this printer**, then type the name in the Share name box and click **OK**.

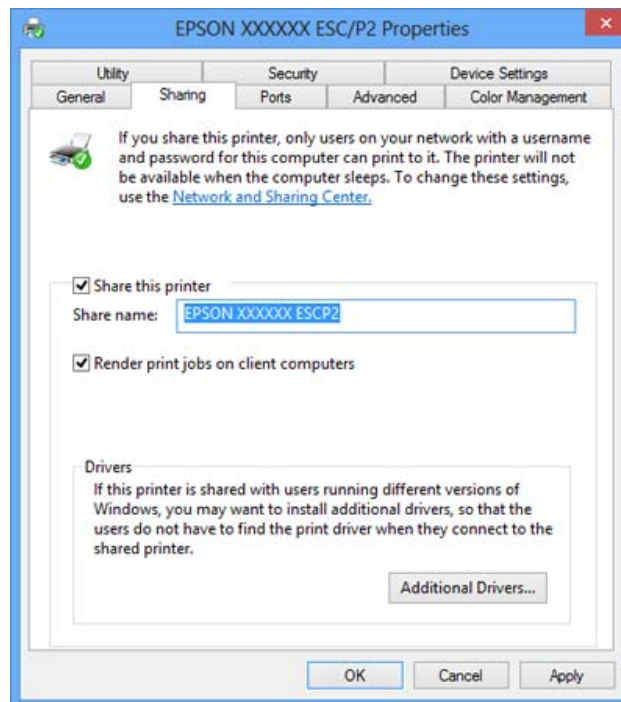

Note:

- ❑ Do not use spaces or hyphens for the share name, or an error may occur.
- ❑ You cannot select **share this printer** until you click the **Change sharing options** button.

You need to set the client computers so that they can use the printer on a network. See the following pages for details:

See "Setting for the clients" on page 18.

Setting for the clients


This section describes how to install the printer driver by accessing the shared printer on a network.

Note:


- ❑ To share the printer on a Windows network, you need to set the printer server. For details, see "Setting up your printer as a shared printer" on page 17.
- ❑ This section describes how to access the shared printer on a standard network system using the server (Microsoft workgroup). If you cannot access the shared printer due to the network system, ask the administrator of the network for assistance.
- ❑ When you want to use the EPSON Status Monitor 3 at clients, you have to install both of the printer driver and the EPSON Status Monitor 3 that you downloaded from the EPSON web site.

❑ If the printer drivers are not already installed on the client, please install them before performing these settings.


1. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**. Next, click **View devices and printers** from the **Hardware and Sound** category.
2. Right-click the icon for the printer you wish to change the settings for, and then click **Printer properties**.

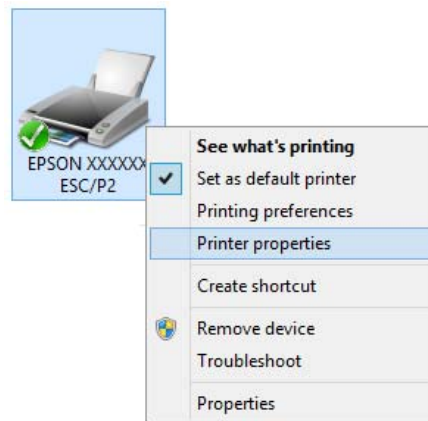

3. Click the **Ports** tab and then click **Add Port**.

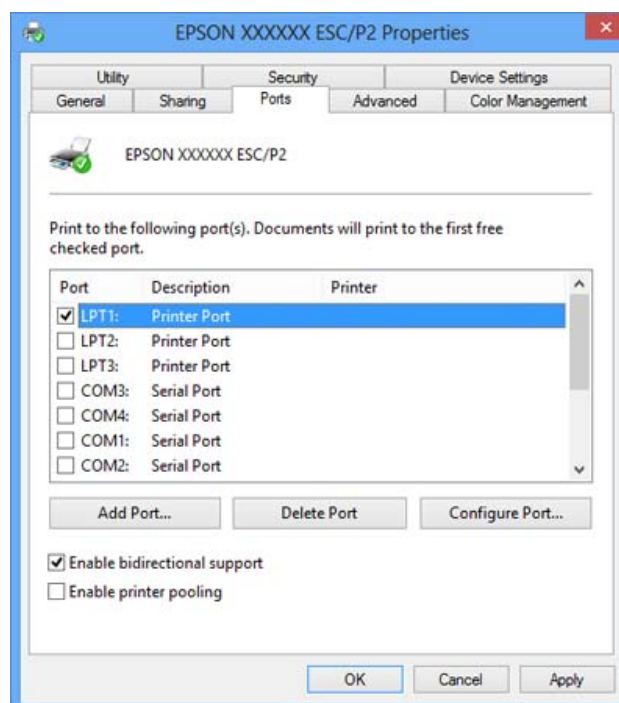


4. When the **Printer Ports** window appears, select **Local Port**, and then click **New Port**.

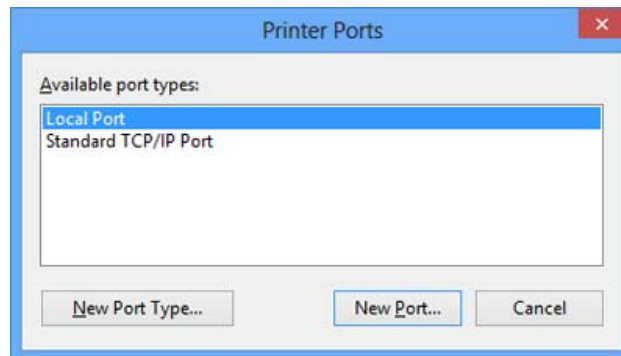

5. Enter the following information for the port name and then click **OK**.

\\Name of computer connected to the target printer\name of shared printer

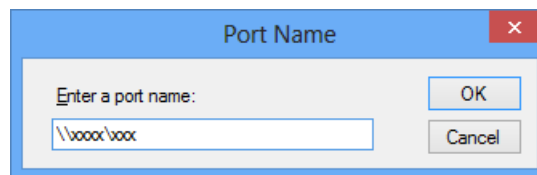

6. After returning to the **Printer Ports** window, click **Close**.
7. Check that the name you entered for the port has been added and selected, and then click **Close**.

Canceling Printing


If the printouts are not what you expected and display incorrect or garbled characters or images, you may need to cancel printing. When the printer icon is displayed on the taskbar, follow the instructions below to cancel printing.

1. Double-click the printer icon on the task bar.



2. When canceling all printing documents, select **Cancel All Documents** on the Printer menu.

When canceling a specified document, select a document you want to cancel and select **Cancel** on the Document menu.

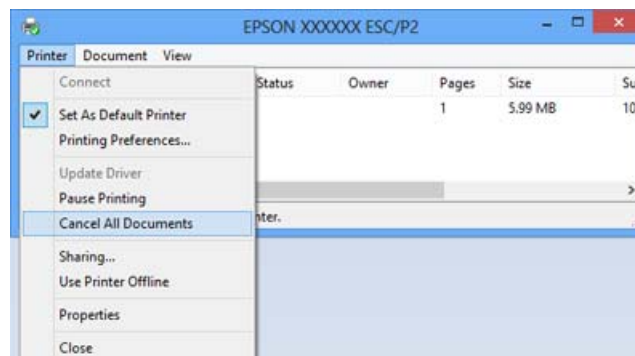


The printing job is canceled.

Uninstalling the Printer Software


When you wish to reinstall or upgrade the printer driver, uninstall the printer driver that has been installed already.

Uninstalling the printer driver and EPSON Status Monitor 3


1. Quit all applications.
2. Click **Desktop** on the Start screen, move the cursor to the top-right corner of the screen, click **Settings**, and then click **Control Panel**.
3. Click **Uninstall a program**.



4. Click **Change or Remove Programs**, select the **EPSON XXXXXX ESC/P2 Printer Utility Uninstall**, then click **Uninstall/Change**.

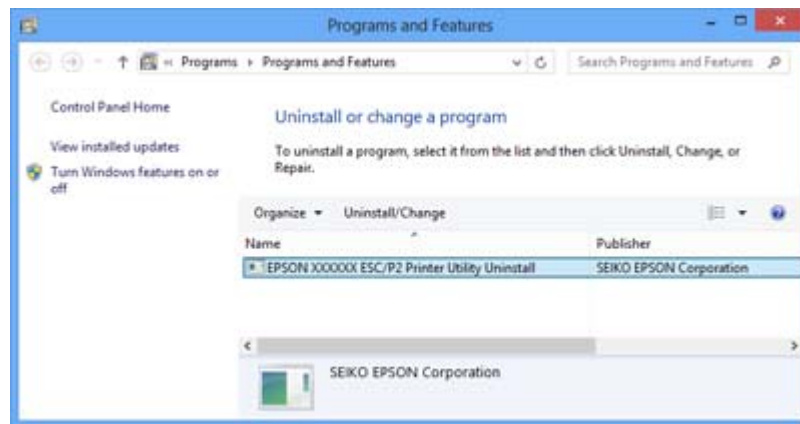

5. Click the **Printer Model** tab, select the icon of the printer you want to uninstall, then click **OK**.

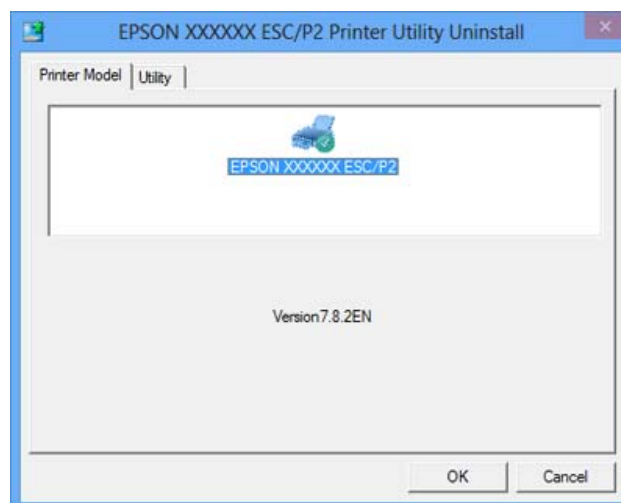

Note:

Make sure that nothing is selected in the **Printer Model** tab. Open **Utility** tab and select **EPSON Status Monitor 3(for EPSON XXXXXX ESC/P2)** and click **OK**. You can uninstall only the EPSON Status Monitor 3.

6. Follow the on-screen instructions.