
**ULTRA-SHORT THROW** LASER PROJECTOR **EB-700U** 





Epson EB-700U is your most impressionable Full HD ultra-short throw laser projector for the retail environment. Coupled with outstanding flexibility and portability, projections look phenomenal even in tight spaces. Every component is skilfully innovated with attention to detail in mind, including the integrated 3LCD technology that will provide you with stunning colour brightness for quality images.

×мнl

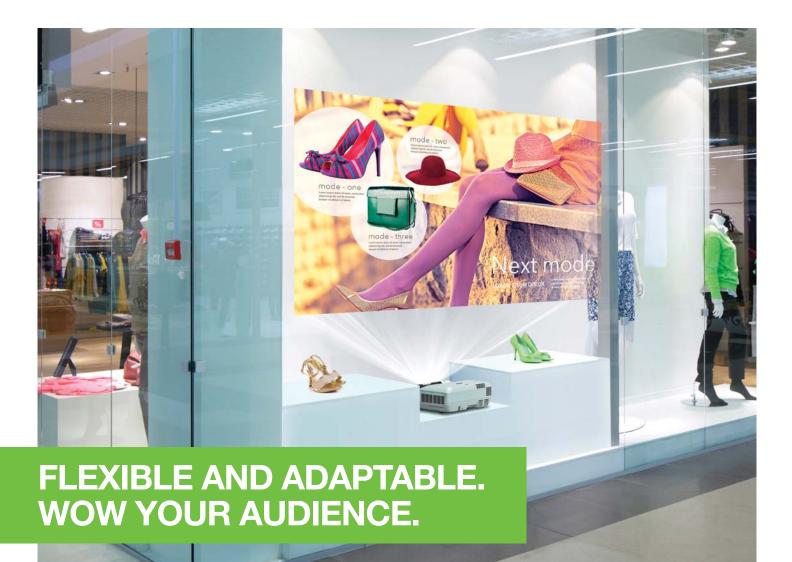







### IT'S IN THE DETAILS.

3LCD technology that delivers quality projected images and reliable performance.

### **Truly Unmatched Performance**

Enjoy peace of mind with guaranteed 20,000 hours of maintenance-free projections with laser light source.

### LASER 3LCD



#### **Amazing Flexibility**

HOMI

Designed especially for tight spaces, it can be rotated 360° in any direction without compromising on image brightness.

### **Spectacular Projections**

WUXGA resolution (1,920 x 1,200 pixels) that gives you sharpness and clarity down to the smallest detail.

\*Throw distance of 47cm is between the lens and wall.



# **Truly Unmatched Performance**

Achieving Greatness in Every Way.

### **Revolutionary Laser Light Source**

Blue light from the laser is projected through a beam splitter, which divides the light into two beams. One beam is reflected by a phosphor wheel, changing it into yellow, while the other beam remains blue. The two beams are then recombined into white light and separated into red, green and blue through dichroic mirrors. Each of the three colours passes through LCD panels, producing three individual images, which are transmitted through a prism and combined into the final full-colour image.



### Inorganic LCD Panels and Phosphor Wheel for Outstanding Reliability

Made of inorganic material, Epson's newly developed phosphor wheel offers superior light and heat resistance to deliver excellent reliability. By combining this with our inorganic LCD panels, we create laser projectors that project bright, vibrant images for extremely long periods.

Organic vs. Inorganic

	Inorganic (Glass, iron, aluminum, etc.)	<b>Organic</b> (Paper, wood, plastic, etc.)	
	YES		
Areat-resistance	YES	NO 🐧	

Unlike organic substances, inorganic substances do not contain carbon.

### **Worry-free Projection**

With multiple laser diodes to rely on, the screen won't go black even if one diode goes out. This eliminates the worry of the projector light burning out while displaying your advertisements.

#### Laser



The projector keeps working even when one light diode goes out.

#### Lamp




The screen goes black when the lamp burns out.

### 20,000 hours of Maintenance-free Use

Engineered with inorganic LCD panels and an inorganic phosphor wheel, this newly designed laser light source delivers 20,000 hours\* of maintenance-free use. In addition, with the advanced electrostatic filter having an equally long-lasting life, you enjoy peace of mind in using these highly reliable laser projectors.

\*Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments.

Maintenance period of laser and lamp

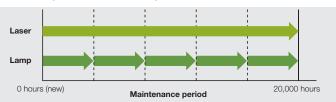

### Well-balanced Whites

White light is created through combining the blue and yellow light beams. The advanced optical engine in the EB-700U series precisely adjusts the blue and yellow light to create brilliant white highlights, bringing a refreshing vibrancy to your images.




Conventional model

EB700U Series

### **Fine-tuning Brightness**

The EB-700U series provides precise brightness adjustment in increments of 1%. This combined with the Constant Brightness mode maintains brightness at a given value to match the venue or subject to deliver astonishing picture quality.

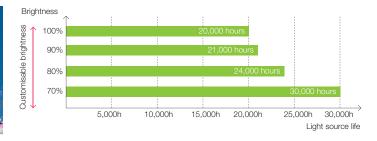

### **Amazing Flexibility** Convenience through Effective Efficiencies.

### **Multi-direction Projection**

The EB-700U can be rotated 360° in any direction — horizontally, vertically and rotationally — without any loss in image brightness. This makes it ideal for a wide range of applications, such as projecting onto ceilings and floors. Furthermore, the newly supported portrait projection allows for more installation flexibilities.



### **Quick Start-up Time**

Equipped with laser light technology, the EB-700U starts up within 5 seconds, ensuring smooth and timely displays. Fast and efficient, your advertisements are always ready for display at a moment's notice.



### **Digital Signage without PC**

Project contents on walls, ceilings and floors without needing to connect to a PC. Simply insert the USB stick that has your content into the projector and it is ready to be projected. Whether it is images or MJPEG videos, the EB-700U makes it easy and convenient.



### **Stunning Large Projections in Small Spaces**

With the ultra-short throw capability, it is now possible to project a largescreen within the narrow space of retail windows. You can now create captivating window displays with the help of large projections to increase the visibility of store merchandise.



### **Spectacular Projections** Incredible Image Quality. A Feast for the Eyes.

### WUXGA – Beyond Full HD Resolution

With WUXGA resolution (1,920 x 1,200 pixels), you enjoy a sharp, clear display of Full HD video (1,920 x 1,080 pixels) images down to the smallest details even on large-screen projections for an incredible and dynamic viewing experience.


### **Colour Adjustment**

With the colour adjustment function, you can easily adjust the hue, saturation and brightness for each component of RGBCMY to match your preferences.

### No Reflection Glare on Projection

Unlike conventional display methods, projections from EB-700U are not subjected to glare from fluorescent lamps and sunlight from windows. The audience will not be distracted by such reflections and all information projected can always be clearly seen.







### **Ease of Maintenance**

### **Epson Projector Management**

With Epson's network monitoring and control software, you can see from a single PC which projectors are available and whether they are running efficiently – even across the biggest network. You can configure your projectors and access their serial numbers remotely, as well as receive instant email alerts for pre-defined critical indicators such as non-functioning devices or overheating laser diode.

Now you can send messages or announcements as JPEG files simultaneously to any number of projectors on a network. This makes the EB-700U projector series very useful for immediate communication needs or even emergencies.




### Web Control

By connecting your projector to a network, you can adjust your projector installation entries from a PC or smart device.

### **Superior Dustproof Design**

A revolutionary high-performance filter and an improved dustproof structure help prevent dust from entering the optical engine. Thanks to this clever dust-proof design, it enables higher brightness that can last longer compared to conventional models. The airflow is also optimised such that the unclean air does not blow directly into the optical engine.

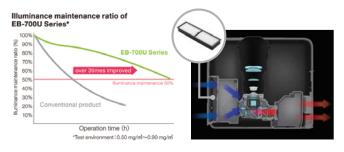

### Scheduling function

The EB-700U Series can run programs as scheduled with a built-in clock. You can set the times for turning projectors on and off daily as necessary.



### EPSON REVOLUTIONISES PROJECTOR MARKET WITH 3LCD TECHNOLOGY AND LEADS AS WORLD'S NO.1\* PROJECTOR BRAND FOR 16 CONSECUTIVE YEARS!

\* Based on independent research by Futuresource Consulting





The device used to change blue laser light into yellow light. The adoption of an inorganic phosphor wheel has made it durable enough to withstand the high output of a laser light source.




The adoption of an inorganic panel enhances light resistance and helps realise an even longer life.

First, blue light from the laser is projected through a beam splitter, which divides the light into two beams: One beam is reflected by a phosphor wheel, where it is changed into yellow, while the other beam remains blue. The two beams are then recombined into white light.

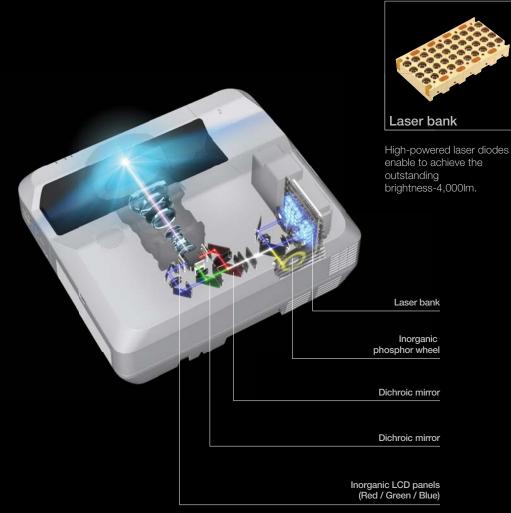







It is separated into red, green and blue through dichroic mirrors. After this, each of the three colours pass through LCD panels, producing three individual images. Lastly, these three images are transmitted through a prism and combined into the final full-colour image.



### SEE VIBRANT, REALISTIC COLOURS WITH HIGH COLOUR BRIGHTNESS.




\*Leading Epson business and education projector vs. leading 1-chip DLP projectors, selected according to NPD data as of July 2015. Based on U.S. research conducted by Radius Research.



### Up to 3X Wider Colour Gamut

Colour gamut refers to the range of colours that can be reproduced by a display device – the wider the gamut, the more realistic it is. Epson 3LCD projectors project three times wider gamut that matches closely to the original standard of a display device (sRGB), as compared to 1-chip projectors.

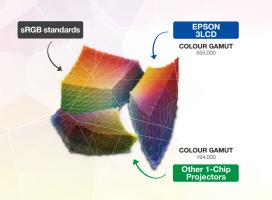

Comparing the yellow corners among the three gamuts, 1-chip projectors have a distinctly darker and smaller set of colours which are not as vibrant as Epson 3LCD projectors.



Compared against similarly-priced leading 1-chip DLP<sup>®</sup> business and education projectors based on NPD data from July 2011 through June 2012 (available) from www.npd.com). Colour brightness (colour light output) measured in accordance with IDMS 15.4. Actual colour brightness will vary depending on actual usage conditions. SLCD™ is a registered trademark of Selko Epson Corporation. DLP™ is a registered trademark of Texas Instruments, Ib.c. and Is use here does not imply any allidion with or endorsement by them.

See colours like never before. Epson 3LCD projectors deliver brilliant colours that match its white brightness to give you balanced, realistic, and vibrant images. It's no wonder Epson projectors are the people's preferred choice.



### **Up to 3X Brighter Colours**

Epson 3LCD projectors deliver up to three times the colour brightness, effortlessly creating the same colour and white brightness, resulting in faithful images with superior colour balance.





### **No Rainbow Effect**

With 1-chip projectors, the spinning motion of the sequential colour wheels tend to cause colours to break out into distinct red, green and blue. Called the rainbow effect, this may cause users to suffer headaches with prolonged viewing. Epson projectors do not give out this effect, giving users a comfortable experience.





www.epson.com.sg/colourbrightness To learn more about 3LCD engines, visit

www.3lcd.com



## **BIGGER PROJECTION. BRIGHTER FUTURE.**

"More than half of the students are unable to read certain contents displayed on a 70" flat panel display."

- Radius Research.




58% of students from US, 61% from UK, and 57% from Singapore are unable to read contents on a 70-inch flat panel display\*. This is why we've built projectors that depict larger and more immersive pictures, so that you can fully engage your audience and maximise every learning experience with exquisite detail and vibrancy. By not downsizing classroom displays to flat panels—you ensure the brightest minds of our future are not hindered by contents displayed too small and unreadable. Experience the real practical difference today.



To find out more, visit www.epson.com.sg/displaysizematters

\*Based on research conducted by Radius Research in US, UK and Singapore. The research was done using a 70-inch class 4k resolution flat panel in a 22' x 27' / 22' x 26' / 22' x 30' classroom-style arrangement respectively. When asked to copy down six short items of information from slides displayed, 58% of students from US, 61% from UK, and 57% from Singapore, aged 12-22, copied at least one item incorrectly.







### SPECIFICATIONS EB-700U



MODEL NUMBER	3	EB-700U	
		RGB liquid crystal shutter projection system	\$
Projection Techno		ROB liquid crystal shutter projection system	F
Specifications of		0.071 (0.10)	(
LCD	Size	0.67" (D10)	F
	Native Resolution	WUXGA	F
Projection Lens			
Туре		No Optical zoom / Focus (Manual)	(
F-Number		1.60	
Focal Length		4.2 mm	A
Zoom Ratio		1.0 - 1.35 (Digital zoom)	\
Throw Ratio		0.27 - 0.37 (Wide - Tele)	
	Type	Laser Diode	
Lightsource Type Life (Normal / Extended)		20.000 / 30.000 hours	(
Creen Size (Proje		20,0007 30,000 Hours	
	ected Distance)		
oom: Wide		70" to 130" [40.5 to 78.1 cm]	
loom: Tele		70" to 130" [55.8 to 106.7 cm]	
standard Size		90" screen [53 to 72.8 cm]	
Brightness			
Vhite Light Output	(Normal / Extended)	4000 lm / 2800 lm	
	t (Normal / Extended)	4000 lm / 2800 lm	
ontrast Ratio		Over 2,500,000:1	(
nternal Speaker(	e)		
	<b>9</b>	16W Mono x 1	
ound Output			
eometric Correc			
leystone	Vertical	-3 to +3 degrees	
	Horizontal	-3 to +3 degrees	
	Auto Keystone	N.A.	
uick Corner		Yes	
onnectivity			
nalog Input	D-Sub 15Pin	1 (Blue)	
nalog input	Composite	RCA x 1 (Yellow)	
igital loout	•		
ligital Input	HDMI	3 (HDMI1 in common with MHL)	
•	ninal D-Sub 15Pin	1 (Black)	
udio Input	Stereo Mini Jack	2	
udio Output	Stereo Mini Jack	1	
Others USB Type A USB Type B	USB Type A	2 (for USB Memory, USB Document Camera, Firmware update, Copy OSD Settings)	
	USB Type B	1 (for USB Display, Mouse, K/B, Control, Firmware Update, Copy OSD Settings)	
Control I/O RS-232C Remote Control Inpu Network Wired LAN		D-sub 9 pin x 1	
		N.A.	
		RJ45 x 1 (100 Mbps)	
	Wireless		
		Yes (ELPAP10 Option)	
Vireless Specific			
supported Speed f	or each Mode	IEEE 802.11b: 11 Mbps	
		IEEE 802.11g: 54 Mbps	
		IEEE 802.11n: 130 Mbps	
upported Mode		Infrastructure, Access Point	
Vireless Lan Securi	ity	Quick Mode: OPEN, WPA2-PSK	
		Advanced Mode: OPEN, WPA/WPA2-PSK, WPA/WPA2-EAP	
		Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast, LEAP	
perating Tempe	rature	Single use: 0 °C to 45 °C* <32 °F to 113 °F>	
peraung tempe			
		(20% - 80% humidity, No condensation)	
		Multi-projection use*: 0 °C to 40 °C** <32 °F to 104 °F>	
		(20 % - 80 % humidity, No condensation )	
perating Altitude	e	0 m to 3000 m (0 ft to 9842 ft)	@
		(over 1500 m / 4,921 ft: with High altitude mode)	F
irect Power On	/ Off	Yes / Yes	E
Start-Up Period		Less than 9 seconds (Epson Logo)	E
		Quick Startup: Approx 5 seconds (HDMI / Computer / Video input)	c
		Warm-up period: 30 seconds	t
a al Davin Davi			ir
ool Down Period	u	Instant Off	§
ir Filter			v
laintenance Cycle	(Normal / Extended)	20,000H / 30,000H	
ower Supply Vol		100 - 240 V AC +/- 10 %, 50 / 60 Hz	
	tion (220 - 240 V)		
aser Diode (Norma		423W / 332W	L
letwork Standby /	0, 0	2.0W / 0.3W	
	ding Feet (D X W X H)	437 x 494 x 172 mm	
Veight		Approx. 24.3 lbs / 11.0 kg	
-	al / Extended / Quiet)	38dB / 37dB / 27dB	

Supplied Accessories

Power Cable: 4.5 m Computer Cable: 1.8 m Remote Control: Yes, with battery attached Foot for main unit: Yes

### Optional Accessories

Setting Plate: ELPMB53 Air Filter: ELPAF43 Wireless LAN unit: ELPAP10



© 2017 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Selko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing Printed December 2017