

## SPECIFICATIONS

Product Name	C6050A	C6050P	C6550A	C6550P
<b>Printing</b>	Serial Inkjet PrecisionCore TFP® with Nozzle Verification Technology			
Print Method	Four-colour printing, individual ink cartridge [UltraChrome™ DL pigment ink: C, M, Y, K (or MK)]			
<b>Ink Cartridge</b>	Black (or Matte Black), Cyan, Magenta, Yellow			
Colour	Black (or Matte Black), Cyan, Magenta, Yellow			
Model	SJC40P-BK / SJC40P-MK / SJC40P-C / SJC40P-M / SJC40P-Y			
<b>Print Resolution</b>	1200 x 1200 dpi (Max.)			
<b>Print Width</b>	Max. 108mm		Max. 211.9mm	
<b>Print Speed</b>	Max speed (300 x 600 dpi): 119mm/s, Speed (600 x 600 dpi): 75mm/s, Normal (600 x 600 dpi): 48mm/s, Quality (600 x 1200 dpi): 18mm/s *When printing 101.6mm width		Max speed (300 x 600 dpi): 85mm/s, Speed (600 x 600 dpi): 49mm/s, Normal (600 x 600 dpi): 34mm/s, Quality (600 x 1200 dpi): 13mm/s *When printing 203.2mm width	
Print Speed *1 (for Matte paper label, Synthetic label)				
Print Speed *2 (for Glossy paper label, Glossy film label, High glossy paper label)	Normal (600 x 600 dpi): 48mm/s, Quality (600 x 1200 dpi): 18mm/s, Max quality (1200 x 1200 dpi): 8mm/s *When printing 101.6mm width		Normal (600 x 600dpi): 34mm/s, Quality (600 x 1200dpi): 13mm/s, Max quality (1200 x 1200dpi): 6mm/s *When printing 203.2mm width	
<b>Interface</b>	USB2.0, Ethernet 1000Base-T / 100Base-TX / 10Base-T			
<b>Extended Interface</b>	Dsub-25 pin			
<b>Option</b>	Paper Holder C6000 (for C6050 Series)		Paper Holder C6500 (for C6550 Series)	
<b>Print Font</b>	Built-in font available			
<b>Barcode Font (Printer Driver Built-In)</b>	UPC-A, UPC-E, JAN13 (EAN), JAN8 (EAN), Code39, ITF, Codabar, Code93, Code128, GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded			
Barcodes	UPC-A, UPC-E, JAN13 (EAN), JAN8 (EAN), Code39, ITF, Codabar, Code93, Code128, GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded			
2-Dimensional Symbols	PDF417, QR Code, Maxi Code, GS1 DataBar Stacked, GS1 DataBar Stacked Omnidirectional, GS1 DataBar, Expanded Stacked, DataMatrix, Aztec Code, MicroPDF417, Micro QR Code			
<b>Media Source</b>	Roll media, Fanfold media			
<b>Media Type</b>	Matte paper label, Synthetic label, Glossy paper label, Glossy film label, High glossy paper label			
<b>Media Form</b>	Continuous Label (BM or w/o BM), Die-cut Label (Gap or BM)			
Roll Media	Continuous Label (BM or w/o BM), Die-cut Label (Gap or BM)			
Fanfold Media	Die-cut Label (BM)			
<b>Media Specifications</b>				
Backing Paper Width	25.4mm - 112mm	50.8mm - 112mm	25.4mm - 215.9mm	50.8mm - 215.9mm
Label Width	21.4mm - 108mm	46.8mm - 108mm	21.4mm - 211.9mm	50.8mm - 211.9mm
Media Thickness	Matte paper label: 0.178mm, Synthetic label: 0.235mm, Glossy paper label: 0.174mm, Glossy film label: 0.164mm, High glossy paper label: 0.188mm			
Black Mark Size	Width: 18.4 mm or over, Length: 4 - 25.4 mm			
Die-cut Label Gap	2 - 6 mm (If the gap is 3 mm or less, need to adjust the detector)			
Roll Diameter	Max. 203.2mm		Max. 152.4mm	
Roll Paper Core Inner Diameter	76.2 mm ±0.5 mm			
Number of Folds	750 or less			
Winding Direction	Face Out			
<b>Autocutter Life</b>				
Die-cut Label	Matte paper, Glossy paper, Glossy film, High glossy paper: 1,500,000 cuts Synthetic: 500,000 cuts	N.A.	Matte paper, Glossy paper, Glossy film, High glossy paper: 1,500,000 cuts Synthetic: 500,000 cuts	N.A.
Continuous Label	Glossy paper: 300,000 cuts Matte paper, High glossy paper: 200,000 cuts Synthetic, Glossy film: 100,000 cuts	N.A.	Glossy paper: 300,000 cuts Matte paper, High glossy paper: 200,000 cuts Synthetic, Glossy film: 100,000 cuts	N.A.
<b>Temperature/ Humidity</b>				
Printing	5 - 35 °C, 20-80% RH			
Barcode Printing	15 - 35 °C, 20-80% RH			
Storage	When packed (ink not charged): -20 to 60°C, 5 to 85% RH without condensation			
<b>Overall Dimensions</b>				
W x D x H (Not including protrusion)	340 x 565 x 326 mm		444 x 515 x 326 mm	
<b>Weight</b>	Approx. 22.5kg	Approx. 22.8kg	Approx. 25.5kg	Approx. 26.3kg
<b>Power Supply</b>	Built-in power supply			
<b>Power Consumption</b>				
Operating	100V: Average Approximately 39.4W 230V: Average Approximately 38.6W		100V: Average Approximately 39.5W 230V: Average Approximately 38.7W	
Stand-by	100V: Average Approximately 7.51W, 230V: Average Approximately 5.82W			
Power Off State	100V: Average Approximately 0.08W, 230V: Average Approximately 0.24W			
<b>Rated Voltage</b>	100 - 240 VAC			
<b>Rated Frequency</b>	50 - 60 Hz			
<b>EMC Standards</b>	Europe: CE Marking, North America: FCC Class A, CAN ICES-3 (A)/NMB-3 (A), Oceania: Radiocommunications (Electromagnetic Compatibility) Standard, Class A			
<b>Operating Systems</b>	Windows 10, 8.1, 8, 7 SP1, Vista SP2, XP SP3 or later, Server 2019, 2016, 2012 R2, 2012, 2008 R2, 2008, 2003 R2 (32-bit), Mac OS X 10.6.8, Mac OS X 10.7.x, Mac OS X 10.8.x, Mac OS X 10.9.x, Mac OS X 10.10.x, Mac OS X 10.11.x, Mac OS X 10.12.x, Mac OS X 10.13.x, Mac OS X 10.14.x			

### Dimensions & Weight

**C6050A / C6050P**  
Weight: **C6050A:** 22.5 kg  
**C6050P:** 22.8 kg



**C6550A / C6550P**  
Weight: **C6550A:** 25.5 kg  
**C6550P:** 26.3 kg



\*1 Matte paper label, Synthetic label

\*2 Glossy paper label, Glossy film label,  
High glossy paper label

### Main Unit

**C31CH76106**  
CW-C6050A-COLOR INKJET PRINTER (CUTTER)  
**C31CH76206**  
CW-C6050P-COLOR INKJET PRINTER (PEELER)  
**C31CH77106**  
CW-C6550A-COLOR INKJET PRINTER (CUTTER)  
**C31CH77206**  
CW-C6550P-COLOR INKJET PRINTER (PEELER)

### Option

**C32C881301**  
Paper Holder C6000 (for C6050 Series)  
**C32C881101**  
Paper Holder C6500 (for C6550 Series)

### Consumable

**C13T44G100**  
SJC40P-K:INK CART. FOR CW-C6050/C6550  
**C13T44G500**  
SJC40P-MK:INK CART. FOR CW-C6050/C6550  
**C13T44G200**  
SJC40P-C:INK CART. FOR CW-C6050/C6550  
**C13T44G300**  
SJC40P-M:INK CART. FOR CW-C6050/C6550  
**C13T44G400**  
SJC40P-Y:INK CART. FOR CW-C6050/C6550  
**C33S021501**  
SJM8600:MAINT. BOX FOR CW-C6050/C6550

© 2023 Epson Singapore Pte Ltd. All Rights Reserved.  
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is a registered trademark of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing  
Printed Aug 2023

## EPSON COLORWORKS LABEL PRINTERS COLORWORKS C6050A/C6050P/C6550A/C6550P

# EPSON



## MAXIMISE EFFICIENCY, MINIMISE EFFORT, ACHIEVE PRODUCTIVITY.

### Labelling Solutions Made Convenient.

Redefine productivity with Epson's ColorWorks C6000 series colour label printers. Integrated with auto-cutter<sup>1</sup> or auto-peeler<sup>2</sup> capabilities, the hassles of manual cutting and removing of label backing papers are eliminated. The auto-cutting<sup>1</sup> function not only enables individualised print job cuts but also offers the flexibility of customising the set amount of pieces required. The auto-peeler feature is ideal for on-demand print-and-apply colour label printing installations. Beyond efficient functionalities, these ColorWorks printers deliver quality prints with crisp images that are sure to impress any audience.



### Optimise Productivity

Auto-cutter<sup>1</sup> and peeler<sup>2</sup> deliver fast colour label printing to improve efficiency in the production line.

### Seamless Connectivity

High technology compatibility allows for seamless integration into existing host systems across multiple platforms.

### Astounding Print Quality

Variable droplet size of up to 1200 dpi resolution ensures incredibly crisp images.

For latest specifications, visit [www.epson.com.sg/labelprinting](http://www.epson.com.sg/labelprinting) or call 800 120 5564.

[EpsonSingapore](#) [EpsonSingapore](#) [EpsonSoutheastAsia](#) [EpsonSingapore](#)

Epson Singapore Pte Ltd 438B Alexandra Road, #04-01/04, Block B, Alexandra Technopark, Singapore 119968. Tel: (65) 6586-5500 Fax: (65) 6271-9755  
Epson Customer Care Center 100G Pasir Panjang Road, #01-09, Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Opening hours: Monday - Friday, 9am to 5pm. Closed on Saturday, Sunday and Public Holiday.  
Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for updated opening hours.

<sup>1</sup> Applicable for C6050A and C6550A only. <sup>2</sup> Applicable for C6050P and C6550P only.







When it comes to on-demand colour label printing solutions, enjoy greater productivity without compromising on print quality. The ColorWorks label printers possess functionalities that offer unyielding efficiency and convenience to printing performance that delivers extraordinary output.

### Enhanced Production Capability

Epson's C6050A and C6550A ColorWorks printers come with a built-in auto-cutter that supports individual piece-by-piece cuts, or programmed set pieces of cuts by batch. This includes cutting that is based on the pre-fixed number of prints or cutting at the end of a print batch.

The C6050P and C6550P's peel-and-present model improves efficiency and convenience by eliminating the need for manual peeling. When integrated with a print-and-apply system through the use of label applicators, a more seamless workflow experience is enabled, enhancing productivity in the production line.

### Crisp Images

A higher dpi translates to a clearer, more detailed output. With a print resolution of up to 1200 dpi, variable droplet size and Spot Colour Matching\* that assures greater colour accuracy, the C6050A/P and C6550A/P ColorWorks label printers series produce incredible print images.



Industrial label



Food and beverage label



Medication label

\* Spot colour matching is subjected to the printer's ink spectrum capability.

### High Connectivity

Compatible with a wide range of technologies including multi-platform operating systems such as Windows, Mac and Linux along with application software including SAP and legacy systems using ZPL II commands, the set-up process becomes effortless and can be integrated into nearly any workflow seamlessly.



### World's First Peeler-equipped Inkjet Label Printer\*

Making it possible to apply labels immediately after printing, the C6050P and C6550P can be used in any desktop printing operations. When integrated with a label applicator in the production floor, it offers unique print-and-apply system that can be used both online and offline.




### Easy Use and Maintenance

Intuitive designs including easy-load spindle, flexible paper cover and frontal ink cartridge loading allows for quick changes between label sizes, easy access when loading paper and effortless replacement of ink cartridges. Equipped with a 2.7" colour LCD, printer status can be checked and configured when required. Enjoy seamless installation in a variety of environments with the ColorWorks' space-saving design.



### Durable, Exceptional Quality Inks

The ColorWorks C6000 series incorporates UltraChrome DL pigment inks that comply with BS 5609 certification for GHS compliant labelling. These inks possess high pigment density, resin coating for more stability, and an even surface and gloss, making it perfect for professional display and sales.

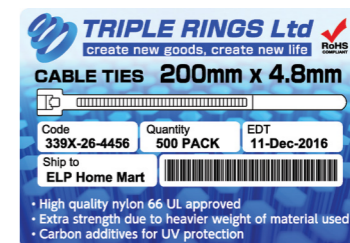

Epson pigment ink

Epson pigment ink is not water soluble and firmly binds to media fibers, resisting water and other moisture.



Dye-based ink

Conventional dye-based ink is water soluble so printouts can be negatively affected by water and other moisture.



### PrecisionCore TFP Printhead

With its stunning ability to scale while delivering unbeatable speed and precision, the printhead's perfectly round nozzles dispense precise ink droplets, which guarantee consistent superior image quality.

\* Based on a survey conducted by Epson as of September 22, 2019.