

BRING BOLD IDEAS TO LIFE WITH UNMATCHED PRINT VERSATILITY.



Expand your business potential with fast, flexible, and high quality prints and transfers.

Designed to meet the demands of custom apparel shops, promotional product companies, and businesses seeking versatile, high-performance print solutions, the Epson SureColor G6030 is a 35-inch DTFilm printer built for speed, reliability, and outstanding quality. Powered by PrecisionCore Micro TFP printheads, it delivers vibrant, high-resolution transfers on a wide range of materials – from fabrics to unique substrates. Direct to film, direct to fun, take apparel decorating to new heights and explore creative ways to produce stunning apparel.




Print Resolution
1200 x 600 dpi



1.6L
Ink Supply Unit



In-Built Cutter
Function



Up To 0.5mm
Media Thickness



Versatile
Media Handling



Low
Maintenance

ENGINEERED FOR good



Optimised Performance

The PrecisionCore MicroTFP printhead delivers high-speed, high-quality prints, while the 1.6L Ink Supply Unit reduces refill frequency, ensuring longer, uninterrupted production.

Low-Maintenance Operation

The White Ink Circulation system, fabric wiper, and separated cap station with suction cap eliminate the need for daily manual operation, reducing downtime and enhancing efficiency.

Post-Processing Efficiency

The Cutting Timer function improves post-processing efficiency by ensuring optimal timing during manual handling, preserving print quality and preventing damage.


Advantages of DTFilm Printing

Direct-to-Film (DTFilm) is an advanced printing technology that involves printing designs onto a special transfer film, which is then applied to a variety of materials. Unlike Direct-to-Garment (DTG) printing, which is primarily suited for fabrics, DTFilm offers greater versatility by allowing designs to be transferred onto materials such as polyester, nylon, cotton, blends, denim, fleece, canvas, and even unconventional items like wood and cork. This makes DTFilm ideal for printing on products with uneven surfaces, like the tops of pockets, or non-fabric goods that DTG printers may struggle with.

Designed for Efficiency and Usability

Precision Handling

The Cutting Timer function allows user to set a countdown, ensuring the film stays securely in place and preventing wastage.

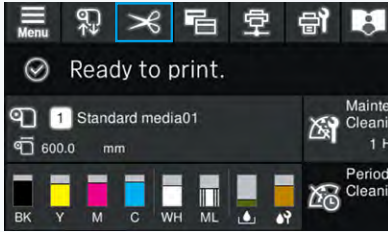

Intuitive Status Display

The 4.3" colour LCD touch panel provides easy access to printer status and settings, enhancing user control.



High-Capacity Ink Supply

Epson's 1.6L UltraChrome DF ink packs minimise downtime and maintenance by reducing the frequency of ink replacements.



On-Demand Printing Across Various Media

The SC-G6030 supports a wide range of print modes to accommodate diverse customer needs and application requirements.


| | High Quality Mode | | Production Mode | | Colour Ink Mode | White Ink Mode |
|--------------------|---|----------|---|----------|--------------------|-------------------------|
| Productivities* | 3.4 m²/h | 4.2 m²/h | 5.6 m²/h | 8.2 m²/h | 16 m²/h | 16 m²/h |
| Number of pass | 10 | 8 | 6 | 4.1 | 4.1 | 4.1 |
| Usage | Large size prints that require high quality | | Small size prints that require productivity | | Logos and markings | White logo and markings |
| Application (E.g.) | | | | | | |

* Productivity specs are evaluated under internal conditions.

Stable Operation with Easy Maintenance


Advanced Ink Circulation

The white ink circulation system ensures stable and uninterrupted printing by preventing clogging and removing coagulated material from the ink flow path. Spacer materials further support print stability by helping the ink recover from sedimentation.

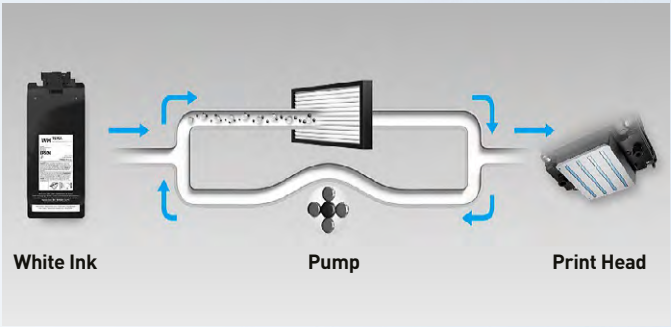

Self-Cleaning Fabric Wiper

The SC-G6030 uses a replaceable fabric wiper that keeps the printhead nozzles clean with minimal maintenance.

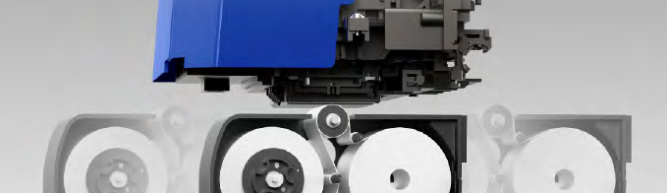

Optimising Cleaning for Longer Lifespan

The separated cap station and suction cap design reduces daily manual cleaning by allowing independent maintenance. An automatic cleaning system uses maintenance liquid to remove dried ink from the suction cap, helping minimise downtime and extend component lifespan.

Auto Suction Cap Cleaning

This feature helps maintain print head performance by automatically cleaning the nozzles and suction cap. Users can choose from three cleaning levels, based on the level of maintenance needed. It is especially useful for white ink, which requires more frequent cleaning.



Compact and efficient, the SC-G6030 offers **all-front access** for hassle-free use in limited spaces.

Streamlined Printing with Real-Time Monitoring

Epson Cloud Solution PORT

This cloud-based platform allows users to check daily operation status and place order for printheads and other self replaceable parts.

Find out more at www.epson.com.sg/cloud-solution-port



Epson Edge Print PRO (RIP)

Epson's textile printers integrate seamlessly with RIP software, enabling instant printing with no data spooling delays. Easy to use, even for beginners, it reduces misprints, setup time, and total cost of ownership. The software also supports Epson's advanced image processing technologies, ensuring exceptional print quality with smooth gradations and minimal graininess.



SPECIFICATIONS

| | |
|-------------------------------|--|
| MODEL NUMBER | SC-G6030 |
| SKU Number | C11CL77402 |
| Printing Technology | |
| Technology 1 | PrecisionCore Inkjet Technology |
| Technology 2 | Variable-Sized Droplet Technology |
| Printhead | PrecisionCore MicroTFP Printhead |
| Nozzle Configuration | The number of nozzles: 3,200 nozzles 400 nozzles x 2 row x 4 chips |
| Maximum Resolution | 1,200 x 600 dpi |
| Printing Specifications | |
| Maximum Print Speed | |
| 300 x 600 dpi ^{*1} | 246 m ² /h (1.1 pass), 193 m ² /h (1.5 pass), 144 m ² /h (2.1 pass), 99 m ² /h (3.1 pass) |
| 600 x 600 dpi ^{*2} | 144 m ² /h (2.1 pass), 126 m ² /h (2.5 pass), 99 m ² /h (3.1 pass), 72 m ² /h (4.3 pass) |
| 600 x 1200 dpi ^{*3} | 63 m ² /h (5.0 pass) |
| 600 x 1200 dpi ^{*3} | 51 m ² /h (5.0 pass HD) |
| 1200 x 1200 dpi ^{*4} | 28 m ² /h (9.0 pass HD) |
| Margin (Roll Paper) | 3 mm (Right/Left), 5 mm (Top) 5 mm (Bottom) |
| Ink System | |
| Ink Types | Pigment Ink |
| Ink Brand Name | UltraChrome DF Ink |
| Colours | Cyan, Magenta, Yellow, Black, White |
| Ink Capacity | 1.6L |
| Ink Case | Ink Supply Unit |
| Media Handling | |
| Paper Path | Roll (Single Roll) |
| Paper Feed Method | Friction Feed |
| Maximum Roll Diameter | Max. 150 mm |
| Maximum Roll Weight | Max. 10 Kg |
| Paper Width (Roll) | 254 mm to 900 mm (10" to 35.4") |
| Paper Thickness | Up to 0.5 mm |
| Fixing | |
| Heat Press Condition | Heater Temperature: 200°C, 40s |
| Control Panel | 4.3" Colour LCD Touch Panel |
| Connectivity | |
| Interfaces | Super Speed USB, 100BASE-TX/1000BASE-T |
| Printer Language | ESC/P raster |
| Memory | 1 GB |
| Electrical Specifications | |
| Voltage | AC 100 – 240V |
| Rated Current | 3.4 – 1.6A |
| Power Consumption | Operating: Approx. 65W Ready: Approx. 30W Sleep: Approx. 6.0W Power Off (Standby): Approx. 0.2W |
| Environmental Conditions | |
| Temperature | Operating: 10°C to 35°C / Storage: -20°C to 40°C |
| Humidity | Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) |
| Sound Pressure | Approx. 51.1db(A) |
| Sound Power | Approx. 6.98B(A) |
| Supported Operating System | |
| PC | Windows 10/8.1/8/7 (32/64 bit), CPU: Core 2 Duo 3.05 GHz Memory: 8GB or more, HDD (Free space during installation): 50GB or more |
| Mac | Mac OS X (10.7 or later), CPU: MultiCore 3.0 GHz, Memory: 4GB or more, HDD (Free space during installation): 2GB or more |
| Utility Software | |
| Bundled in CD | Epson Software Updater, Epson Net Print, Epson Net Setup, Epson Net Config SE |
| Web Delivery | Epson Edge Print Pro, Epson Edge Colour, Firmware Updater, Epson Edge Dashboard |
| Certifications | |
| Safety | USA and Canada (NRTL Certified), Mexico (NOM), Argentina (S-mark), EU (Low Voltage Directive), UK (UKCA), Germany (GS), Morocco, Ukraine, Singapore, Cambodia, India |
| Electromagnetic | USA (FCC), Canada (ICES), EU (EMC Directive), UK (UKCA), Morocco, Ukraine, Australia (RCM), Korea (MSIP), Japan (VCCI) |
| Ink | Eco-Passport, GOTS, CPSIA |

^{*1} With 300 x 300 dpi 2 Half Tone Layers.
^{*2} With 300 x 300 dpi 4 Half Tone Layers.
^{*3} With 300 x 300 dpi 8 Half Tone Layers.
^{*4} With 300 x 300 dpi 16 Half Tone Layers.

Dimensions & Weight

Weight: 129 kg (without ink cartridges)



Options and Consumables

| | |
|-------------------------|------------|
| Black | C13T57X190 |
| Cyan | C13T57X290 |
| Magenta | C13T57X390 |
| Yellow | C13T57X490 |
| White | C13T57XA90 |
| Maintenance Liquid | C13T57XB90 |
| Cleaning Liquid | C13T57Y100 |
| Auto Cutter Spare Blade | C13S902006 |
| Waste Ink Bottle | C13T724000 |
| Maintenance Kit | C13T736200 |
| Head Cleaning Set | C13S400262 |

What's In The Box

- Main Unit
- Roll Adapter
- Stand For Each Side, Assy
- Stand Stay
- Loading Pole
- Waste Ink Bottle & Tray
- Maintenance Kit
- Ink Charging Tool
- Epson Edge Print PRO
- Instruction Manual*
- Warranty Sheet*
- AC Cable*
- Nozzle Refresh Tool

*Availability varies by region.

©2025 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing.
Printed June 2025

