

# LEADING THE WAY IN HIGH BRIGHTNESS PROJECTION.

Next Level Quality

# SEE ULTRA

Get ready to shine wherever you go with Epson's range of high brightness projectors.

Discover colour brightness in outstanding levels of up to 30,000 lumens – delivering stunning images and vibrant colours with Epson 3LCD technology. Experience installation flexibility with usage in different environments to meet diverse needs. Achieve peace of mind with high reliability of up to 20,000 hours\* maintenance free – giving users the capability to make a lasting impact on a powerful stage.

ENGINEERED FOR good



\*20,000H life for laser light source : Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments. Replacement of parts other than the light source may be required in a shorter period. 4K Crystal Motion and IP5X Dustproof features are applicable to selected models only.

Choose an Epson high brightness projector that's right for you

## TECHNICAL SPECIFICATIONS

**Big Meeting Rooms /  
Lecture Rooms**



**Lecture Hall / Auditoriums /  
Digital Signages**



**Large Venues /  
Events**



**EB-PU1006W** 6,000lm

**EB-PU1007W** 7,000lm

**EB-PU1008B** 8,500lm

**EB-PU2010B** 10,000lm

**EB-PQ2008B** 8,000lm

**EB-PQ2010B** 10,000lm

**EB-PU2213B** 13,000lm

**EB-PU2216B** 16,000lm

**EB-PU2220B** 20,000lm

**EB-PQ2213B** 13,000lm

**EB-PQ2216B** 16,000lm

**EB-PQ2220B** 20,000lm

**EB-L30000UNL** 30,000lm

**FACT**

High brightness projectors are designed to deliver unyielding display performance, engineered to shine outstandingly even in well-lit environments to enhance your presentation experience.


LASER LIGHT SOURCE				
	EB-PU1000 / 2010 Series	EB-PU2200 Series	EB-PQ2200 Series	EB-L30000UNL
				
<b>Basic Specification</b>	3LCD			
Technology	3LCD			
White Brightness <sup>*1</sup>	6,000lm - 10,000lm	13,000lm - 20,000lm	8,000lm - 20,000lm	30,000lm
Colour Brightness <sup>*1</sup>	6,000lm - 10,000lm	13,000lm - 20,000lm	8,000lm - 20,000lm	30,000lm
Contrast Ratio	Over 5,000,000:1	Over 5,000,000:1	Over 5,000,000:1	Over 5,000,000:1
Resolution	WUXGA (w/ 4KE)	WUXGA (w/ 4KE)	4K UHD	WUXGA (w/ 4KE)
<b>Installation Flexibility</b>				
Lens Shift	●	●	●	●
360 degree Projection	●	●	●	●
Portrait Projection	●	●	●	●
Interchangeable Lens	10 Optional Lens <sup>*2</sup> (For EB-PU2010B) 11 Optional Lens <sup>*2</sup> (For EB-PU1006W/PU1007W/ PU1008B)	11 Optional Lens	11 Optional Lens	9 Optional Lens
HD BaseT	●	●	●	●
Lens Position Memory	●	●	●	●
Calibration Camera	Optional (ELPEC01)	Optional (ELPEC01)	Optional (ELPEC01)	Built-in
<b>Image Geometric Correction Functions</b>				
Keystone Correction	●	●	●	●
Quick Corner	●	●	●	●
Point Correction	●	●	●	●
Curved Surface	●	●	●	●
Corner Wall	●	●	●	●
Geometric Correction Memory	●	●	●	●
<b>Image Enhancement</b>				
DICOM SIM Mode	●	●	●	●
Frame Interpolation	●	●	●	●
Super Resolution	●	●	●	●
Six Axis Colour Adjustment	●	●	●	●
<b>Multi Projection</b>				
Edge Blending	●	●	●	●
Multi-Projection Colour Mode	●	●	●	●
Projector ID	●	●	●	●

<sup>\*1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions.

Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.


<sup>\*2</sup> ELPLM08 and ELPLX01 are not applicable for EB-PU2010B. ELPLX02 is not compatible for EB-PU1006W/PU1007W/PU1008B.

# Vibrant Colours, Greater Details

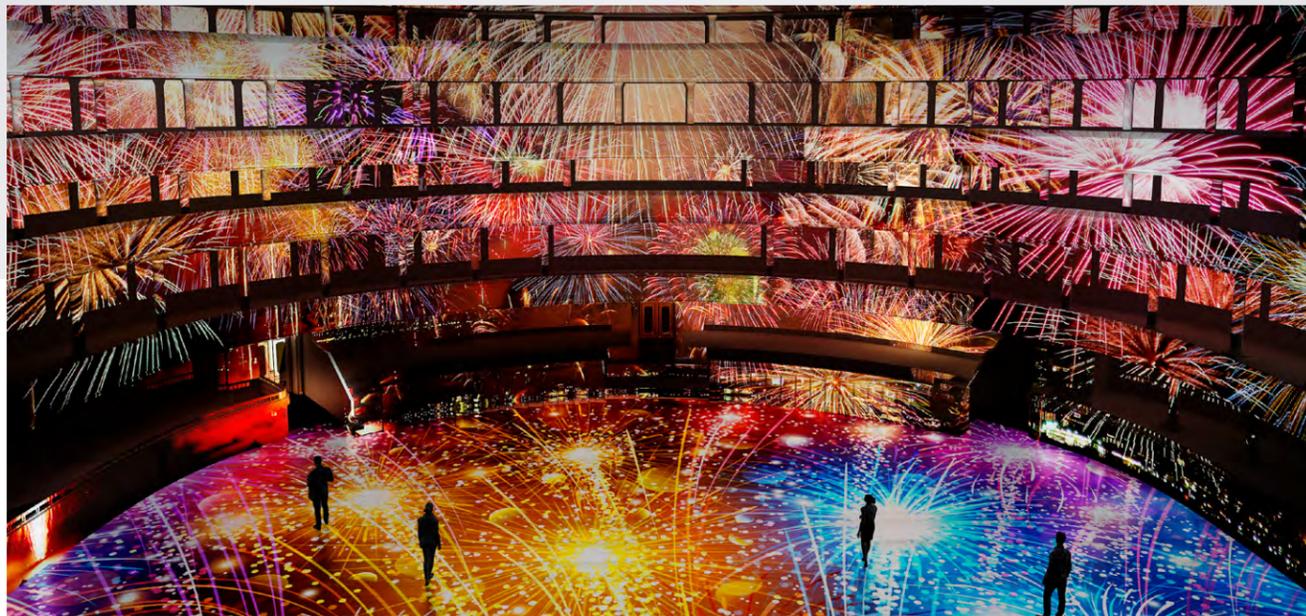


## Advanced Colour Adjustment

With the colour adjustment function, you can easily adjust the hue, saturation and brightness for each component of RGBCMY to match your preferences.

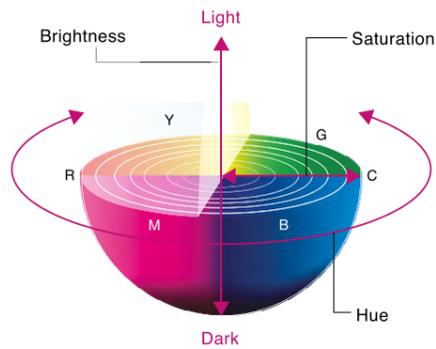

## High Dynamic Range

These projectors support HDR10\* and Hybrid Log-Gamma to provide more precise detailing for light and dark gradation contents, as well as more vibrant images and improved contrast.

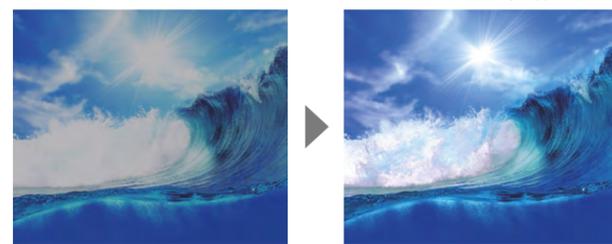


SDR (Standard Dynamic Range)      HDR (High Dynamic Range)

\*EB-L30000UNL only supports HDR.


## Scene Adaptive Gamma Correction Except for EB-L30000UNL

Epson's unique image quality adjustment functions allow for image quality adjustments according to content. These include Scene Adaptive Gamma Correction, which analyses the image frame by frame and automatically adjusts the gamma level for optimal contrast, preventing crushed blacks in dark scenes and clipped whites in bright scenes, resulting in a natural-looking image.

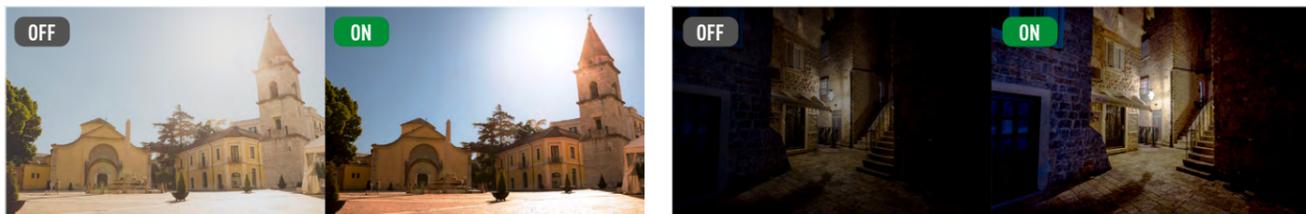

# High Definition Images with 4K and 4KE Resolution

Leveraging on Epson's state-of-the-art 4K Crystal Motion and 4KE technology to deliver extraordinary detail and captivating visuals.

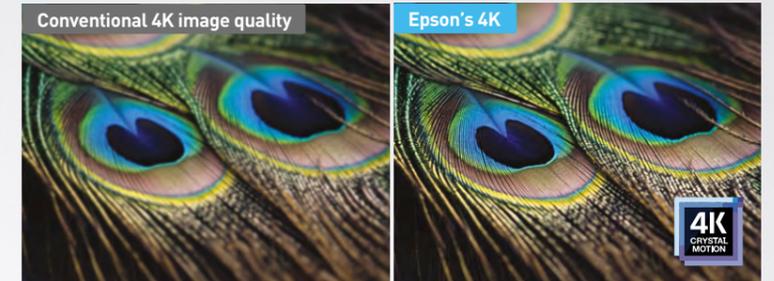

## Brilliant Display

Enjoy richer contrast with Epson's newly-developed laser optical engine system. Combined together with the vibrant and realistic colours from the 3LCD panels, you enjoy more lifelike projections.




# Versatility in Projection and Placements

## Simple Stacking Function

Require External Camera

Stack easily with a remote controller from the OSD menu instead of the conventional PC, or wi-fi router. This process can also be achieved quickly using the daisy chain by SDI signal IN/OUT support\*, reducing hassle and installation time. Alternatively, take advantage of the Auto Camera Assist for stacking to reduce installation time to a mere five minutes without additional fuss.

\*Except PQ2008B and PU1000 series. Requires HDMI splitter for PQ2008B and PU1000 series.

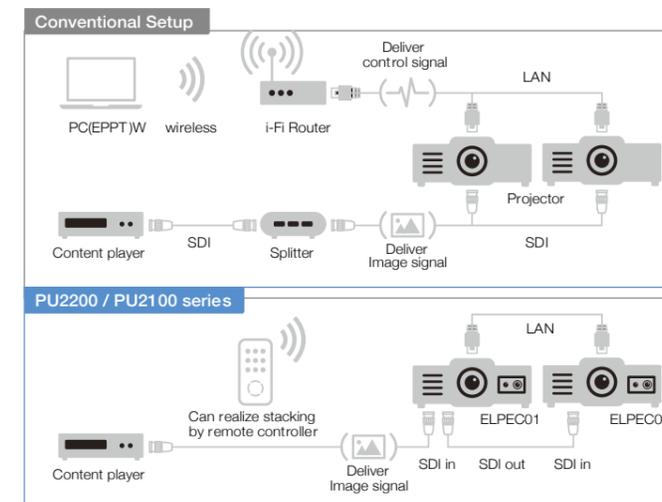

## ELPEC01 Optional Camera

Using this optional camera makes sophisticated projection applications easy. Speed up your multi-projector colour calibration, geometric correction and edge blending solutions by pairing it with Epson Professional Tool software.



# Higher Reliability, Stunning Results



## Wide Curved and Corner Surfaces Projection


Fit your projection images nicely even on non-flat surfaces. You can now create stunning projection images on wide curved surfaces and corner walls, making it ideal for advertising and promotions.

## Benefits of Being Smaller


The smaller size and lighter weight of the projectors improve transportability and simplify warehousing. Combined with flexible installation options, these features offer substantial cost savings for our customers.




### Why Smaller is Better




Save labour costs



Save delivery costs




Save storage costs



Unhindered by space constraints

## Sophisticated Liquid Cooling System


The PQ2200 series\* builds upon the advanced liquid-cooling technology of the PU2200 series\*, leveraging over a decade of research, development, and industry expertise. This unique liquid-cooling system efficiently cools the optical engines and laser light source units, enabling the creation of more compact products.

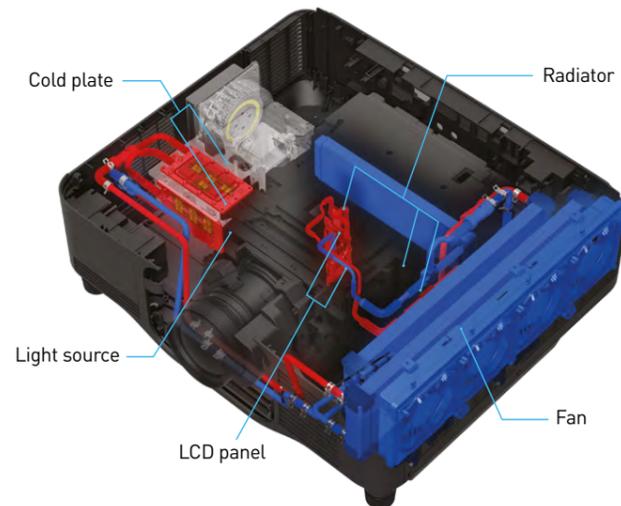

\*Limited to PQ2213/PQ2216/PQ2220.


## Versatile Point Correction

In addition to making precise adjustments with point correction for 33x33 grids, installation is now made easier with support for correcting points vertically or horizontally in a single column simultaneously.

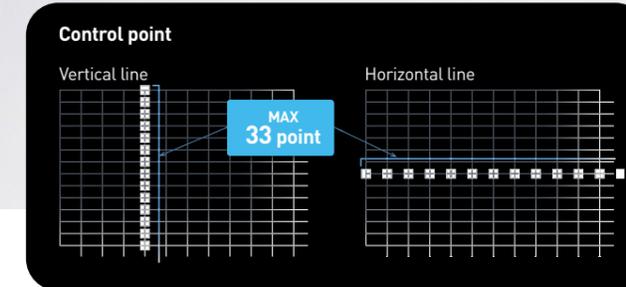

## Ultra Short-Throw Lens Support

The PU/PQ2200 series supports zero offset lenses that utilise advanced optical design and manufacturing technologies. With a 0.35 throw ratio and zero offset, these versatile lenses are perfect for installations in narrow spaces and rear-projection applications.

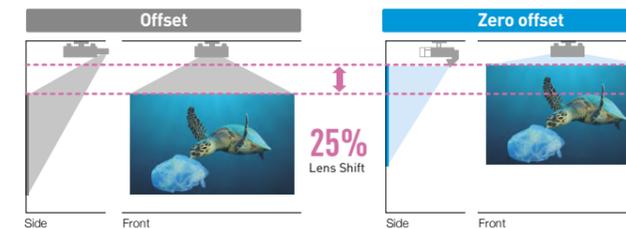

## 21:9 Support

The PU/PQ2000/2200 series support 21:9 aspect ratio, making it ideal for hybrid meeting solutions that require high brightness and excellent image quality.



## Broad Lineup of Lenses

The PU/PQ2200 series can be used without modification with the same lineup of lenses as PU20/2200 series.



\* The PQ2000/2200 series supports LW05, LU03, and LM08 lenses with certain limitations. Note: A decrease in brightness and other functional restrictions may apply. For more details, please refer to manual.

## Improved Durability For Better Maintenance

### High durability with IP5X certified Optical Engine and Laser Light Source Module


The EB-PU/PQ2200 series is equipped with IP5X certified Optical Engines and Laser Light Source Modules according to IEC standard 60529\*, offering outstanding dust protection. In addition, these two key components are hermetically sealed to maintain their performance even in dusty environments.

\*JIC C 0920 compliant in Japan.

### Filterless Design For Hassle-Free Maintenance\*\*

In addition to sealed main components, circuit boards found to be at risk of dust-related short-circuit during testing are coated and protected. Thanks to this dustproof construction, the EB-PU/PQ2200 series is filter-free, eliminating the need for filter changes.

\*\*The filterless design may not be suitable for all environments. An enclosure is recommended for environments including, but not limited to, those with oil, moisture, or salt.

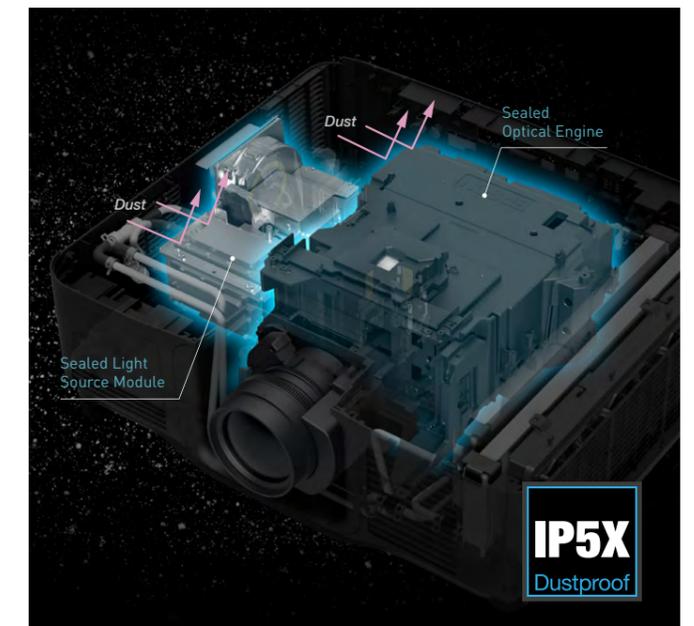

# Smooth Connection, Efficient Control




## Epson Projector Config Tool for Easy Set Up

Using NFC wireless communications technology to change projector settings and check equipment information, the Epson Projector Config Tool is an app that allows you to configure network and projection settings in advance, even when the projector is switched off. Allowing management across your fleet of projectors, this tool helps to reduce time and effort required, increasing efficiency.




Comparison of setup time using USB memory method and Epson Projector Config Tool app in warehouse:

**✗ 10 steps in 67 minutes**

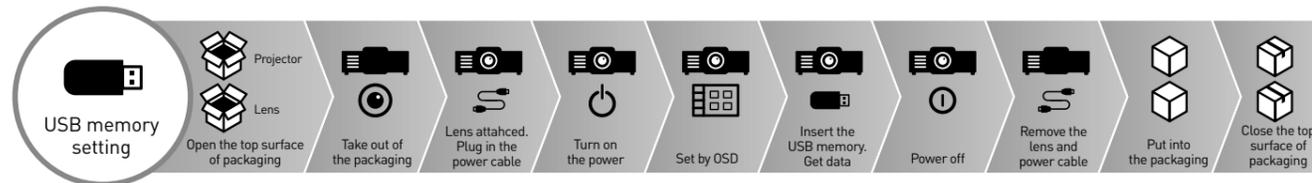

**✓ Just 5 steps in 7 minutes\***

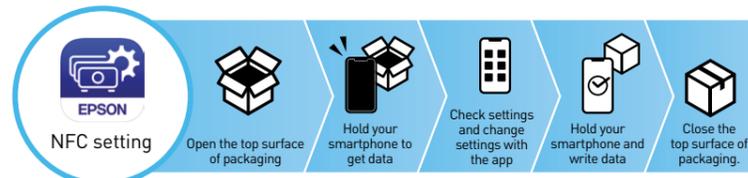

Reduce the number of steps by **50%**  
and save **1-hour** of your time  
VS using USB memory setting!\*

\*Based on Epson's internal acceleration tests. Only for EB-PU/PQ series.



## Epson Projector Professional Tool

Match projected images' borders to project a vivid and clear supersized image with the Epson Projector Professional Tool. With the tool, settings that previously required separate remote controller operations for each projector can also all be done on a single PC, greatly reducing installation time and effort.



## Epson Projector Management Connected


Epson Projector Management Connected (EPMC) is a cloud-based solution that lets you monitor, control, and manage multiple projectors remotely through a web browser. It streamlines maintenance with real-time alerts, simplifies scheduling, and enables remote power and input controls – ideal for IT admins managing large or distributed installations.



Note: Some functions do not support Epson Projector Professional Tool. Network connection is a requirement for use of Epson Projector Professional Tool and Epson Projector Management Connected Software.

## Auto-Scaling

This revolutionary function simplifies the complicated scaling of images from multiple projectors so you can do it easily. Just select the screen layout from the pre-set menu and the projector automatically sets the slice area, scaling and edge-blend position.

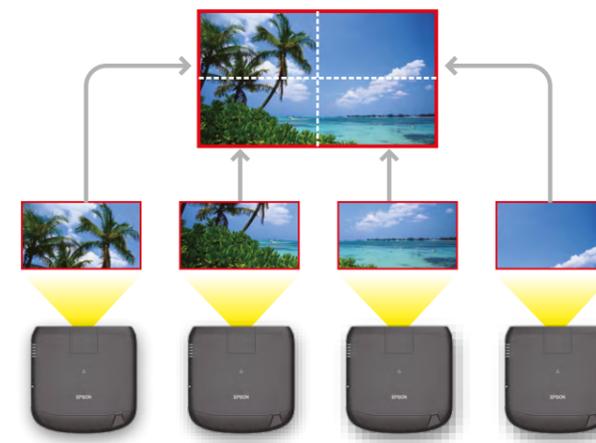

## Web Control with Smart Device Support

Use a computer web browser or smart device to adjust your projector settings. The newly designed OSD Control Pad function allows you to control the OSD menu and even allows you to view the projection image from remote location using the projector's in-built camera\*.



\*In-built camera is only applicable to EB-L30000UNL. EB-PU/PQ series requires ELPEC01 external camera module.

# LENS SPECIFICATIONS

## ULTRA SHORT THROW LENS

MODEL NUMBER	ELPLX01WS/ELPLX01S	ELPLX02S	ELPLX03
PRODUCT CODE	V12H004X0A / V12H004Y0A	V12H004X0B	V12H004X03
			
Projection Lens: Type	Powered: Focus / Distortion	Powered: Focus / Distortion	Powered: Focus / Distortion
F-Number	1.9	1.9	2.2
Focal Length	5.8 mm	8.0 mm	11.16 mm
Zoom Ratio	N/A	N/A	N/A
Weight	3,500g	5,000g	13,000g
Screen Size (Projected Distance)	100" - 1000" Throw ratio 0.35	PU series 100" - 1000" Throw ratio 0.35 PQ series 100" - 1000" Throw ratio 0.34	120" - 1000" Throw ratio 0.35
Lens Shift Range	Powered Vertical: +50% to +67% (H Center) Horizontal: -10% to 10% (Vertical +50%)	PU series Powered Vertical: ±45% to 70% (H Center) Horizontal: ±15% (V Center) PQ series Powered Vertical: ±45% to 75% (H Center) Horizontal: ±13% (V Center)	Powered Vertical: +45% to +70% (H Center) Horizontal: ±15% (V Center)

## SHORT THROW LENS

MODEL NUMBER	ELPLU03S	ELPLU04	ELPLU05
PRODUCT CODE	V12H004UA3	V12H004U04	V12H004U05
			
SPECIFICATION OF MAIN PARTS	Projection Lens: Type Powered: Zoom / Focus / Distortion		
F-Number	2.0 - 2.3	2.0 - 2.1	2.4 - 2.6
Focal Length	11.1 - 13.1 mm	14.8 - 17.7 mm	28.4 - 34.0 mm
Zoom Ratio	1 - 1.2	1 - 1.2	1 - 1.21
Weight	2,300g	3,100g	9,400g
Screen Size (Projected Distance)	PU1000 series 80" - 1000" Throw ratio 0.65 - 0.78 PU2000 series 80" - 1000" Throw ratio 0.48 - 0.57 PQ series 80" - 1000" Throw ratio 0.46 - 0.57	PU1000 series 50" - 1000" Throw ratio 0.87 - 1.05 PU2000 series 60" - 1000" Throw ratio 0.64 - 0.77 PQ series 60" - 1000" Throw ratio 0.62 - 0.75	100" - 1000" Throw ratio 0.90 - 1.09
Lens Shift Range	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±24% (H Center) Horizontal: ±8% (V Center) PQ series Powered Vertical: ±25% (H Center) Horizontal: ±8% (V Center)  PU2000 series: If input signal is 1080p, Powered Vertical: ±32% (H Center) Horizontal: ±10% (V Center)	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center) PQ series Powered Vertical: ±64% (H Center) Horizontal: ±16% (V Center)	Powered Vertical: ±55% (H Center) Horizontal: ±25% (V Center)



# LENS SPECIFICATIONS

## ZOOM LENS

MODEL NUMBER	ELPLW05	ELPLW06	ELPLW07
PRODUCT CODE	V12H004W05	V12H004W06	V12H004W07
			
SPECIFICATION OF MAIN PARTS	Projection Lens: Type Powered: Zoom / Focus / Distortion		
F-Number	2.0 - 2.2	1.8 - 2.3	2.2 - 2.5
Focal Length	17.6 - 24.3 mm	27.3 - 37.0 mm	40.6 - 55.2 mm
Zoom Ratio	1 - 1.4	1 - 1.4	1 - 1.37
Weight	1,450g	2,950g	9,500g
Screen Size (Projected Distance)	PU1000 series 50" - 1000" Throw ratio 1.04 - 1.46 PU2000 series 60" - 1000" Throw ratio 0.77 - 1.07 PQ series 60" - 1000" Throw ratio 0.74 - 1.04	PU1000 series 50" - 1000" Throw ratio 1.62 - 2.22 PU2000 series 60" - 1000" Throw ratio 1.19 - 1.62 PQ series 60" - 1000" Throw ratio 1.15 - 1.57	100" - 1000" Throw ratio 1.29 - 1.76
Lens Shift Range	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±24% (H Center) Horizontal: ±10% (V Center) PQ series Powered Vertical: ±25% (H Center) Horizontal: ±8% (V Center)	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center) PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)	Powered Vertical: ±65% (H Center) Horizontal: ±30% (V Center)

\*Not supporting power distortion

MODEL NUMBER	ELPLW08
PRODUCT CODE	V12H004X0A / V12H004Y0A
	
SPECIFICATION OF MAIN PARTS	Projection Lens: Type Powered: Zoom / Focus / Distortion
F-Number	2.0 - 2.2
Focal Length	19.7 - 27.5 mm
Zoom Ratio	1 - 1.4
Weight	3,050g
Screen Size (Projected Distance)	PU1000 series 50" - 1000" Throw ratio 1.18 - 1.66 PU2000 series 60" - 1000" Throw ratio 0.86 - 1.21 PQ series 60" - 1000" Throw ratio 0.83 - 1.17
Lens Shift Range	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center) PQ series Powered Vertical: ±64% (H Center) Horizontal: ±16% (V Center)

MODEL NUMBER	ELPLM08	ELPLM10	ELPLM11
PRODUCT CODE	V12H004X0B	V12H004M0A	V12H004M0B
			
SPECIFICATION OF MAIN PARTS	Projection Lens: Type Powered: Zoom / Focus		
F-Number	1.7 - 2.3	1.8 - 2.4	1.8 - 2.4
Focal Length	24.0 - 38.2 mm	55.4 - 83.3 mm	80.6 - 121.1 mm
Zoom Ratio	1 - 1.6	1 - 1.5	1 - 1.5
Weight	1,200g	2,200g	2,200g
Screen Size (Projected Distance)	PU2200 series 50" - 1000" Throw ratio 1.06 - 1.69 PQ series 50" - 1000" Throw ratio 1.02 - 1.64	PU1000 series 50" - 1000" Throw ratio 3.32 - 5.06 PU2000 series 60" - 1000" Throw ratio 2.42 - 3.71 PQ series 60" - 1000" Throw ratio 2.34 - 3.59	PU1000 series 50" - 1000" Throw ratio 4.85 - 7.38 PU2000 series 60" - 1000" Throw ratio 3.54 - 5.41 PQ series 60" - 1000" Throw ratio 3.42 - 5.23
Lens Shift Range	PU2200 series Powered Vertical: ±24% (H Center) Horizontal: ±10% (V Center) PQ series Powered* Vertical: ±25% (H Center) Horizontal: ±8% (V Center)	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center) PQ series Powered Vertical: ±64% (H Center) Horizontal: ±16% (V Center)	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center) PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center) PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)

\*Not supporting power distortion

\*Not supporting power distortion

\*All screen size and throw ratio differ from model to model, please refer to individual product brochure or contact our customer service centre to find out more.  
\*Please refer to the lens compatibility chart on page 9 and 10 for more details

# LENS SPECIFICATIONS

# LENS COMPATIBILITY CHART

## ZOOM LENS

MODEL NUMBER	ELPLM12	ELPLM13	ELPLM14
PRODUCT CODE	V12H004M12	V12H004M13	V12H004M14
			
<b>SPECIFICATION OF MAIN PARTS</b>			
Projection Lens: Type	Powered: Zoom / Focus	Powered: Zoom / Focus	Powered: Zoom / Focus
F-Number	1.9 - 2.1	1.9 - 2.4	2.1 - 2.4
Focal Length	54.7 - 73.0 mm	71.6 - 107.3 mm	106.8 - 160.9 mm
Zoom Ratio	1 - 1.35	1 - 1.52	1 - 1.50
Weight	7,700g	8,000g	8,700g
Screen Size (Projected Distance)	100" - 1000" Throw ratio 1.74 - 2.35	100" - 1000" Throw ratio 2.28 - 3.46	100" - 1000" Throw ratio 3.41 - 5.12
Lens Shift Range	Powered Vertical: ±65% (H Center) Horizontal: ±30% (V Center)	Powered Vertical: ±65% (H Center) Horizontal: ±30% (V Center)	Powered Vertical: ±65% (H Center) Horizontal: ±30% (V Center)

MODEL NUMBER	ELPLM15	MODEL NUMBER	ELPLR05			
PRODUCT CODE	V12H004M0F	PRODUCT CODE	V12H004R05			
						
<b>SPECIFICATION OF MAIN PARTS</b>						
Projection Lens: Type	Powered: Zoom / Focus	Projection Lens: Type	Powered: Focus / Distortion			
F-Number	1.8 - 2.3	F-Number	2.2			
Focal Length	36.0 - 57.4 mm	Focal Length	19.1 mm			
Zoom Ratio	1 - 1.6	Zoom Ratio	N/A			
Weight	1,900g	Weight	9,600g			
Screen Size (Projected Distance)	<table border="0"> <tr> <td>PU1000 series 50" - 1000" Throw ratio 2.16 - 3.48</td> <td>PU2000 series 60" - 1000" Throw ratio 1.57 - 2.56</td> <td>PQ series 60" - 1000" Throw ratio 1.52 - 2.47</td> </tr> </table>	PU1000 series 50" - 1000" Throw ratio 2.16 - 3.48	PU2000 series 60" - 1000" Throw ratio 1.57 - 2.56	PQ series 60" - 1000" Throw ratio 1.52 - 2.47	Screen Size (Projected Distance)	100" - 1000" Throw ratio 0.60
PU1000 series 50" - 1000" Throw ratio 2.16 - 3.48	PU2000 series 60" - 1000" Throw ratio 1.57 - 2.56	PQ series 60" - 1000" Throw ratio 1.52 - 2.47				
Lens Shift Range	<table border="0"> <tr> <td>PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)</td> <td>PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)</td> <td>PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)</td> </tr> </table> <p>*Not supporting power distortion</p>	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)	PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)	PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)	Lens Shift Range	Powered Vertical: ±15% (H Center) Horizontal: ±5% (V Center)
PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)	PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)	PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)				

MODEL NUMBER	ELPLL08	ELPLL09	ELPLL10			
PRODUCT CODE	V12H004L08	V12H004L09	V12H004L10			
						
<b>SPECIFICATION OF MAIN PARTS</b>						
Projection Lens: Type	Powered: Zoom / Focus	Powered: Zoom / Focus	Powered: Zoom / Focus			
F-Number	1.8 - 2.5	2.1 - 2.5	2.2 - 2.6			
Focal Length	119.0 - 165.4 mm	149.7 - 225.0 mm	216.6 - 326.8 mm			
Zoom Ratio	1 - 1.4	1 - 1.50	1 - 1.50			
Weight	2,200g	9,700g	10,900g			
Screen Size (Projected Distance)	<table border="0"> <tr> <td>PU1000 series 50" - 1000" Throw ratio 7.21 - 10.11</td> <td>PU2000 series 60" - 1000" Throw ratio 5.27 - 7.41</td> <td>PQ series 60" - 1000" Throw ratio 5.09 - 7.16</td> </tr> </table>	PU1000 series 50" - 1000" Throw ratio 7.21 - 10.11	PU2000 series 60" - 1000" Throw ratio 5.27 - 7.41	PQ series 60" - 1000" Throw ratio 5.09 - 7.16	Screen Size (Projected Distance)	100" - 1000" Throw ratio 4.79 - 7.20
PU1000 series 50" - 1000" Throw ratio 7.21 - 10.11	PU2000 series 60" - 1000" Throw ratio 5.27 - 7.41	PQ series 60" - 1000" Throw ratio 5.09 - 7.16				
Lens Shift Range	<table border="0"> <tr> <td>PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)</td> <td>PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)</td> <td>PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)</td> </tr> </table> <p>*Not supporting power distortion</p>	PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)	PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)	PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)	Lens Shift Range	Powered Vertical: ±55% (H Center) Horizontal: ±25% (V Center)
PU1000 series Powered Vertical: ±67% (H Center) Horizontal: ±30% (V Center)	PU2000 series Powered Vertical: ±60% (H Center) Horizontal: ±18% (V Center)	PQ series Powered* Vertical: ±64% (H Center) Horizontal: ±16% (V Center)				

\*All screen size and throw ratio differ from model to model, please refer to individual product brochure or contact our customer service centre to find out more.  
\*Please refer to the lens compatibility chart on page 9 and 10 for more details

EB-PU1000 Series & PU2010B									
LENS TYPE	MODEL NUMBER	PRODUCT IMAGE	F NUMBER	THROW RATIO	LENS SHIFT		COMPATIBLE PROJECTORS		
					VERTICAL	HORIZONTAL			
ULTRA SHORT THROW LENS	ELPX01WS/ ELPX01S		1.9	● 0.35	+50% - +67%	±10%	<ul style="list-style-type: none"> <li>EB-PU1006W</li> <li>EB-PU1007W</li> <li>EB-PU1008B</li> </ul>		
	ELPX02S		1.9	● 0.35	+45% - +70%	±15%	<ul style="list-style-type: none"> <li>EB-PU2010B</li> </ul>		
SHORT THROW LENS	ELPLU03S		2.0 - 2.3	●● 0.65 - 0.78 ●● 0.48 - 0.57	±67% ±24%	±30% ±10%	<ul style="list-style-type: none"> <li>EB-PU1006W</li> <li>EB-PU1007W</li> <li>EB-PU1008B</li> </ul>		
	ELPLU04		2.0 - 2.1	●● 0.87 - 1.05 ●● 0.64 - 0.77	±67% ±60%	±30% ±18%	<ul style="list-style-type: none"> <li>EB-PU2010B</li> </ul>		
ZOOM LENS	ELPLW05		2.0 - 2.2	●● 1.04 - 1.46 ●● 0.77 - 1.07	±67% ±24%	±30% ±10%	<ul style="list-style-type: none"> <li>EB-PU1006W</li> <li>EB-PU1007W</li> <li>EB-PU1008B</li> </ul>		
	ELPLW06		1.8 - 2.3	●● 1.62 - 2.22 ●● 1.19 - 1.62	±67% ±60%	±30% ±18%			
	ELPLW08		2.0 - 2.2	●● 1.18 - 1.66 ●● 0.86 - 1.21	±67% ±60%	±30% ±18%			
	ELPLM08		1.7 - 2.3	●● 1.44 - 2.32	±67%	±30%			
	ELPLM10		1.8 - 2.4	●● 3.32 - 5.06 ●● 2.42 - 3.71	±67% ±60%	±30% ±18%			
	ELPLM11		1.8 - 2.4	●● 4.85 - 7.38 ●● 3.54 - 5.41	±67% ±60%	±30% ±18%			
	ELPLM15		1.8 - 2.3	●● 2.16 - 3.48 ●● 1.57 - 2.56	±67% ±60%	±30% ±18%			
	ELPLL08		1.8 - 2.5	●● 7.21 - 10.11 ●● 5.27 - 7.41	±67% ±60%	±30% ±18%			

# LENS COMPATIBILITY CHART

EB-PU2200 Series									
LENS TYPE	MODEL NUMBER	PRODUCT IMAGE	F NUMBER	THROW RATIO		LENS SHIFT		COMPATIBLE PROJECTORS	
				VERTICAL	HORIZONTAL	VERTICAL	HORIZONTAL		
ULTRA SHORT THROW LENS	ELPLX02S		1.9	●0.35			+45% - +70%	±15%	<ul style="list-style-type: none"> <li>• EB-PU2213B</li> <li>• EB-PU2216B</li> <li>• EB-PU2220B</li> </ul>
SHORT THROW LENS	ELPLU03S		2.0 - 2.3	●● 0.48 - 0.57			±24%	±10%	
	ELPLU04		2.0 - 2.1	●● 0.64 - 0.77			±60%	±18%	
ZOOM LENS	ELPLW05		2.0 - 2.2	●● 0.77 - 1.07			±24%	±10%	
	ELPLW06		1.8 - 2.3	●● 1.19 - 1.62			±60%	±18%	
	ELPLW08		2.0 - 2.2	●● 0.86 - 1.21			±60%	±18%	
	ELPLM08		1.7 - 2.3	●● 1.06 - 1.69			±24%	±10%	
	ELPLM10		1.8 - 2.4	●● 2.42 - 3.71			±60%	±18%	
	ELPLM11		1.8 - 2.4	●● 3.54 - 5.41			±60%	±18%	
	ELPLM15		1.8 - 2.3	●● 1.57 - 2.56			±60%	±18%	
	ELPLL08		1.8 - 2.5	5.27 - 7.41 ●●			±60%	±18%	

Note: Powered Distortion is not supported for ELPLW06, LM08, LM15, LM10, LM11 and LL08 lens.



EB-PU2200 Series

# LENS COMPATIBILITY CHART

EB-PQ20/2200 Series									
LENS TYPE	MODEL NUMBER	PRODUCT IMAGE	F NUMBER	THROW RATIO		LENS SHIFT		COMPATIBLE PROJECTORS	
				VERTICAL	HORIZONTAL	VERTICAL	HORIZONTAL		
ULTRA SHORT THROW LENS	ELPLX02S		1.9	●0.34			+45% - +75%	±13%	<ul style="list-style-type: none"> <li>• EB-PQ2008B</li> <li>• EB-PQ2010B</li> <li>• EB-PQ2213B</li> <li>• EB-PQ2216B</li> <li>• EB-PQ2220B</li> </ul>
SHORT THROW LENS	ELPLU03S		2.0 - 2.3	●● 0.46 - 0.56			±25%	±8%	
	ELPLU04		2.0 - 2.1	●● 0.62 - 0.75			±64%	±16%	
ZOOM LENS	ELPLW05		2.0 - 2.2	●● 0.74 - 1.04			±25%	±8%	
	ELPLW06		1.8 - 2.3	●● 1.15 - 1.57			±64%	±16%	
	ELPLW08		2.0 - 2.2	●● 0.83 - 1.17			±64%	±16%	
	ELPLM08		1.7 - 2.3	●● 1.02 - 1.64			±25%	±8%	
	ELPLM10		1.8 - 2.4	●● 2.34 - 3.59			±64%	±16%	
	ELPLM11		1.8 - 2.4	●● 3.42 - 5.23			±64%	±16%	
	ELPLM15		1.8 - 2.3	●● 1.52 - 2.47			±64%	±16%	
	ELPLL08		1.8 - 2.5	5.09 - 7.16 ●●			±64%	±16%	

Note: Powered Distortion is not supported for ELPLW06, LM08, LM15, LM10, LM11 and LL08 lens.



EB-PQ2000/PQ2200 Series

EB-L30000U NL									
LENS TYPE	MODEL NUMBER	PRODUCT IMAGE	F NUMBER	THROW RATIO			LENS SHIFT		COMPATIBLE PROJECTORS
							VERTICAL	HORIZONTAL	
ULTRA SHORT THROW LENS	ELPLX03		2.2	● 0.35			+45% - +70%	±15%	• EB-L30000U NL
SHORT THROW LENS	ELPLU05		2.4 - 2.6	●● 0.90 - 1.09			±55%	±25%	
ZOOM LENS	ELPLW07		2.2 - 2.5	●● 1.29 - 1.76			±65%	±30%	
	ELPLM12		1.9 - 2.1	●● 1.74 - 2.35			±65%	±30%	
	ELPLM13		1.9 - 2.4	●● 2.28 - 3.46			±65%	±30%	
	ELPLM14		2.1 - 2.4	●● 3.41 - 5.12			±65%	±30%	
	ELPLL09		2.1 - 2.5	4.79 - 7.20 ●●			±55%	±25%	
	ELPLL10		2.2 - 2.6	6.96 - 10.45 ●●			±55%	±25%	
	ELPLR05		2.2	● 0.60			±15%	±5%	

# Dazzling Audiences with Vivid Visuals Every Night

Wings of Time Fireworks Symphony @ Mount Faber Leisure, Singapore




Epson's high-resolution projectors play a crucial role in bringing the Wings of Time Fireworks Symphony's nightly spectacle to life.

Ensuring every guest is wowed by a show can be a tall order – but it's the entire business at Wings of Time Fireworks Symphony, an award-winning, multi-sensory night show operated by Mount Faber Leisure Group in Singapore. Taking the audience on a journey through both time and landscapes, Wings of Time weaves together contemporary storytelling, multimedia effects and fireworks to entertain and delight guests.

Occurring twice per night, Wings of Time Fireworks Symphony requires the projected images to fit within a specific backdrop – nine triangular panels – and to blend seamlessly with lasers, water fountains and fireworks. To ensure the show is always a success, the team uses the Epson EB-PU2216B projector, which features 3LCD technology and 4K enhancement to deliver colour uniformity and detailed projection mapping, resulting in vivid, high-resolution imagery at every show.

"Epson's projectors display minute details, provide accurate colour reproduction, and are easy to maintain, contributing to an audience experience that is always captivating and immersive." Said Alex Chee, Deputy Manager, Attractions Operations at Mount Faber Leisure Group.

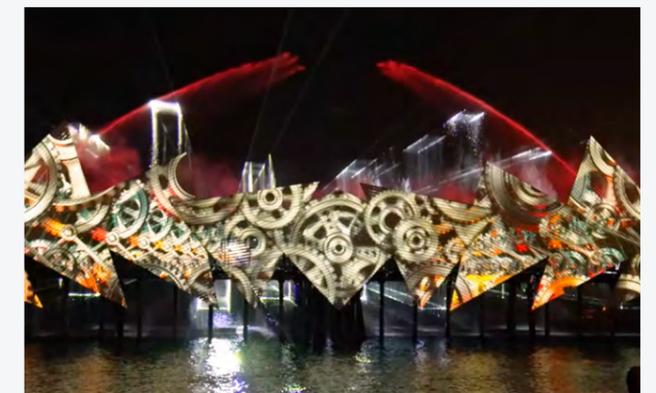

"Epson provides an enhanced visual display that immerses the audience in the storyline and special effects, making the show more engaging and memorable for all guests."

**Alex Chee**  
Deputy Manager,  
Attractions Operations at Mount Faber Leisure Group



EB-L30000U NL

## A Sumptuous Visual Spectacle Brought to Life with Laser Projectors

Matsumoto Castle @ Matsumoto, Japan



Epson's laser projectors enhanced Matsumoto Castle's annual winter event, delivering vibrant colours and intricate details through stunning projection mapping.

A national treasure, Matsumoto Castle is one of the oldest remaining five-storey castles in Japan – but attracting visitors during the winter months was a challenge. To entice people to visit, the tourism board commissioned three breathtaking, nine-minute digital art installations that transformed the castle into visual art for an annual, two-month winter event celebrating Japan's rich history and culture.

In 2023, the team sought to improve the quality of the event and offer a more spectacular experience compared to the previous year. Due to venue restrictions, they also needed compact projectors with a small footprint. Epson's EB-PU2220B high-brightness projectors fit all


of their requirements, offering stunning projection mapping across a wider area of the castle, as well as vivid, stable, and high-resolution imagery.

"Epson's projectors have an extremely high level of brilliance," said Takeaki Higashiyama, the CEO of Hitohata Inc. "I think the most impressive features are the sheer brightness, the vivid colours, and the sharp contrasts."

**"Epson's spectacular projection mapping and support worked exactly as advertised. We've had over 150,000 visitors, a considerably higher number than the prior year. Visitors showed a very high level of satisfaction, and remarked on how the projections were easier to see and understand compared to other years."**

**Yuta Tsujimoto**

Director of the Tourism Promotion Section  
for Matsumoto City Culture and Tourism Department

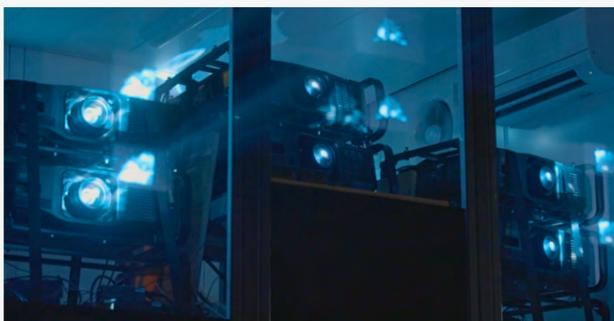

## Elevating Fine-Dining Experiences with Stunning Visual Art in Thailand

Midwinter @ Khao Yai, Thailand



Epson's laser projectors deliver vibrant and captivating projection mapping on architecture at Midwinter restaurant



Nestled in Khao Yai, Thailand, Midwinter is a farm-to-table fine-dining restaurant with standards that extend beyond the food – providing each guest with a captivating experience from the moment they step onto the property. To enhance and elevate this experience, Midwinter commissioned an artist to create a large-scale video to be projected onto the façade of the building. However, the projector they were using had a short service life, and the picture quality failed to meet the team's expectations.

"The equipment we use influences the end result of the artist's work – I wanted the best model available," said Jack Sathaporn Tiyavacharapong, Founder and Managing Director of Midwinter. "The Epson EB-PU2010B laser projector solved all the problems we were facing. We only needed two projectors to map the whole area evenly."

With vibrant and sharp imagery from the laser light source, projection mapping, hassle-free maintenance and lower power consumption, Epson's laser printers help bring Midwinter's artistic vision to life.

**"We are one of very few in Thailand who use 3-D projection mapping on architecture. It makes us stand out from our competitors, and helps us realise our goal of making Midwinter a place where anyone who visits takes home great memories."**

**Jack Sathaporn Tiyavacharapong**

Founder and Managing Director of Midwinter

## SPECIFICATIONS

MODEL NUMBER	EB-PU1006W	EB-PU1007W	EB-PU1008B
SKU Number	V11HA35952	V11HA34952	V11HA33852
Projection Technology	RGB liquid crystal shutter projection system (3LCD)		
<b>Specifications of Main Parts</b>			
LCD	Size: 0.76" (C2 Fine) Resolution: WUXGA (Support 4K Enhancement) Aspect Ratio: 16:10		
Projection Lens	Type: Power Zoom, Power Focus F-Number: 1.7 - 2.3 Focal Length: 24 - 38.2 mm Zoom Ratio: 1.0 - 1.60 Throw Ratio: 1.44 - 2.32 (Wide - Tele) Using Middle Throw Zoom Lens Lens Shift: Vertical: ±67% (Powered) Using Middle Throw Zoom Lens Horizontal: ±30% (Powered) Using Middle Throw Zoom Lens		
Lightsources	Type: Laser Diode Life: 20,000 hours (Normal) / 30,000 hours (Extended)		
<b>Screen Size (Projected Distance)</b>			
Zoom: Wide	50" - 1,000" [1.53 - 31.57 m]		
Zoom: Tele	50" - 1,000" [2.48 - 50.44 m]		
<b>Brightness<sup>1</sup></b>			
White Light Output (Normal / Eco)	6,000 lm / 4,200 lm	7,000 lm / 4,900 lm	8,500 lm / 5,950 lm
Colour Light Output	6,000 lm	7,000 lm	8,500 lm
Light Output (Center) <sup>2</sup>	6,500 lm	7,500 lm	9,200 lm
Contrast Ratio	Over 5,000,000:1		
<b>Geometric Correction</b>			
Projection Orientation	360° Free		
Vertical / Horizontal Keystone	±45° / ±30° with Middle Throw Zoom Lens		
<b>Connectivity</b>			
Analog RGB Input	D-Sub 15Pin	1	
Digital Input	HDMI	1 (HDCP 2.3)	
	DVI-D	1 (HDCP 1.4)	
	HDBaseT	1 (HDCP 2.3)	
USB Input	USB Type A	2 (Port1 for 5V/2A Power Supply, ELPEC01, SMF1, Firmware Update, Copy OSD Settings, Content Playback ; Port2 for 5V/900mA Power Supply, Wireless LAN, Firmware Update, Copy OSD Settings, Content Playback)	
	USB Type B	1 (For Firmware Update, Copy OSD Settings)	
Control I/O	RS-232C	1 (D-Sub 9pin)	
	Remote	1	
Audio Output	Stereo Mini	1	
Network	Wired LAN	RJ45 x 1 (100Mbps)	
	Wireless	Optional (ELPAP11)	
<b>Wireless Specification (Using Optional Wireless LAN)</b>			
Supported Speed for Each mode	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>3</sup> , IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup> Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup>		
Supported Mode	Infrastructure, Access Point (Wi-Fi Direct)		
Supported Security Type	Infrastructure: Open, WPA2 / WPA3-PSK, WPA2 / WPA3-EAP Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK (AES)		
<b>Operating Temperature</b>			
Single Use	Low Altitude (0 - 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> High Altitude (Over 2,286m/7,500ft): 0 - 40 °C <32 - 104 °F> 20% - 80% Humidity, No Condensation Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)		
<b>Operating Altitude</b>			
Direct Power On / Off	Yes		
Start-Up Period	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds		
Quick Start-Up	Less than 7 seconds (Display)		
Cool Down Period	Instant Off		
Air Filter	Type	Electrostatic Filter	
	Maintenance Cycle <sup>4</sup>	20,000 hours (Normal) / 30,000 hours (Extended)	
<b>Power Supply Voltage</b>			
<b>Power Consumption (220 - 240V)</b>			
Laser Diode On	Normal	367 W	431 W
	Extended	310 W	366 W
		535 W	452 W
<b>Standby (Normal / Eco)</b>			
2.0 W / 0.5 W			
<b>Dimension Excluding Feet (D X W X H)</b>			
436 x 545 x 164 mm			
<b>Weight</b>			
Approx. 15.4kg			
<b>Fan Noise (Normal / Medium / Eco)</b>			
30dB / 29dB / 28dB   33dB / 31dB / 29dB   35dB / 34dB / 30dB			

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.  
<sup>2</sup> This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.  
<sup>3</sup> These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.  
<sup>4</sup> When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m<sup>3</sup>). Based on the Epson's in-house test results.

### Supplied Accessories

Power Cable: 3m  
Remote Control: Yes, with Alkaline AA Battery  
Cable cover  
Lens Connector Cap  
User Guide

### Optional Accessories

Air Filter: ELPAP46  
External Air Filter: ELPAP63  
External Camera: ELPEC01  
Wireless LAN unit: ELPAP11  
Ceiling Mount: ELPMB67  
Extension Pole: ELPPFP15\*

\*Can be fitted with ELPMB67 mount for high ceiling applications.

### Optional Lenses

Ultra Short Throw Lens: ELPLX01S or ELPLX01WS (White)  
Short Throw Lens: ELPLU03S / ELPLU04  
Wide Zoom Lens: ELPLW05 / ELPLW06 / ELPLW08  
Middle Throw Zoom lens: ELPLM08 / ELPLM10 / ELPLM11 / ELPLM15  
Long Throw Zoom Lens: ELPLL08

EB-PU1006W/PU1007W/PU1008B



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.


Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
Printed March 2026

## DIMENSIONS

EB-PU1006W / PU1007W / PU1008B

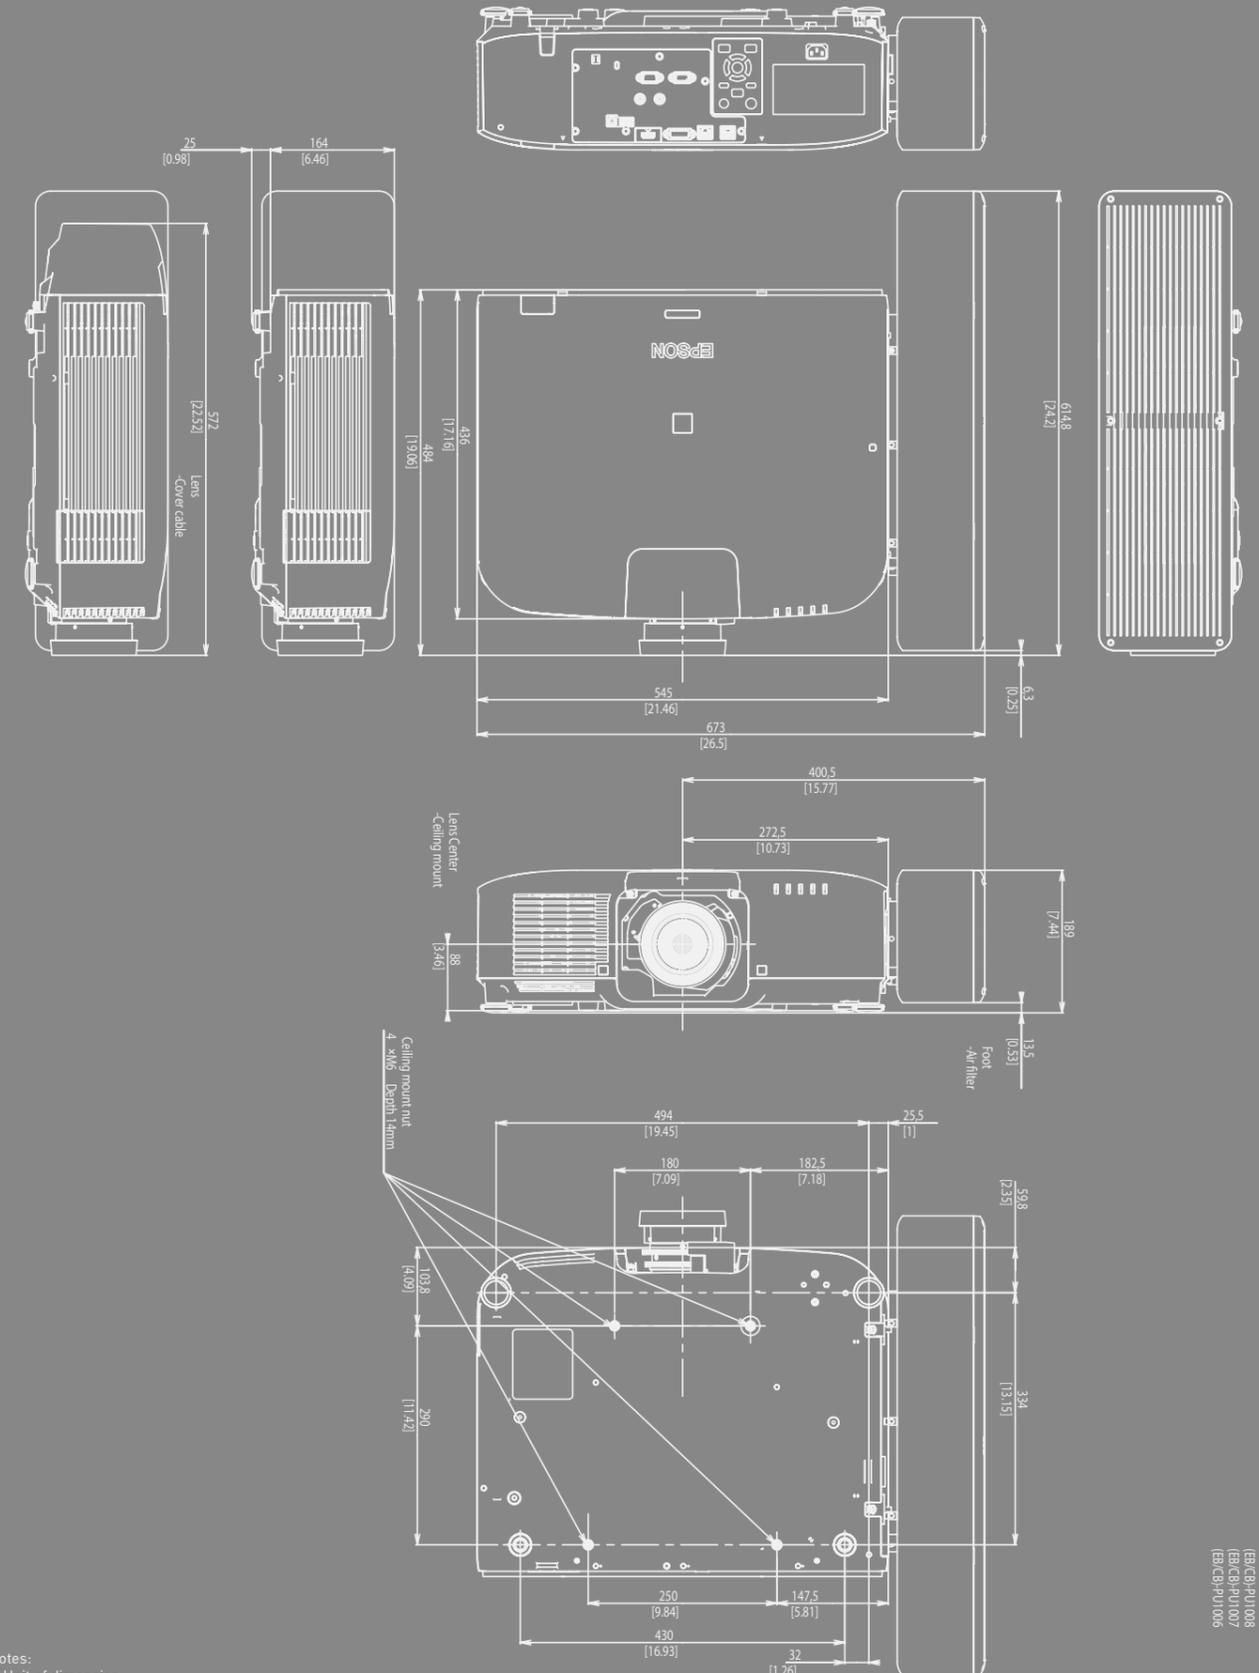

Notes:  
 • Unit of dimension  
 Upper: mm  
 Lower: inch  
 • Lens: ELPLM08

EB-PU1008  
 EB-PU1007  
 EB-PU1006

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)

EpsonSingapore EpsonSingapore EpsonSoutheastAsia Epson Singapore EpsonSingapore

**Epson Singapore Pte Ltd** 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
**Epson Authorised Service Centre** 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

## SPECIFICATIONS

<b>MODEL NUMBER</b>	<b>EB-PU2010B</b>	
<b>SKU Number</b>	V11HA52852	
<b>Projection Technology</b>	RGB liquid crystal shutter projection system (3LCD)	
<b>Specifications of Main Parts</b>		
LCD	Size	1.0" (G2 Fine)
	Resolution	WUXGA (Support 4K Enhancement)
	Aspect Ratio	16:10
	Type	Power Zoom, Power Focus
	F-Number	1.8 - 2.3
Projection Lens	Focal Length	36 - 57.4 mm
	Zoom Ratio	1.0 - 1.60
	Throw Ratio	1.57 - 2.56 (Wide - Tele) Using Middle Throw Zoom Lens
	Vertical	±60% (Powered) Using Middle Throw Zoom Lens
	Horizontal	±18% (Powered) Using Middle Throw Zoom Lens
Lightsource	Type	Laser Diode
	Life	20,000 hours (Normal) / 30,000 hours (Extended)
<b>Screen Size (Projected Distance)</b>		
Zoom: Wide	60" - 1,000" [1.99 - 34.43 m]	
Zoom: Tele	60" - 1,000" [3.26 - 55.63 m]	
<b>Brightness<sup>1</sup></b>		
White Light Output (Normal / Eco)	10,000 lm / 7,000 lm	
Colour Light Output	10,000 lm	
Light Output (Center) <sup>2</sup>	10,300 lm	
<b>Contrast Ratio</b>	Over 5,000,000:1	
<b>Geometric Correction</b>		
Projection Orientation	360° Free	
Vertical / Horizontal Keystone	±45° / ±30° with Middle Throw Zoom Lens	
<b>Connectivity</b>		
Analog RGB Input	D-Sub 15Pin	1
Digital Input	SDI	1 (BNC)
	(SD/HD/3G-SDI)	
	HDMI	1 (HDCP 2.3)
USB Input	DVI-D	1 (HDCP 1.4)
	HDBaseT	1 (HDCP 2.3)
	USB Type A	2 (Port1 for 5V/2A Power Supply, ELPEC01, SMF1, Firmware Update, Copy OSD Settings, Content Playback; Port2 for 5V/900mA Power Supply, Wireless LAN, Firmware Update, Copy OSD Settings, Content Playback)
Control I/O	USB Type B	1 (For Firmware Update, Copy OSD Settings)
	RS-232C	1 (D-Sub 9pin)
Digital Output	Remote	Stereo Mini x 1
	SDI	1 (BNC)
Audio Output	(SD/HD/3G-SDI)	
	Stereo Mini	1
Network	Wired LAN	RJ45 x 1 (100Mbps)
	Wireless	Optional (ELPAP11)
<b>Wireless Specification (Optional Wireless LAN)</b>		
Supported Speed for Each mode	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>3</sup> , IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup> Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup>	
Supported Mode	Infrastructure, Access Point (Wi-Fi Direct)	
Supported Security Type	Infrastructure: Open, WPA2 / WPA3-PSK, WPA2 / WPA3-EAP Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK (AES)	
<b>Operating Temperature</b>		
Single Use	Low Altitude (0 - 2,286m/7,500ft): 0 - 50 °C <32 - 122 °F> High Altitude (Over 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> 20% - 80% Humidity, No Condensation Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 - 10,000ft)	
<b>Operating Altitude</b>		
<b>Direct Power On / Off</b>	Yes	
<b>Start-Up Period</b>	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds	
<b>Quick Start-Up</b>	Less than 7 seconds (Display)	
<b>Cool Down Period</b>	Instant Off	
<b>Air Filter</b>	Type	Electrostatic Filter
	Maintenance Cycle <sup>4</sup>	20,000 hours (Normal) / 30,000 hours (Extended)
<b>Power Supply Voltage</b>	100 - 240 V AC ±10%, 50/60 Hz	
<b>Power Consumption (220 - 240V)</b>		
Laser Diode On	Normal	535 W
	Extended	452 W
Standby (Normal / Eco)	2.0 W / 0.5 W	
<b>Dimension Excluding Feet (D X W X H)</b>	436 x 545 x 164 mm	
<b>Weight</b>	Approx. 16.8kg	
<b>Fan Noise (Normal / Medium / Eco)</b>	37dB / 34dB / 30dB	

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.  
<sup>2</sup> This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.  
<sup>3</sup> These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.  
<sup>4</sup> When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m<sup>3</sup>). Based on the Epson's in-house test results.

### Supplied Accessories

Power Cable: 3m  
 Remote Control: Yes, with Alkaline AA Battery  
 Cable cover  
 Lens Connector Cap  
 User Guide

### Optional Accessories

Air Filter: ELPAF46  
 External Air Filter: ELPAP63  
 External Camera: ELPEC01  
 Wireless LAN unit: ELPAP11  
 Ceiling Mount: ELPMB67  
 Extension Pole: ELPPF15\*

\*Can be fitted with ELPMB67 mount for high ceiling applications.

### Optional Lenses


Ultra Short Throw Lens: ELPLX02S  
 Short Throw Lens: ELPLU03S / ELPLU04  
 Wide Zoom Lens: ELPLW05 / ELPLW06 / ELPLW08  
 Middle Throw Zoom Lens: ELPLM10 / ELPLM11 / ELPLM15  
 Long Throw Zoom Lens: ELPLL08

EB-PU2010B



## DIMENSIONS

EB-PU2010B

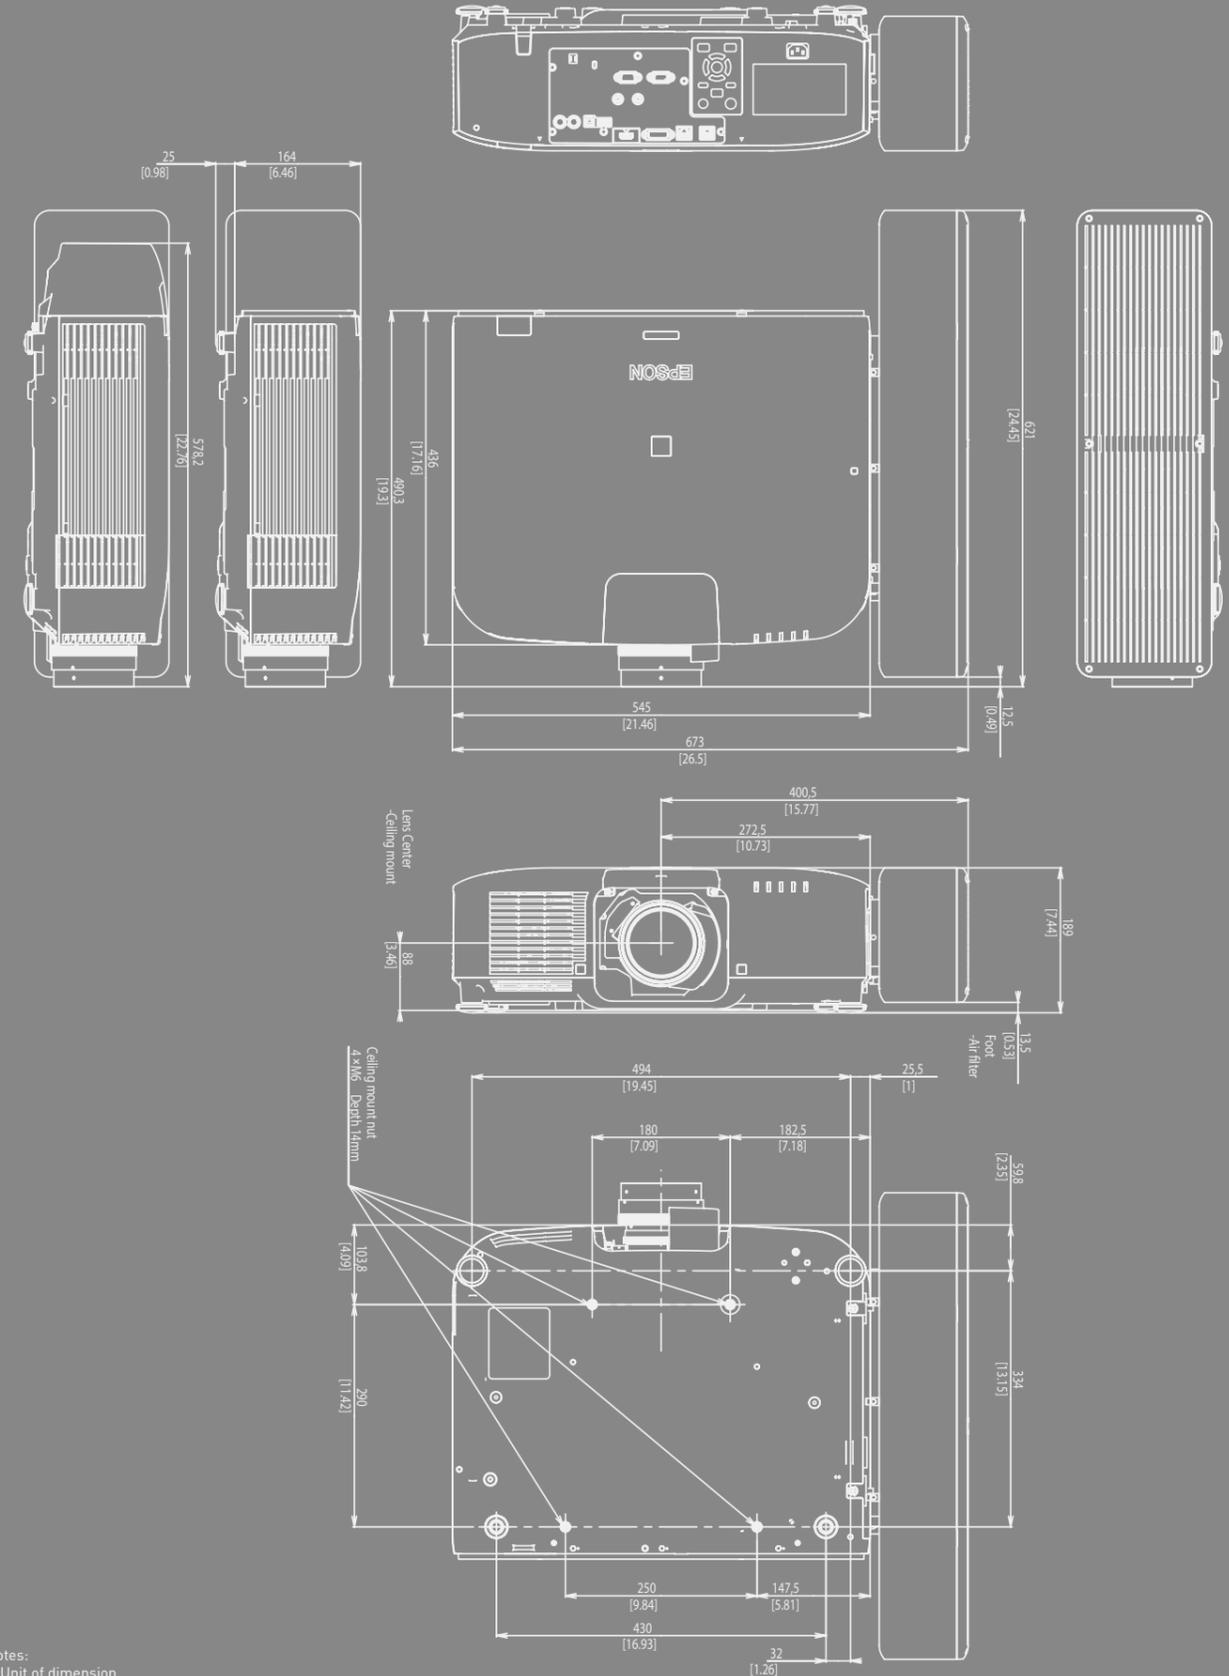

©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
 Printed March 2026

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)

EpsonSingapore EpsonSingapore EpsonSoutheastAsia EpsonSingapore EpsonSingapore

**Epson Singapore Pte Ltd** 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
**Epson Authorised Service Centre** 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

Notes:  
 • Unit of dimension  
 Upper: mm  
 Lower: inch  
 • Lens: ELPLM15

## SPECIFICATIONS

MODEL NUMBER	EB-PU2213B	EB-PU2216B	EB-PU2220B
SKU Number	V11HA68852	V11HA67852	V11HA66852
Projection Technology	RGB liquid crystal shutter projection system (3LCD)		
<b>Specifications of Main Parts</b>			
LCD	Size	1.03" (C2 Fine)	
	Native Resolution	WUXGA (Support 4k Enhancement)	
Lightsource	Refresh Rate	192 - 240 Hz	
	Type	Laser Diode	
	Life	20,000 hours (Normal) / 30,000 hours (Extended)	
Projection Lens	Type	Power Zoom / Power Focus	
	F-Number	1.8 - 2.3	
	Focal Length	36.0 - 57.40 mm	
	Zoom Ratio	1 - 1.6	
	Throw Ratio	1.57 - 2.56 (Wide to Tele) Using Middle Throw Zoom Lens	
	Lens Exchange	Yes	
	Lens Shift	Vertical: ±60% (Powered) Using Middle Throw Zoom Lens Horizontal: ±18% (Powered) Using Middle Throw Zoom Lens	
	<b>Screen Size (Projected Distance)</b>		
Zoom: Wide	60" - 1,000" [1.99 - 34.43 m]		
Zoom: Tele	60" - 1,000" [3.26 - 55.63 m]		
<b>Brightness<sup>1</sup></b>			
White Light Output (Normal / Eco)	13,000 lm / 9,100 lm	16,000 lm / 11,200 lm	20,000 lm / 14,000 lm
Colour Light Output	13,000 lm	16,000 lm	20,000 lm
Light Output (Center) <sup>2</sup>	13,700 lm	16,900 lm	21,100 lm
Contrast Ratio	Over 5,000,000:1		
<b>Geometric Correction</b>			
Vertical / Horizontal Keystone	±45° / ±30° (Zoom: Tele) with Middle Throw Zoom Lens		
Quick Corner	Yes		
Curve Surface	Yes		
Point Correction	Yes		
Corner Wall	Yes		
Geometry Correction Memory	Yes		
<b>Connectivity</b>			
Analog Input	D-Sub 15Pin	1 (Blue)	
Digital Input	DVI-D	1 (HDCP 1.4)	
	HDMI	1 (HDCP 2.3)	
	BNC (SD/HD/3G-SD)	1	
	HDBaseT (RX)	1 (HDCP 2.3)	
Output Terminal	BNC (SD/HD/3G-SD)	1	
Audio Output	Stereo Mini Jack	1	
Others	USB Type A	2 (For ELPEC01, SMF1, Firmware Update, Copy OSD settings or 5V/2A Power Supply, Content Playback)	
	USB Type B	1 (For Firmware Update, Copy OSD Settings)	
Control I/O	RS-232C	1 (D-Sub 9pin)	
	Remote	1 (Stereo Mini)	
Network	Wired LAN	RJ45 x 1	
	Wireless	Optional (ELPAP11)	
<b>Wireless Specification (Optional Wireless LAN)</b>			
Supported Speed For Each Mode	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>3</sup> / IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> / IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> / IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> / IEEE 802.11n (5GHz): 150.0 Mbps <sup>3</sup> Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> / IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> / IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> / IEEE 802.11n (5GHz): 150.0 Mbps <sup>3</sup>		
Wireless LAN Security	Infrastructure: OPEN, WPA2/WPA3-PSK, WPA2/WPA3-EAP Supported EAP type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK(AES)		
<b>Operating Temperature</b>			
Single Use	Low Altitude (0 - 2,286m/7,500ft): 0 - 50 °C <32 - 122 °F> High Altitude (Over 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> 20% - 80% Humidity, No Condensation		
<b>Operating Altitude</b>			
Direct Power On / Off	0 - 3,048 m (0 - 10,000 ft) (over 1,500m / 4,921ft with high altitude mode)		
Start-Up Period	Less than 8 seconds (Epson Logo); Warm-up Period: 20 seconds		
Quick Start-Up	Less than 7 seconds (Display)		
Cool Down Period	Instant Off		
Power Supply Voltage	100 - 240 V AC ±10%, 50/60 Hz		
<b>Power Consumption (220 - 240V)</b>			
Laser Diode (Normal / Extended)	864W / 633W	1083W / 773W	1301W / 899W
Standby (Network / Energy Saving)	2.0W / 0.4W		
Dimension Excluding Feet (D X W X H)	492 x 586 x 185 mm		
Weight	Approx. 23.7kg	Approx. 24.2kg	Approx. 24.4kg
Fan Noise (Normal / Quiet)	34dB / 29dB	38dB / 34dB	45dB / 37dB

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118.

<sup>2</sup> This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

<sup>3</sup> Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

### Supplied Accessories

Power Cable: 3m  
Remote Control with 2 x AA Battery  
Cable Cover  
User's Manual

### Optional Accessories

External Camera: ELPEC01  
Remote Control Cable Set (10m x 2): ELPKC28  
Wireless LAN Unit: ELPAP11  
Ceiling Mount: ELPMB67 / ELPMB47 / ELPMB48

### Optional Lenses

Ultra Short Throw Lens: ELPLX02S  
Short Throw Lens: ELPLU03S / ELPLU04  
Wide Throw Lens: ELPLW06 / ELPLW08 / ELPLW05  
Middle Throw Zoom Lens: ELPLM10 / ELPLM11 / ELPLM15 / ELPLM08  
Long Throw Lens: ELPLL08

EB-PU2213B / EB-PU2216B / EB-PU2220B



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.


Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
Printed March 2026

## DIMENSIONS

### EB-PU2200 SERIES

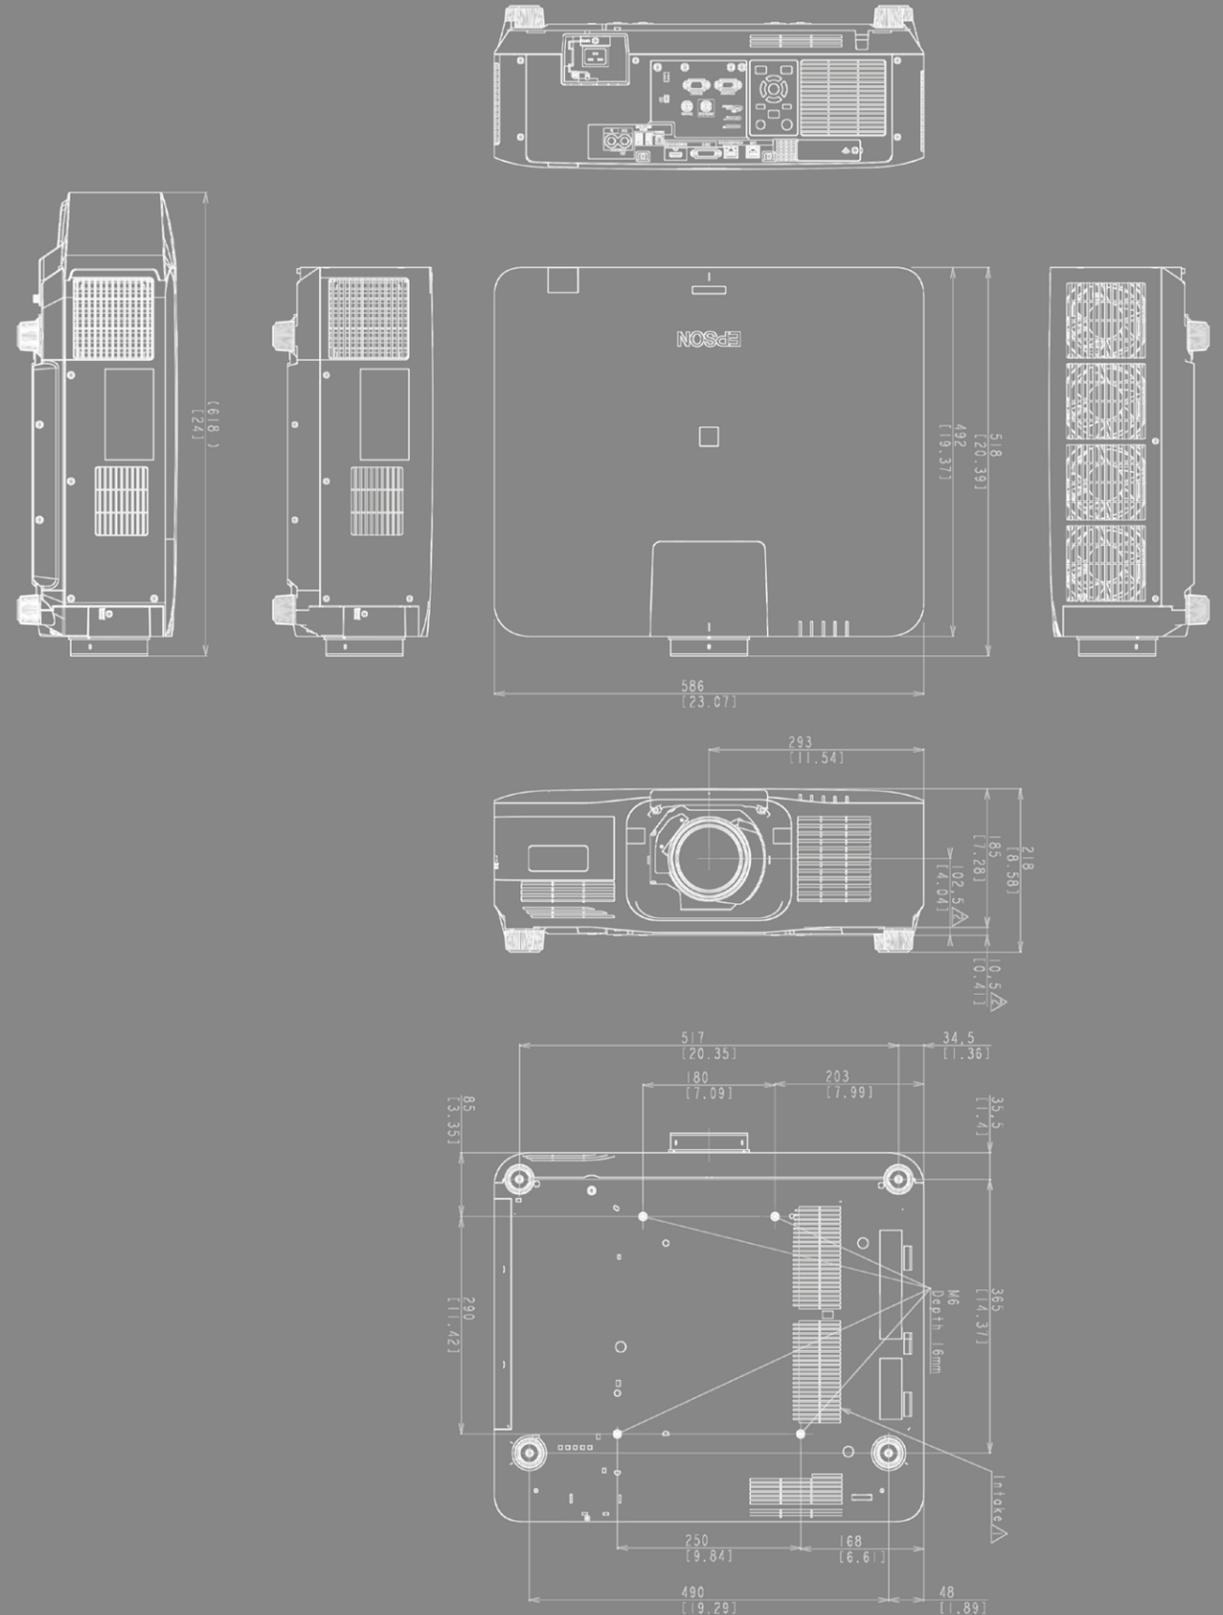

- Notes:
- Unit of dimension  
Upper: mm  
Lower: inch
  - Lens: ELPLM15

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)

EpsonSingapore EpsonSingapore EpsonSoutheastAsia Epson Singapore EpsonSingapore

**Epson Singapore Pte Ltd** 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
**Epson Authorised Service Centre** 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

## SPECIFICATIONS

MODEL NUMBER	EB-PQ2008B		EB-PQ2010B	
SKU Number	V11HB01852		V11HB02852	
Projection Technology	RGB liquid crystal shutter projection system (3LCD)			
<b>Specifications of Main Parts</b>				
LCD	Size	1.04" wide panel with DMLA (C2 Fine, 12 bit, OD)		
	Native Resolution	1080p with 4K Crystal Motion (1920 x1080 x 4)		
	Resolution On Screen	4K UHD (3840 x2160)		
	Aspect Ratio	16:9		
	Type	Power Zoom, Power Focus		
Projection Lens	F-Number	1.8 – 2.3		
	Focal Length	36.0– 57.3 mm		
	Zoom Ratio	1.0 - 1.61		
	Throw Ratio	1.52 – 2.47 Using Middle Throw Zoom Lens		
	Lens Shift	Vertical: ±64% (Powered) Using Middle Throw Zoom Lens Horizontal: ±16% (Powered) Using Middle Throw Zoom Lens		
Lightsource	Type	Laser Diode		
	Life (Normal / Extended)	20,000 hours / 30,000 hours		
<b>Screen Size (Projected Distance)</b>				
Zoom: Wide	60" – 1,000" [1.98 – 34.19 m]			
Zoom: Tele	60" – 1,000" [3.24 – 55.28 m]			
<b>Brightness<sup>1</sup></b>				
White Light Output (Normal / Eco)	8,000 lm / 5,600 lm	10,000 lm / 7,000 lm		
Colour Light Output	8,000 lm	10,000 lm		
Light Output (Center) <sup>2</sup>	8,400 lm	10,600 lm		
Contrast Ratio	Over 5,000,000:1			
<b>Geometric Correction</b>				
Projection Orientation	360° Free			
Vertical / Horizontal Keystone	±45° / ±30° with Middle Throw Zoom Lens			
<b>Connectivity</b>				
Digital Input	SDI (SD/HD/3G-SDI)	N/A		1 (BNC)
	HDMI	2 (HDCP 2.3)		
	HDBaseT	1 (HDCP 2.3)		
USB Input	USB Type A	2 (Port 1: For wireless LAN, SMF1, Firmware update, Copy OSD Setting, 5V/900mA Power supply / Content Playback; Port2: For ELPEC01, SMF1, Firmware update, Copy OSD Setting, 5V/900mA Power supply / Content Playback)		
	USB Type B	1 (For Firmware Update, Copy OSD Settings)		
Control I/O	RS-232C	1 (D-Sub 9pin)		
	Remote	Stereo Mini x 1		
Digital Output	SDI (SD/HD/3G/12G-SDI)	N/A		1 (BNC)
	HDMI Out	1 (HDCP2.3)		
Audio Output	Stereo Mini	1		
Network	Wired LAN	RJ45 x 1 (100Mbps)		
	Wireless LAN	Optional (ELPAP11)		
<b>Wireless Specification (Optional Wireless LAN)</b>				
Supported Speed for Each mode	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>3</sup> , IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup> Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup>			
Supported Mode	Infrastructure, Access Point (Wi-Fi Direct)			
Supported Security Type	Infrastructure: Open, WPA2 / WPA3-PSK, WPA2 / WPA3-EAP Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK (AES)			
<b>Operating Temperature</b>				
Single Use	Low Altitude (0 - 2,286m/7,500ft): 0 - 50 °C <32 - 122 °F> High Altitude (Over 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> 20% - 80% Humidity, No Condensation			
Operating Altitude	Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)			
Direct Power On / Off	Yes			
Start-Up Period	Less than 9 seconds (Epson Logo); Warm-up Period: 20 seconds			
Quick Start-Up	Less than 9 seconds (Display)			
Cool Down Period	Instant Off			
Air Filter	Type	Electrostatic Filter		
	Maintenance Cycle <sup>4</sup>	20,000 hours (Normal) / 30,000 hours (Extended)		
Power Supply Voltage	100 - 240 V AC ±10%, 50/60 Hz			
Power Consumption (220 - 240V)	Laser Diode On	Normal	502 W	613 W
		Extended	410 W	483 W
Standby (Normal / Eco)	2.0 W / 0.5 W			
Dimension Excluding Feet (W x D x H)	545 x 436 x 164 mm			
Weight	Approx. 18.6kg		Approx. 18.8kg	
Fan Noise (Normal / Eco)	35dB / 29dB		39dB / 29dB	

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

<sup>2</sup> This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

<sup>3</sup> These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.

<sup>4</sup> When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m<sup>3</sup>). Based on the Epson's in-house test results.

### Supplied Accessories

Power Cable: 3m, 3 wire  
Remote Control: Yes, with Alkaline AA Battery  
Cable cover  
User Guide

### Optional Accessories

Air Filter: ELPAF46  
External Air filter: ELPAF63  
External Camera: ELPEC01  
Wireless LAN unit: ELPAP11  
Ceiling Mount: ELPMB67, ELPMB47, ELPMB48  
Suspension Adapter: ELPPF15

### Optional Lenses

Ultra Short Throw Lens:  
ELPLX02S  
Zoom Lens:  
ELPLU03S, ELPLU04, ELPLW05,  
ELPLW06, ELPLW08, ELPLM08, ELPLM10,  
ELPLM11, ELPLM15, ELPLL08

EB-PQ2008B



EB-PQ2010B



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.


Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
Printed March 2026

## DIMENSIONS

EB-PQ2008B / PQ2010B

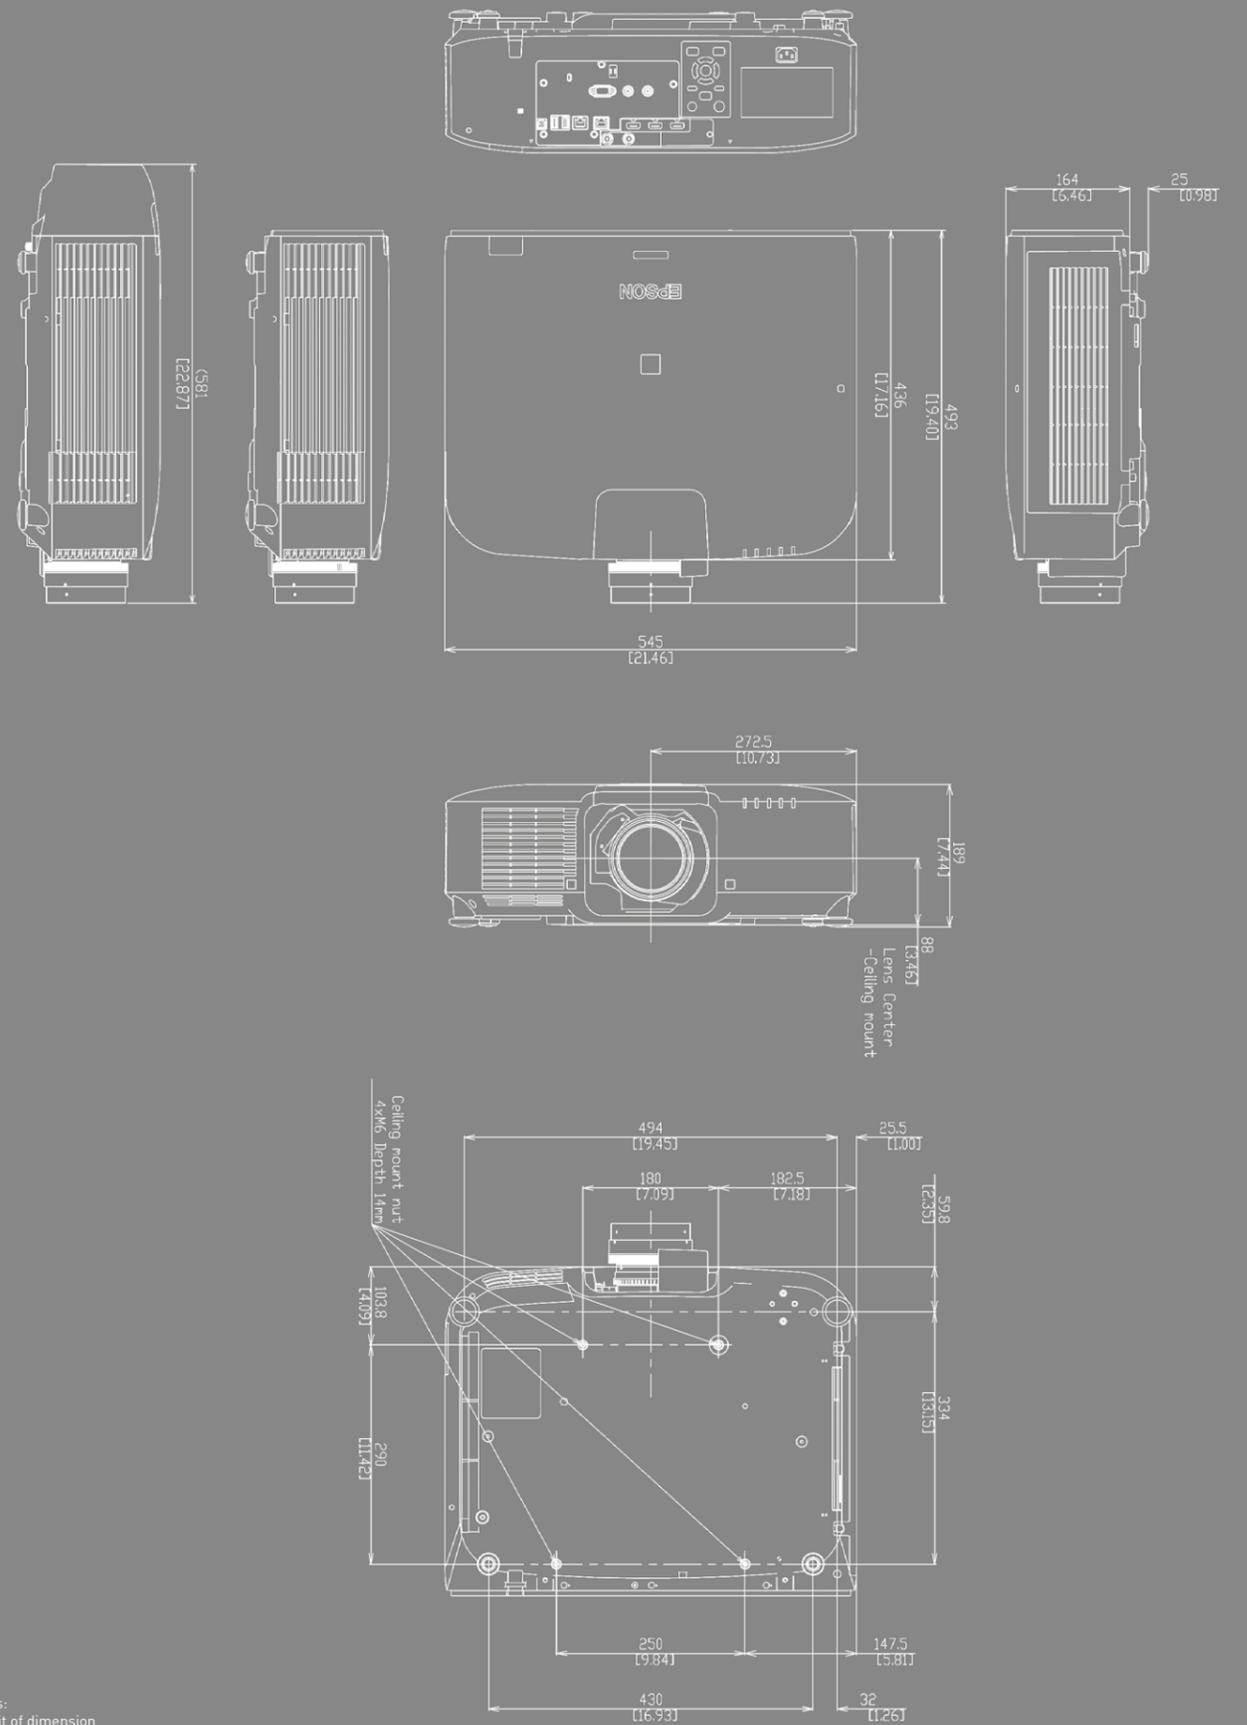

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)

[EpsonSingapore](#) [EpsonSingapore](#) [EpsonSoutheastAsia](#) [Epson Singapore](#) [EpsonSingapore](#)

**Epson Singapore Pte Ltd** 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
**Epson Authorised Service Centre** 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

## SPECIFICATIONS

MODEL NUMBER	EB-PQ2213B	EB-PQ2216B	EB-PQ2220B	
SKU Number	V11HB03852	V11HB04852	V11HB05852	
Projection Technology	RGB liquid crystal shutter projection system (3LCD)			
<b>Specifications of Main Parts</b>				
LCD	Size	1.04" wide panel with DMLA (C2 Fine, 12 bit, OD)		
	Native Resolution	1080p with 4K Crystal Motion (1920 x1080 x 4)		
	Resolution On Screen	4K UHD (3840 x2160)		
	Aspect Ratio	16:9		
	Projection Lens	Type	Power Zoom, Power Focus	
		F-Number	1.8 - 2.3	
Focal Length		36.0 - 57.3 mm		
Zoom Ratio		1.0 - 1.61		
Throw Ratio		1.52 - 2.47 Using Middle Throw Zoom Lens		
Vertical: ±64% (Powered) Using Middle Throw Zoom Lens				
Horizontal: ±16% (Powered) Using Middle Throw Zoom Lens				
Lightsource	Type	Laser Diode		
	Life (Normal / Extended)	20,000 hours / 30,000 hours		
<b>Screen Size (Projected Distance)</b>				
Zoom: Wide	60" - 1,000" [1.98 - 34.19 m]			
Zoom: Tele	60" - 1,000" [3.24 - 55.28 m]			
<b>Brightness<sup>1</sup></b>				
White Light Output (Normal / Eco)	13,000 lm / 9,100 lm	16,000 lm / 11,200 lm	20,000 lm / 14,000 lm	
Colour Light Output	13,000 lm	16,000 lm	20,000 lm	
Light Output (Center) <sup>2</sup>	13,800 lm	17,000 lm	21,300 lm	
<b>Contrast Ratio</b>				
Over 5,000,000:1				
<b>Geometric Correction</b>				
Projection Orientation	360° Free			
Vertical / Horizontal Keystone	±45° / ±30° with Middle Throw Zoom Lens			
<b>Connectivity</b>				
Digital Input	SDI (SD/HD/3G/12G-SDI)	1 (BNC)		
	HDMI	2 (HDCP 2.3)		
	HDBaseT	1 (HDCP 2.3)		
USB Input	USB Type A	2 (Port 1: For wireless LAN, SMF1, Firmware update, Copy OSD Setting, 5V/900mA Power supply / Content Playback; Port2: For ELPEC01, SMF1, Firmware update, Copy OSD Setting, 5V/900mA Power supply / Content Playback)		
	USB Type B	1 (For Firmware Update, Copy OSD Settings)		
Control I/O	RS-232C	1 (D-Sub 9pin)		
	Remote	Stereo Mini x 1		
Digital Output	SDI (SD/HD/3G/12G-SDI)	1 (BNC)		
	HDMI Out	1 (HDCP2.3)		
Audio Output	Stereo Mini	1		
Network	Wired LAN	RJ45 x 1 (100Mbps)		
	Wireless LAN	Optional (ELPAP11)		
<b>Wireless Specification (Optional Wireless LAN)</b>				
Supported Speed for Each mode	Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>3</sup> , IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup> Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>3</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>3</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>3</sup>			
Supported Mode	Infrastructure, Access Point (Wi-Fi Direct)			
Supported Security Type	Infrastructure: Open, WPA2 / WPA3-PSK, WPA2 / WPA3-EAP Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast Access Point (Wi-Fi Direct): WPA2-PSK (AES)			
<b>Operating Temperature</b>				
Single Use	Low Altitude (0 - 2,286m/7,500ft): 0 - 50 °C <32 - 122 °F> High Altitude (Over 2,286m/7,500ft): 0 - 45 °C <32 - 113 °F> 20% - 80% Humidity, No Condensation			
<b>Operating Altitude</b>				
Direct Power On / Off	Yes			
Start-Up Period	Less than 9 seconds (Epson Logo); Warm-up Period: 20 seconds			
Quick Start-Up	Less than 9 seconds (Display)			
Cool Down Period	Instant Off			
Power Supply Voltage	100 - 240 V AC ±10%, 50/60 Hz			
<b>Power Consumption (220 - 240V)</b>				
Laser Diode On	Normal	925 W	1,114 W	1,431 W
	Extended	666 W	784 W	975 W
Standby (Normal / Eco)	2.0 W / 0.5 W			
Dimension Excluding Feet (W x D x H)	586 x 492 x 185 mm			
Weight	Approx. 28.8kg		Approx. 29.2kg	
Fan Noise (Normal / Eco)	37dB / 34dB (36dB when ELPLX02 lens is used)		44dB / 36dB	

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

<sup>2</sup> This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

<sup>3</sup> These modes and actual data throughputs depend on supported wireless mode of source devices and/or environment conditions.

### Supplied Accessories

Power Cable: 3m, 3 wire  
Remote Control: Yes, with Alkaline AA Battery  
Cable cover  
User Guide

### Optional Accessories

External Camera: ELPEC01  
Wireless LAN unit: ELPAP11  
Ceiling Mount: ELPMB67, ELPMB47, ELPMB48  
Suspension Adapter: ELPPF15

### Optional Lenses

Ultra Short Throw Lens:  
ELPLX02S  
Zoom Lens:  
ELPLU03S, ELPLU04, ELPLW05,  
ELPLW06, ELPLW08, ELPLM08, ELPLM10,  
ELPLM11, ELPLM15, ELPLL08

EB-PQ2213B / EB-PQ2216B / EB-PQ2220B



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.


Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
Printed March 2026

## DIMENSIONS

EB-PQ2213B / PQ2216B / PQ2220B

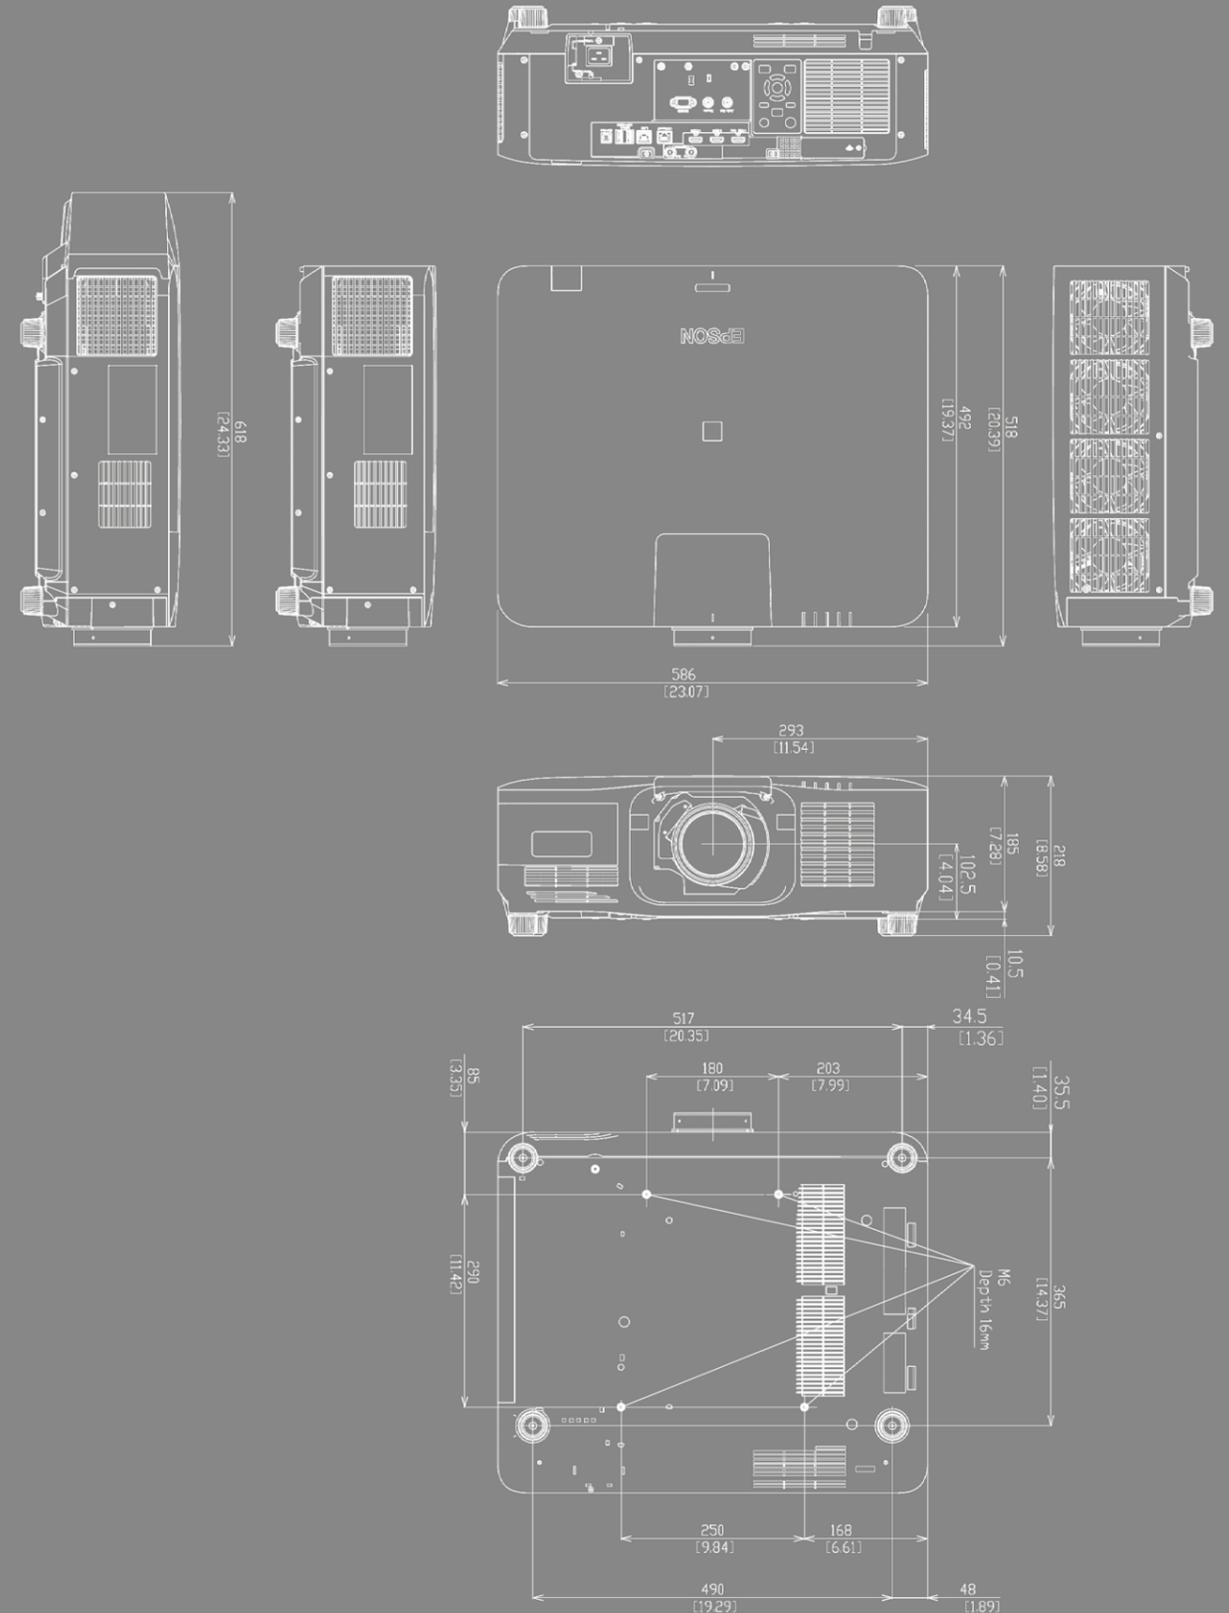

Notes:

- Unit of dimension
- Upper: mm
- Lower: inch
- Lens: ELPLM15

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)

EpsonSingapore EpsonSingapore EpsonSoutheastAsia Epson Singapore EpsonSingapore

**Epson Singapore Pte Ltd** 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
**Epson Authorised Service Centre** 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.





# Efforts to mitigate environmental impacts in manufacturing



Toyoshina plant in Japan

## Epson becomes the First<sup>1</sup> in the Manufacturing Industry to switch all global sites<sup>2</sup> to 100% Renewable Energy.

In December 2023, Epson successfully transitioned all its sites<sup>2</sup> to 100% renewable energy. This includes the adoption of Shinshu Green Electricity, a CO<sub>2</sub>-free value-added electric power generated locally in Nagano Prefecture using hydroelectric power sources. This strategic shift not only contributes to the reduction of Epson's greenhouse gas emissions<sup>3</sup> but also boosts the utilisation of locally produced energy.

## Assembled using 100% renewable electricity

Epson's worldwide group sites<sup>2</sup> met their electricity needs from 100% renewable energy sources (renewable electricity) in 2023. We first achieved 100% renewable energy at our projector's manufacturing site in the Philippines in January 2021 by generating power with a rooftop mega-solar power plant and switching to a mix of geothermal and hydroelectric power.



Epson Precision (Philippines), Inc.



## Over 80% recycled cardboard packaging

All carton box packaging of Epson's projectors are made by over 80% recycled cardboard.

<sup>1</sup> Among Japanese companies that have joined the RE100. Current as of January 9, 2024, per Epson research.

<sup>2</sup> Excludes some sales sites and leased properties where the amount of electricity consumed cannot be determined

<sup>3</sup> GHG (Greenhouse Gas), GHG scope 1, 2, 3 emission

Find out more at [www.epson.com.sg/projectors](http://www.epson.com.sg/projectors)



EpsonSingapore



EpsonSingapore



EpsonSoutheastAsia



Epson Singapore



EpsonSingapore

Epson Singapore Pte Ltd  
Epson Authorised Service Centre

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500

6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

Information correct at time of printing. Printed March 2026