



SEE ULTRA


EXPERIENCE ULTRA.
GO BEYOND THE TV.



Big screen entertainment with vibrant 3LCD colour technology.

Go beyond the TV experience with bigger movie nights, gaming, streaming, and screen sharing. Choose from home cinema projectors to ultra short throw laser projectors or pick a flexible and portable projector and turn any space into a visual party.


ENGINEERED FOR good



*For selected models only.




Your Gateway to Exceptional Viewing




Flexible Screen Size



High Contrast Ratio*




Laser Light Source*




Lens Shift*



High Dynamic Range (HDR)*




Inbuilt Smart Streaming Function*



Built-in Speaker*



Horizontal Keystone Adjuster*




Fuss-Free Set-Up*



Smart Wireless Connectivity*

High definition Stunning image quality

It is no longer impossible to recreate that cinematic adventure in your own home with Epson's range of home projectors. Enjoy a truly captivating, detail-packed experience right from the comfort of your couch.

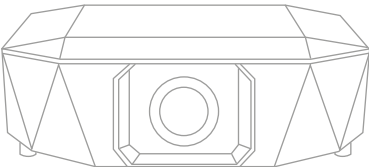


Plug-and-play Fuss-free set up

All you need is to plug in the power and your entertainment begins. Home entertainment is made more accessible and fuss-free with Epson's home projectors, which come ready with smart streaming functions*.



Truly flexible Project anywhere

Epson's sleek and compact projectors fit seamlessly into your room's decor. With adjustable screen sizes and keystone correction, you can place them anywhere for a crisp, vivid projection.



*Applies to selected models only.

*For selected models only.

LIFESTUDIO

CREATE THE MOMENT

Designed to fit your life and style, Lifestudio Pop and Lifestudio Flex projectors combine portability, vibrant colours, and minimalist design — so every room and moment feels uniquely yours.



Experience the Life You Imagine

Lifestudio projectors by Epson combine sleek design with smart performance. Powered by the Epson Triple Core Engine with 3LCD technology, they deliver vibrant, true-to-life visuals. With built-in Bose speakers, auto focus, and Google TV™, they make immersive entertainment effortless — wherever life takes you.

LIFESTUDIO POP



EF-61G
Ice Green

LIFESTUDIO POP Plus



EF-62N
Metallic Navy

LIFESTUDIO FLEX



EF-71
Warm White

LIFESTUDIO FLEX Plus



EF-72
Oak

Full Immersion that Moves You

Enjoy bright, vivid images with Epson's 3LCD laser technology and up to 1,000 lumens* of equal white and colour light output – delivering natural, distraction-free visuals that bring every moment to life, along with a suite of smart features designed for convenience, versatility, and seamless performance.



Image up to 150"



Portable



high quality image with HDR10



Automatic image adjustments



105° tilting
180° rotation*




Epson Projection Studio App

*For selected models only. Note: Features varies with models.

Our Next Generation of
Projection Technology

Epson 3LCD Triple Core Engine technology uses dedicated Red, Green, and Blue LEDs to directly power our advanced 3LCD projector engine – delivering vibrant colour and exceptional brightness in a sleek, energy-efficient design.

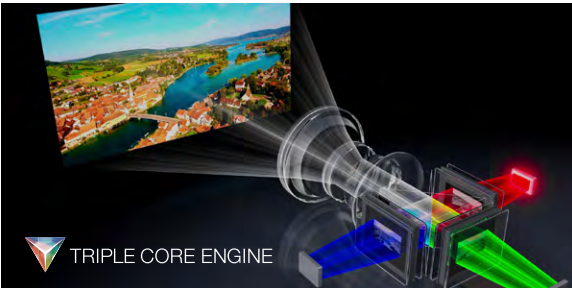

Sound that moves you
Built-in Bose speaker

Lifestudio projectors feature Sound by Bose speakers, delivering rich, immersive audio that brings every scene to life.



Exclusive Features for EF-72



Portable Power
via USB-C

Powered via USB-C with support for 100W or 140W USB PD batteries.



Ambient
Lighting

Built-in ambient lighting lets you create the perfect atmosphere – even when you're not watching.

Instant Setup
Plug & Play

Just plug it in and start watching. With smart Auto Image Adjustment correction handling the setup, you get perfect picture alignment without any hassle — no manual adjustments needed. Effortless entertainment, right out of the box.



Real-Time Auto Keystone Correction
Automatically adjusts the screen in just one second for perfect alignment – instantly.



Auto Obstacle Avoidance
Detects and avoids objects in the projection path, ensuring an uninterrupted view.



Smart Eye Protection
Automatically pauses the video to prevent glare from reaching your eyes.



Screen Fit
Automatically resizes the image to perfectly fit the screen frame.



Wall Colour Adjustment
Detects wall colour and fine-tunes the projection to preserve true-to-life colours.

Vibrant, Dynamic and High-Performing.

CREATE YOUR ANYWHERE MOMENT

EF-61G



SOUND BY
BOSE

LIFESTUDIO POP

RESOLUTION **Full HD 1080p** | SUPPORT BLUETOOTH AUDIO | COMPACT SIZE **1.6kg**
UP TO **150"** | **700** | **AUTO IMAGE** | **5W+5W**
SCREEN SIZE | LUMENS | ADJUSTMENT | 2-WAY WITH DUAL PASSIVE RADIATOR



EF-62N



SOUND BY
BOSE

LIFESTUDIO POP Plus

RESOLUTION **4K PRO-UHD** | SUPPORT BLUETOOTH AUDIO | COMPACT SIZE **1.6kg**
UP TO **150"** | **700** | **AUTO IMAGE** | **5W+5W**
SCREEN SIZE | LUMENS | ADJUSTMENT | 2-WAY WITH DUAL PASSIVE RADIATOR



CREATE YOUR FANTASY MOMENT

EF-71



SOUND BY
BOSE

LIFESTUDIO FLEX

RESOLUTION **Full HD 1080p** | SUPPORT BLUETOOTH AUDIO | **Over 5,000,000:1**
UP TO **150"** | **700** | **AUTO IMAGE** | **5W+5W**
SCREEN SIZE | LUMENS | ADJUSTMENT | 2-WAY WITH DUAL PASSIVE RADIATOR



EF-72



SOUND BY
BOSE

LIFESTUDIO FLEX Plus

RESOLUTION **4K PRO-UHD** | SUPPORT BLUETOOTH AUDIO | **Over 5,000,000:1**
UP TO **150"** | **1000** | **AUTO IMAGE** | **5W+5W**
SCREEN SIZE | LUMENS | ADJUSTMENT | 2-WAY WITH DUAL PASSIVE RADIATOR



ULTRA LIFESTYLE PROJECTORS

ULTRA LIFESTYLE PROJECTORS

CO-FH02/01 FEATURES

Superior Image Quality
High Clarity Display

Compact and Lightweight
High Portability

Offering a brightness of 3,000 lumens and Full HD 1080p resolution, the CO-FH02/01 allows for clear and vivid presentations even in well-lit environments.

The projector's portability with its lightweight and compact design enables users to conveniently carry and install in different environments to project visuals that are integral in facilitating discussions and small conferences outside of the office.



Project Anywhere

The CO-FH02/01 not only benefit businesses, but also home users thanks to its cross-over usability, creating an enjoyable experience in entertainment, learning, and large-screen infotainment.



Your Lifestyle Companion

Embrace versatility and portability with our all-in-one lifestyle projectors, fit for any form of entertainment you choose. Enjoy seamless streaming with Andriod TV™*, high-contrast visuals, impactful audio, and enhance your lifestyle with vivid entertainment anywhere you go.



*For CO-FH02.

THE PERFECT COMPANION FOR WORK & PLAY

CO-FH02



RESOLUTION **Full HD 1080p** | SUPPORT BLUETOOTH AUDIO | COMPACT SIZE **2.6kg**

UP TO **391"** SCREEN SIZE | **3000 LUMENS** | **AUTO VERTICAL KEystone ADJUSTMENT** | **5W MONO SPEAKERS**



THE VERSATILE HOME ENTERTAINMENT PROJECTOR

CO-FH01



Chromecast built-in™, Bluetooth audio support, and streaming of Android TV™ content requires purchase of ELPAP12 Android TV™ Dongle. Dongle is sold separately.

RESOLUTION **Full HD 1080p** | COMPACT SIZE **2.4kg**

UP TO **391"** SCREEN SIZE | **3000 LUMENS** | **5W MONO SPEAKERS**



ULTRA ENTERTAINMENT PROJECTORS

SEE
ULTRA
EXPERIENCE
ULTRA-FUN

Go beyond the TV. With Epson home projectors, you can truly immerse yourself in the action.



Aesthetically pleasing
no matter where you place it

Elevate your home entertainment with a full lineup of streaming options. With Google TV™ or Android TV™, enjoy endless movies, shows, and more – all from the comfort of your living room.

LIFESTUDIO GRAND EpiqVision Ultra



EH-TW6250




EH-LS670B



EH-LS800B

Immersive and Frameless
Large Sized Display

Maximise your on-screen entertainment with these feature-packed projectors, providing a frameless capability by breaking image size constraints. Your best alternative for home entertainment, projecting up to a 500-inch* screen size – much larger than what a conventional TV screen can provide.

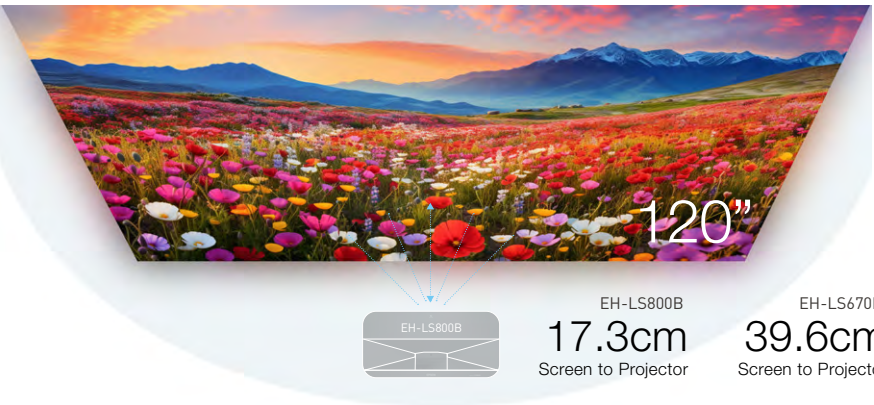

Elevate your Big Screen Experience with

ELPSC35 and ELPSC36
100-inch 120-inch

ALR Screen


For EH-LS670B & EH-LS800B

Be immersed in a cinematic experience right at home with 4K content on the ELPSC35 and ELPSC36 Ambient Light Rejecting (ALR) screens. Be prepared to get blown away by the vibrant and realistic images with better contrasts and deeper blacks.

*For EH-TW6250.

Flexible Placement
Optimal Placement


These sleek and compact projectors blend in seamlessly anywhere in your living space. Choose a projector that fits your requirement from a wide range of choices.

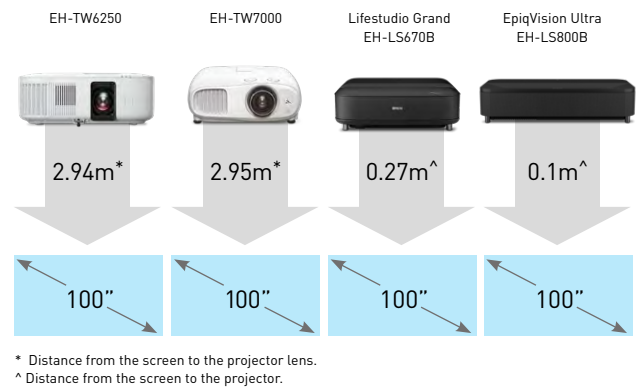

Plug-and-Play
Quick Start-Up

For EH-LS670B and EH-LS800B

Enjoy your favorite shows instantly with Epson projectors' quick start-up in less than 8 seconds!

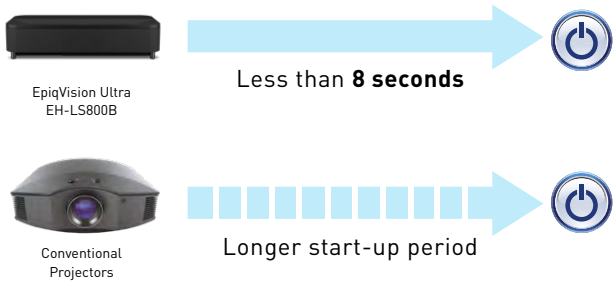

Fine-tune your sound experience with **Bose** speaker

For Lifestudio Grand EH-LS670B

Enjoy impactful audio that fills the room with the world's first smart streaming projectors featuring Sound by Bose technology. The custom-designed stereo system creates audio you can feel, delivering rich, balanced sound with deep bass, pulling you – and everyone around you – right into the action. We can't wait for you to hear it.




Bluetooth built-in

Effortless smartphone connection. Also works great as a speaker.



Sound by Bose is a trademark of Bose Corporation, used under license by Epson.


Flexible, Immersive Projection.

SMART 4K PRO-UHD HOME THEATRE PROJECTOR	SMART 4K PRO-UHD LASER PROJECTION TV
<h3>EH-TW6250</h3> 	<h3>EH-LS800B</h3> 
<p>35,000:1 Contrast Ratio</p> <p>UP TO 500" SCREEN SIZE</p> <p>2800 LUMENS</p> <p>LENS SHIFT ADJUSTMENT</p> <p>10W MONO SPEAKERS</p>	<p>Over 2,500,000:1 Contrast Ratio</p> <p>UP TO 150" SCREEN SIZE @ JUST 0.28m</p> <p>4000 LUMENS</p> <p>MOTION SENSOR LASER LIGHT SAFETY</p> <p>20W SOUND OUTPUT INCL. 1x WOOFER</p>
   <p>POWERED BY androidtv</p>	    <p>POWERED BY androidtv</p>

ULTRA SHORT THROW PROJECTOR SERIES

SMART 4K PRO-UHD LASER PROJECTION TV

EH-LS670B



SOUND BY BOSE

LIFESTUDIO GRAND






Over 5,000,000:1 Contrast Ratio

UP TO 120" SCREEN SIZE @ JUST 0.40m

3600 LUMENS

MOTION SENSOR LASER LIGHT SAFETY

20W SOUND OUTPUT INCL. 1x WOOFER





Advanced 3LCD and Laser Light Source

Epson's original 3LCD technology combined with an advanced laser light source delivers extremely bright images, even in well-lit environments, while achieving high image quality that is true to life. It provides an immersive viewing experience, making you feel as if you were there at the movie.

Sound by Bose is a trademark of Bose Corporation, used under license by Epson. Google TV is a trademark of Google LLC.

SEE
ULTRA
EXPERIENCE
ULTRA-BRIGHT

Experience stunning 4K visuals with
Epson's ultra-bright projection.



Immersive 4K Experience

With ease of installation, wider lens shift, 4K resolution, and less light leakage,
you can now enjoy your favourite movies in a perfect viewing environment.
Experience breathtaking and vivid projection quality with Epson's Bright Cinema
mode, and customise each show according to your preferences,
thanks to the picture quality processing functions*.



EH-LS9000B



EH-LS12000B



EH-QL3000W/B
(with optional champagne gold vanity board and lens)

Exceptional Realism
Real 4K Experience*

Transform your home into the center of action with
advanced pixel-shifting technology and three high-definition
LCD chips for an exceptionally sharp 4K picture.



Enhanced Detail and Colour
Dynamic Tone Mapping

For EH-QL3000W

Optimises HDR scene-by-scene for precise brightness
and contrast, enhancing detail and colour accuracy for
a more immersive viewing experience.




*Achieved by shift-technology.

Ultimate **State-Of-The-Art** Big Screen Experience

Smooth Fast-Moving 4K Video
Frame Interpolation

With the improved frame interpolation technology, never miss out on any detail when watching fast-moving sports or gaming. Get clear image contours and smooth motion for a more holistic 4K viewing experience.

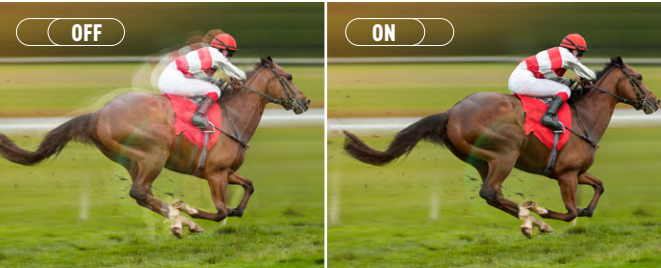

Gaming Optimised Performance
4K and 120 FPS

For EH-QL3000W/B

The EH-QL3000W/B supports 4K resolution at 120fps and ALLM, optimising your gaming experience with PS5 and Xbox for smooth, high-quality visuals in your living room.



Precise HDR Detail and Vibrant Color Modes **Enhanced Visual Clarity**

HDR10+* and Hybrid Log-Gamma deliver precise detail in light and dark scenes, ensuring vibrant images and improved contrast for optimal brightness in any environment




Mode: Cinema

Mode: Vivid

*EH-QL3000W/B supports HDR10.


Unparalled Colour Realism
3LCD Laser Technology

Equipped with unique cutting-edge 3LCD optical engine, the projectors deliver incredible contrast and equals white and colour brightness from jet black to rich, vibrant colours.

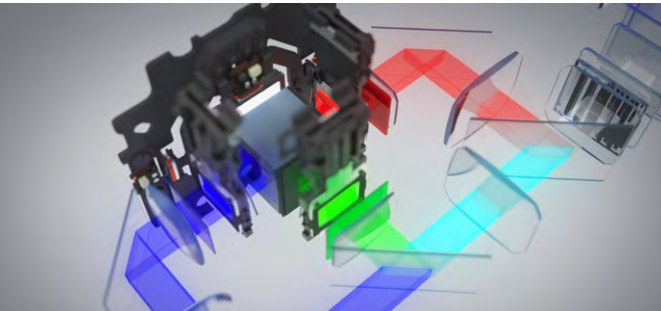

Vivid and Precise Visuals
Powerful 4K Image Processor

Experience vibrant colours and exceptional clarity with our powerful 4K image processor, enhancing detail and supporting HDR10+/HLG* for superior image quality.

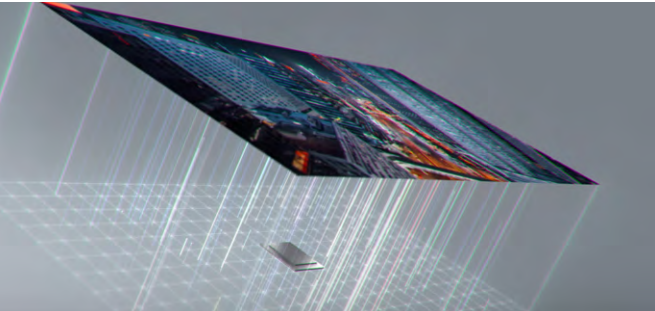

*EH-QL3000W/B supports HDR10.

Phenomenal Brilliance.

HIGH DYNAMIC 4K PRO-UHD HOME THEATRE PROJECTOR

EH-LS9000B



Over **2,500,000:1**
Contrast Ratio

RESOLUTION **4K**

UP TO **300"**
SCREEN SIZE

2200
LUMENS

POWERED
LENS SHIFT



PREMIUM 4K ULTRA HD HOME THEATRE PROJECTOR

EH-LS12000B



Over **2,500,000:1**
Contrast Ratio

RESOLUTION **4K**

UP TO **300"**
SCREEN SIZE

2700
LUMENS

POWERED
LENS SHIFT



PREMIUM 4K ULTRA HD HOME THEATRE PROJECTOR

EH-QL3000W/B



EH-QL3000W with optional champagne gold vanity board and lens.

Over **5,000,000:1**
Contrast Ratio

RESOLUTION **4K**

UP TO **1,000"**
SCREEN SIZE


6000
LUMENS

Interchangeable
Lens and Vanity Board
OPTION



Customisable Look

Enhance interiors with customisable champagne gold vanity boards and lens housing for a sophisticated, unobtrusive finish.



Precision and Flexibility with 4K Lenses


Japan-made 4K lenses offer precise focus and superior colour reproduction with 11 interchangeable options for flexible installation.




HDR10+™ logo is a trademark of HDR10+ Technologies, LLC.

Wide Range of **Connectivity**


Home entertainment is more accessible than ever! Epson’s projectors offer integrated support for multiple connection methods, including HDMI, to suit a variety of devices.




Smart Device
(For selected models only)




Computer




Game




Blu-ray Player



Screen Mirroring
(For selected models only)



Camera




Bluetooth Speaker
(For selected models only)

Built-in **Wireless Projection***

Epson’s projectors enable high-contrast, vivid high-definition images with built-in wireless transmission. Conveniently project your favorite shows and movies from Android, iOS devices, and PCs via Wi-Fi or Miracast.

*Selected models. Check the model specification for more information.

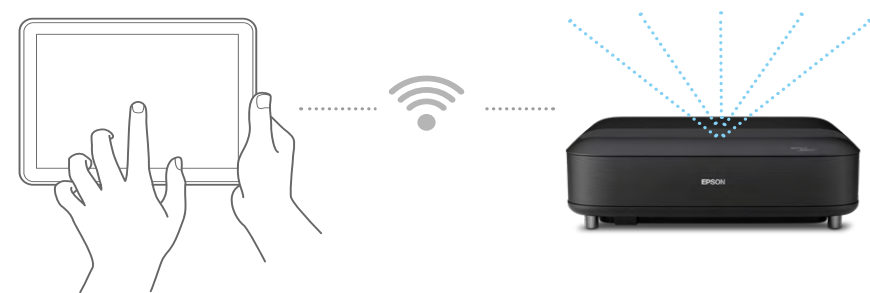

Fuss-free Setup with **Epson Setting Assistant**

Compatible with EH-LS670B and EH-LS800B

Save on set-up time with the Epson Setting Assistant app. Correct the shape of projected image automatically just by taking photo with your smart device’s camera, the app detects and corrects distortion in the projected image and adjusts its shape to match the screen*.



*Epson Setting Assistant App can be used when projecting onto a screen or to a wall. When projecting on to a wall, the app detects the unevenness or wavy edges of the projected image.



Efforts to mitigate environmental impacts in manufacturing



Toyoshina plant in Japan

Production Using **100%** Renewable Electricity

In December 2023, Epson transitioned to 100% renewable electricity at virtually all its global sites¹, marking a first for both the Japanese manufacturing sector² and the global projector industry³. This shift covers approximately 876 GWh⁴ of annual electricity, reducing CO2 emissions by around 400,000 tonnes per year.

By selecting optimal renewable sources like hydropower and geothermal, and investing in self-generation, Epson achieved its renewable energy goal within 2 years and 10 months of committing to do so in 2021. This includes the entire production process of Epson projectors, from design and development to manufacturing and assembly.

Over **80%** Recycled Cardboard Packaging

All carton box packaging of Epson’s projectors is made with over 80% recycled cardboard. Additionally, we are further committed to sustainability by using 100% pulp as cushion material, replacing expanded Polystyrene (EPS), and reducing environmental impact.



Closed Resource Loop

We strive to use resources more effectively by reducing the size and weight of products and utilising more recycled materials. In our EB-L890E series, we use 65% post consumer resin (PCR) material for the projector main body and 100% recycled pulp mold for the packaging.

1 Among Japanese companies that have joined the RE100. Current as of January 9, 2024, per Epson research.
2 Excludes some sales sites and leased properties where the amount of electricity consumed cannot be determined
3 GHG (Greenhouse Gas), GHG scope 1, 2, 3 emission

SPECIFICATIONS

MODEL NUMBER		Lifestudio Pop EF-61G	Lifestudio Pop Plus EF-62N
Projection Technology		RGB liquid crystal shutter projection system	
Specification of Main Parts			
LCD	Size	0.62"	
	Native Resolution	Full HD (1080p)	
Resolution On-Screen (Maximum)			
Projection Lens	Resolution	Full HD	4K PRO-UHD ¹
	Pixel Number	2.1M pixels (1,920 x 1,080)	4.1M pixels (1,920 x 1,080 x 2)
	Type	No Optical Zoom / Focus (Powered)	
	F-Number	1.6	
	Focal Length	16.6 mm	
Lightsource	Zoom Ratio	1.0 – 3.33 (Digital Zoom)	
	Throw Ratio (Wide - Tele)	1.2	
	Type	LED	
	Life (Normal / Low ²)	Over 20,000 hours / Over 20,000 hours	
Screen Size (Projected Distance)			
Zoom: Wide		30" to 150" [0.78 to 4.02 m]	
Standard Size		60" screen 1.59 m	
Brightness ^{*3}			
Colour Light Output		700 lm	
White Light Output (Normal / Eco)		700 lm / 350 lm	
Contrast Ratio		Over 5,000,000:1	
Internal Speaker(s)			
Sound Output		5W + 5W 2-way with dual passive radiator (Sound by Bose)	
Geometric Correction			
Auto Keystone Correction		Yes	
Connectivity			
Digital Input	HDMI	1 (eARC/ARC, HDMI 1.4)	1 (eARC/ARC, HDMI 2.3)
	Audio Out	1 (Headphone)	
USB Interface		For Firmware Update / Service	
Network	USB Type A / Mini-B		
	Wireless	Built-in (Smart Media Player)	
Wireless Specifications			
(Smart Media Player Functions)			
Wi-Fi Generation Name		Wi-Fi 6	
Supported Standards and Frequency		IEEE 802.11a (5GHz), IEEE 802.11b (2.4GHz), IEEE 802.11g (2.4GHz), IEEE 802.11n (2.4GHz and 5GHz), IEEE 802.11ac (5GHz), IEEE 802.11ax (2.4GHz and 5GHz)	
Supported Security Type		WPA2 / WPA3 PSK (AES), WPA2 PSK (AES)	
Adjustment Functions			
Colour Mode		Yes (Dynamic, Cinema, Vivid, Natural)	
Scene Adaptive Gamma		Yes (Off, Low, Medium, Strong)	
Operating Temperature		5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (over 2,286m / 7,500ft) [20%-80% Humidity, No Condensation]	
Operating Altitude		0 m to 3,048 m <0 ft to 10,000 ft> Over 1,500 m / 4,921ft: with high altitude mode	
Air Filter		5,000 hours	
Direct Power On/Off		N/A / N/A	
Start-Up Period		Less than 7.5 sec (until EPSON logo display)	
Suspend Mode		Less than 6 sec (until source image display)	
Cool Down Period		Instant Off	
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220-240V)			
Lamp On (Normal / Low ²)		95W / 56W	
Standby (Network On / Off)		2W / 0.5W	
Dimension Excluding Feet (W X D X H)		199 x 190 x 68 mm	
Weight		Approx. 1.6kg	
Fan Noise (Normal / Eco)		24dB / 20dB	

^{*1} Using Pixel shifting technology.

^{*2} Where Low = Eco/Extended/Quiet, whichever lower.

^{*3} Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

EF-61G/62N
Supplied Accessories
Power Cable: 1m x 1
AC Adapter for Power Cable
Bluetooth Remote Control with 2 x AAA Battery
Quick Start Guide

Optional Accessories
Safety Wire: ELPWR01
Wireless Karaoke Microphone: ELPKM01

EF-61G



EF-62N



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

SPECIFICATIONS

MODEL NUMBER		Lifestudio Flex EF-71	Lifestudio Flex Plus EF-72
Projection Technology		RGB liquid crystal shutter projection system	
Specification of Main Parts			
LCD	Size	0.62"	
	Native Resolution	Full HD (1080p)	
Resolution On-Screen (Maximum)			
Projection Lens	Resolution	Full HD	4K PRO-UHD ¹
	Pixel Number	2.1M pixels (1,920 x 1,080)	4.1M pixels (1,920 x 1,080 x 2)
	Type	No Optical Zoom / Focus (Powered)	
	F-Number	1.6	
	Focal Length	16.6 mm	
Lightsource	Zoom Ratio	1.0 – 3.33 (Digital Zoom)	
	Throw Ratio (Wide - Tele)	1.2	
	Type	LED	
	Life (Normal / Low ²)	Over 20,000 hours / Over 20,000 hours	
Screen Size (Projected Distance)			
Zoom: Wide		30" to 150" [0.78 to 4.02 m]	
Standard Size		60" screen 1.59 m	
Brightness ^{*3}			
Colour Light Output		700 lm	1,000 lm
White Light Output (Normal / Eco)		700 lm / 350 lm	1,000 lm / 500 lm
Contrast Ratio		Over 5,000,000:1	
Internal Speaker(s)			
Sound Output		5W + 5W 2-way with dual passive radiator (Sound by Bose)	
Geometric Correction			
Auto Keystone Correction		Yes	
Connectivity			
Digital Input	HDMI	1 (eARC/ARC, HDCP1.4)	1 (eARC/ARC, HDCP2.3)
	Audio Out	1 (Headphone)	
USB Interface		For Firmware Update / Service	
Network	USB Type A / Mini-B		
	USB Type C	N/A	Mobile Power supply (100W/140W PD supported)
Network		Built-in (Smart Media Player)	
Wireless Specifications			
(Smart Media Player Functions)			
Wi-Fi Generation Name		Wi-Fi 6	
Supported Standards and Frequency		IEEE 802.11a (5GHz), IEEE 802.11b (2.4GHz), IEEE 802.11g (2.4GHz), IEEE 802.11n (2.4GHz and 5GHz), IEEE 802.11ac (5GHz), IEEE 802.11ax (2.4GHz and 5GHz)	
Supported Security Type		WPA2/WPA3-PSK (AES), WPA2 PSK (AES)	
Adjustment Functions			
Colour Mode		Yes (Dynamic, Cinema, Vivid, Natural)	
Scene Adaptive Gamma		Yes (Off, Low, Medium, Strong)	
Operating Temperature		5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (over 2,286m / 7,500ft) [20%-80% Humidity, No Condensation]	
Operating Altitude		0 m to 3,048 m <0 ft to 10,000 ft> Over 1,500 m / 4,921ft: with high altitude mode	
Air Filter		5,000 hours	
Direct Power On/Off		N/A / N/A	
Start-Up Period		Less than 7.5 sec (until EPSON logo display)	
Suspend Mode		Less than 6 sec (until source image display)	
Cool Down Period		Instant Off	
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220-240V)			
Lamp On (Normal / Low ²)		135W / 82W	
Standby (Network On / Off)		2W / 0.5W	
Dimension Excluding Feet (W X D X H)		190 x 190 x 248 mm	
Weight		Approx. 4.0kg	
Fan Noise (Normal / Eco)		23dB / 20dB	28dB / 22dB

^{*1} Using Pixel shifting technology.

^{*2} Where Low = Eco/Extended/Quiet, whichever lower.

^{*3} Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

EF-71/72
Supplied Accessories
Power Cable: 1m x 1
AC Adapter for Power Cable
Bluetooth Remote Control with 2 x AAA Battery
Quick Start Guide

Optional Accessories
Floor Stand: ELPFS01
Safety Wire: ELPWR01
Wireless Karaoke Microphone: ELPKM01

EF-71



EF-72



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

Find out more at www.epson.com.sg/projectors



EpsonSingapore



EpsonSingapore



EpsonSoutheastAsia



Epson Singapore



EpsonSingapore

Epson Singapore Pte Ltd
Epson Authorised Service Centre
438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

Find out more at www.epson.com.sg/projectors



EpsonSingapore



EpsonSingapore



EpsonSoutheastAsia



Epson Singapore



EpsonSingapore

Epson Singapore Pte Ltd
Epson Authorised Service Centre
438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

SPECIFICATIONS

MODEL NUMBER		CO-FH01	CO-FH02
Projection Technology		RGB liquid crystal shutter projection system	
Specification of Main Parts			
LCD	Size	0.62" (C² Fine)	
	Native Resolution	Full HD (1080p)	
	Type	No Optical Zoom / Focus (Manual)	
	F-Number	1.44	
	Focal Length	16.4 mm	
Projection Lens	Zoom Ratio	1 – 1.35 (Digital Zoom)	
	Throw Ratio	1.19 – 1.61	
	Type	Lamp: 188W UHE	
Lightsource	Life¹ (Normal / Eco)	6,000 / 12,000 hours	
Screen Size (Projected Distance)			
Zoom: Wide		34" to 391" [0.89 to 10.40 m]	
Zoom: Tele		26" to 290" [0.91 to 10.41 m]	
Standard Size		60" screen 1.58 m	
Brightness²²			
Colour Light Output		3,000 lm	
White Light Output (Normal / Eco)		3,000 lm / 2,000 lm	
Internal Speaker(s)			
Sound Output		5W Monoaural	5W Monoaural with enclosure
Geometric Correction			
Keystone	Vertical	±30°	
	Horizontal	±30°	
Auto Keystone Correction		N/A	Yes (Vertical)
Quick Corner		Yes	
Connectivity			
Analog Input	D-Sub 15pin	N/A	
	Composite	N/A	
Digital Input	HDMI	1	
Audio In		N/A	
Audio Out		N/A	
USB Interface	USB Type A	1 (for Wireless LAN, Firmware Update, Copy OSD Settings)	1 (for Power Supply, Firmware Update, Copy OSD Settings)
	USB Type B	1 (for Firmware Update, Copy OSD Settings)	
Network	Wired LAN	N/A	
	Wireless	Optional	N/A
Wireless Specifications			
(Smart Media Player Functions)			
Wireless LAN			
Wi-Fi Generation Name		Wi-Fi 5	
Supported Standards and Frequency		IEEE 802.11a (5GHz)³, IEEE 802.11b (2.4GHz)³, IEEE 802.11g (2.4GHz)³, IEEE 802.11n (2.4GHz and 5GHz)³, IEEE 802.11ac (5GHz)³	
Supported Security Type		WPA2/WPA3-PSK (AES)	
Wireless Specifications			
(Optional Wireless LAN)			
Wireless LAN			
Wi-Fi Generation Name		Wi-Fi 4	N/A
Supported Standards and Frequency		IEEE 802.11b (2.4GHz): 11 Mbps³, IEEE 802.11g (2.4GHz): 54 Mbps³, IEEE 802.11n (2.4GHz)³: 72.2 Mbps³, IEEE 802.11a (5GHz)³: 54 Mbps³, IEEE 802.11n (5GHz)³: 150 Mbps³,	N/A
Supported Mode		Infrastructure, Access Point	N/A
Supported Security Type		Infrastructure: Open, WPA2/WPA3-PSK Access Point: WPA2-PSK (AES)	N/A
Adjustment Functions			
Light Output		Yes [High, Low (Eco)]	
Colour Mode		Dynamic, Vivid, Cinema, Presentation, Blackboard, sRGB	
Scene Adaptive Gamma		Yes	
Aspect Mode		Yes	
Operating Temperature			
		5 - 40 °C <41 - 104 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 35 °C <41 - 95 °F> (over 2,286m / 7,500ft) [20%-80% Humidity, No Condensation]	
Operating Altitude			
		0 m to 3,048 m <0 ft to 10,000 ft>	
Direct Power On/Off		Yes / Yes	
Start-Up Period		About 6 seconds / Warm-up period: 30 seconds	
Cool Down Period		Instant Off	
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220-240V)			
Lamp On (Normal / Eco)		270W / 214W	
Standby (Network On / Off)		N/A / 0.5W	
Dimension Excluding Feet (W X D X H)		295 x 211 x 82 mm	320 x 211 x 82 mm
Weight		Approx. 2.4kg	Approx. 2.6kg
Fan Noise (Normal / Eco)		38dB / 29dB	37dB / 29dB

¹ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

² Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

³ These modes and actual data throughputs depend on supported wireless mode of source devices and/or environmental conditions.

CO-FH01
Supplied Accessories
Power Cable: 1.8m x 1
Remote Control with 2 x AAA Battery
Quick Start Guide

Optional Accessories
Document Camera: ELPDC21
Ceiling Mount: ELPMB23
Soft Carrying Bag: ELPKS69
Safety Wire: ELPWR01
Wireless Presentation System: ELPWP20
Smart Media Player: ELPAP12



CO-FH02
Supplied Accessories
Power Cable: 1.8m x 1
ELPAP12 Android TV Dongle with USB and HDMI Cable
Remote Control with 2 x AAA Battery
Netflix BT Remote Control with 2 x AAA Battery
Quick Start Guide

Optional Accessories
Wireless Presentation System: ELPWP20



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

SPECIFICATIONS

MODEL NUMBER		EH-TW6250
Projection Technology		RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts		
LCD	Size	0.61" wide panel (C ² Fine, 10 Bit)
	Native Resolution	Full HD (1080p)
Resolution On-Screen (Maximum)	Resolution	4K PRO-UHD*1
	Pixel Number	4.2M pixels (1920 x 1080 x 2)
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)
	F-Number	1.49 – 1.77
	Focal Length	18.2 – 29.2 mm
	Zoom Ratio	1 – 1.62
	Throw Ratio (Wide – Tele)	1.32 – 2.15
Lightsource	Type	Lamp: 200W UHE
	Lamp Life*2 (Normal / Medium / Eco)	4,500 / 4,500 / 7,500 hours
Screen Size (Projected Distance)		
Zoom: Wide	40" to 500" [1.15 to 14.83 m]	
Zoom: Tele	40" to 500" [1.89 to 24 m]	
Standard Size	80" screen 2.34 to 3.81 m	
Brightness*3		
Colour Light Output	2,800 lm	
White Light Output (Normal / Eco)	2,800 lm / 1,900 lm	
Contrast Ratio	35,000:1	
Geometric Correction		
Vertical / Horizontal Keystone	±30° / ±30°	
Auto Keystone Correction	Yes (Vertical ±30°, Zoom: Tele)	
Horizontal Slide Keystone Correction	Yes	
Quick Corner	Yes	
Lens Shift Range		
Lens Shift	Vertical: ±60% (H center)	
Image Enhancement		
4K Enhancement	Yes	
Aspect Mode	Yes (Auto / Normal / Full / Zoom)	
Frame Interpolation	Yes	
Image Preset Mode	Yes	
MPEG Noise Reduction	Yes	
Detail Enhancement	Yes	
Connectivity		
Digital Input	HDMI	1 (HDCP 2.3)
Audio Output	Stereo Mini Jack	1
Others	USB Type Mini-B	1 (for Firmware Update, Copy OSD Settings)
Wireless		Yes (for Smart Media Player)
Wireless Specifications (Smart Media Player Function)		
Wi-Fi Generation	Wi-Fi 5	
Supported Speed For Each Mode	IEEE 802.11a (5GHz)*3, IEEE 802.11b (2.4GHz)*3, IEEE 802.11g (2.4GHz)*3,	
	IEEE 802.11n (2.4GHz and 5GHz)*3, IEEE 802.11ac (5GHz)*3	
Operating Temperature		
	5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft)	
	5 - 30 °C <41 - 86 °F> (Over 2,286m / 7,500ft)	
	(20% - 80% Humidity, No Condensation)	
Operating Altitude		
	0 m to 3,048 m <0 ft to 10,000 ft>	
	Over 1,500m / 4,921 ft with High Altitude Mode	
Direct Power On / Off		
	Yes / N/A	
Start-Up Period		
	Less than 15 seconds,	
	Warm-up Period: 30 seconds	
Cool Down Period		
	Less than 5 seconds	
Power Supply Voltage		
	100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220 - 240V)		
Lamp (Normal / Eco)	301W / 231W	
Energy Saving	0.3 W	
Dimension Excluding Feet (W X D X H)		
	333 x 275 x 123 mm	
Weight (Including Standard Lens)		
	Approx. 4.1 kg	
Fan Noise (Normal / Eco)		
	36dB / 28dB	

¹ Using Pixel shift technology.

² Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

³ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

⁴ These modes and actual data throughputs depend on supported wireless mode of source devices and/or environmental conditions.

Supplied Accessories
Power Cable: 3m x 1 (Black)
Remote Control with 2 x AAA Battery
Interface Cover
Bluetooth Remote Control for SMP with 2 x AAA Battery
User Guide
ELPAP12 Android TV Dongle with USB and HDMI Cable

Optional Accessories
Spare Lamp: ELPLP97
Air Filter: ELPAF54
Ceiling Mount (White Colour): ELPMB23
Safety Wire: ELPWR01



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

SPECIFICATIONS

MODEL NUMBER		Lifestudio Grand EH-LS670B
Projection Technology		RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts		
LCD	Size	0.62"
	Native Resolution	1080p (Full HD)
	Resolution On-Screen (Maximum)	
Resolution On-Screen (Maximum)	Resolution	4K PRO-UHD*
	Pixel Number	4.2M Dots (1920 x 1080 x 2)
Projection Lens	Type	No Optical Zoom / Focus (Manual)
	F-Number	1.6
	Focal Length	3.7 mm
	Zoom Ratio	1 – 2.5 (Digital Zoom)
	Throw Ratio (Wide – Tele)	0.25 – 0.62 (Digital Zoom)
Lightsource	Type	Laser Diode
	Life (Normal / Low*)	20,000 / 20,000 hours
Screen Size (Projected Distance)		
Zoom: Wide	60" to 120" [32.5 cm to 70.3cm]	
Zoom: Tele	N/A	
Standard Size	77" screen 43.3cm	
Brightness ³		
Colour Light Output	3,600 lm	
White Light Output (Normal / Eco)	3,600 lm / 1,800 lm	
Contrast Ratio		
Over 5,000,000:1		
Internal Speakers		
Sound Output	2.1ch Satellite x 2, Woofer x 1 (Sound by Bose)	
Geometry Correction		
Point Correction	Yes	
Quick Corner	Yes	
Connectivity		
Digital Input	HDMI	3 (SMF, HDMI2=eARC, HDCP2.3)
Audio Output		1 (Headphone), 1 (S/PDIF)
USB Interface	USB Type A	2
	USB Type B	1
Network	Wireless	Built-in (Smart Media Player)
Wireless Specification (Smart Media Player Function)		
Wi-Fi Generation	Wi-Fi 6	
Supported Speed For Each Mode	IEEE 802.11a (5GHz), IEEE 802.11b (2.4GHz), IEEE 802.11g (2.4GHz), IEEE 802.11n (2.4GHz and 5GHz), IEEE 802.11ac (5GHz), IEEE 802.11ax (2.4GHz, 5GHz and 6GHz)	
Supported Security Type	WFA WPA/WPA2/WPA3 personal, WPS2.0, WAPI	
Adjustment Functions		
Colour Mode	Dynamic, Standard, Cinema, Natural	
Scene Adaptive Gamma	Yes (Off, Low, Medium, Strong)	
Aspect Mode	Super Zoom, 4:3, Movie expand 14:9, Movie expand 16:9, Full, Unscaled	
Operating Temperature		
5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (Over 2,286m / 7,500ft) (20% - 80% Humidity, No Condensation)		
Operating Altitude		
0 m to 3,048 m <0 ft to 10,000 ft> (over 1,500 m / 4,921 ft : with High altitude mode)		
Start-Up Period		
Less than 7.1 seconds (until EPSON logo display) Warm-up period: 30 seconds		
Suspend Mode		
Less than 7.1 seconds (until source image display)		
Cool Down Period		
Instant Off		
Power Supply Voltage		
100 - 240 V AC ±10%, 50/60 Hz		
Power Consumption (220 - 240V)		
Lamp On (Normal / Low*)	254W / 162W	
Standby (Network On / Off)	2.0W / 0.5 W	
Dimension Excluding Feet (W X D X H)		
467 x 400 x 133 mm		
Weight (Including Standard Lens)		
Approx. 7.4 kg		
Fan Noise (Normal / Eco)		
29dB / 20dB		

*1 Using Pixel shifting technology.
*2 Where Low = Eco/Extended/Quiet, whichever lower.
*3 Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

Supplied Accessories
Power Cable: 1.8m x 1
Remote Control with 2 x AAA Battery
Quick Start Guide

Optional Accessories
Air Filter: ELPAF60
100" ALR Screen: ELPSC35
120" ALR Screen: ELPSC36
Wireless Karaoke Microphone: ELPKM01



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

SPECIFICATIONS

MODEL NUMBER		EpiqVision Ultra EH-LS800B
Projection Technology		RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts		
LCD	Size	0.62" (C² Fine)
	Native Resolution	1080p (4KE)
	Aspect Ratio	16:9
Resolution On-Screen (Maximum)	Resolution	4K PRO-UHD*1
	Pixel Number	4.2M Dots (1920 x 1080 x 2)
Projection Lens	Type	No Optical Zoom / Focus (Manual)
	F-Number	1.8
	Focal Length	2.3 mm
	Zoom Ratio	1 – 2.5 (Digital Zoom)
	Throw Ratio (Wide – Tele)	0.16 – 0.40
Lightsource	Type	Laser Diode
	Life (Normal / Eco)	20,000 hours
Screen Size (Projected Distance)		
Zoom: Wide	80" to 150" [0.28 to 0.54 m]	
Zoom: Tele	32" to 60" [0.28 to 0.54 m]	
Standard Size	90" screen 0.32m	
Brightness ²		
Colour Light Output	4,000 lm	
White Light Output (Normal / Eco)	4,000 lm / 2,000 lm	
Contrast Ratio		
Over 2,500,000:1		
Internal Speakers		
Sound Output	20W (YAMAHA 2.1ch Satellite x2, Woofer x1)	
Image Enhancement		
4K Enhancement	Yes (On/Off)	
Aspect Mode	Yes (Auto / Full / Zoom)	
Frame Interpolation	Yes (Off / Low / Normal / High)	
Image Preset Mode	Yes	
Noise Reduction	Yes (Except 4K Signal)	
Super Resolution	Yes	
Connectivity		
Digital Input	HDMI	3 (HDCP 2.3)
Audio Output		1 (Stereo Mini), 1 (S/PDIF)
Others	USB Type A	3 (for USB Storage, RJ45, Camera, Mic, HID) USB3 is for 5V/2A Power Supply, No USB Function
		1 (for Firmware Update)
Network	USB Type Mini-B	Yes (for Smart Media Player)
	Wireless	
Wireless Specification		
(Smart Media Player Function)		
Wireless LAN	Wi-Fi 5	
Supported Speed For Each Mode	IEEE 802.11a (5GHz) ³ , IEEE 802.11b (2.4GHz) ³ , IEEE 802.11g (2.4GHz) ³ , IEEE 802.11n (2.4GHz and 5GHz) ³ , IEEE 802.11ac (5GHz) ³	
Bluetooth	Bluetooth 5.0 Class 2 (2.4GHz)	
Supported OS	Android OS	
Supported VOD Platform	Android TV	
Video Output Resolution	Up to 3,840 x 2,160 60fps at 4:2:0	
Operating Temperature		
0 - 40 °C <32 - 104 °F> (0m / 0ft - 2,286m / 7,500ft) 0 - 35 °C <32 - 95 °F> (Over 2,286m / 7,500ft) (20% - 80% Humidity, No Condensation)		
Operating Altitude		
0 m to 3,048 m <0 ft to 10,000 ft> Over 1,500m / 4,921 ft, with High Altitude mode		
Start-Up Period		
Less than 8 seconds, Warm-up period: 30 seconds		
Cool Down Period		
Instant Off		
Power Supply Voltage		
100 - 240 V AC ±10%, 50/60 Hz		
Power Consumption (220 - 240V)		
Lamp On (Normal / Quiet, Extended)	335W / 210W	
Standby (Network On / Off)	2.0W / 0.4 W	
Dimension Excluding Feet (W X D X H)		
695 x 341 x 145 mm		
Weight (Including Standard Lens)		
Approx. 12.3 kg		
Fan Noise (Normal / Eco)		
32dB / 19dB		

*1 Using Pixel shift technology.
*2 Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.
*3 These modes and actual data throughputs depend on supported wireless mode of source devices and/or environmental conditions.

EpiqVision Ultra EH-LS800B
Supplied Accessories
Power Cable: 1.8m x 3
Remote Control with 2 x AAA Battery
User Guide Kit

Optional Accessories
Air Filter: ELPAF64
AndroidTV dongle: ELPAP12
100" ALR Screen: ELPSC35
120" ALR Screen: ELPSC36
Ceiling Mount: ELPMB22
Safety Wire: ELPWR01



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.


Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp


Information correct at time of printing.
Printed January 2026

Find out more at www.epson.com.sg/projectors



Epson Singapore Pte Ltd 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
Epson Authorised Service Centre 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

Find out more at www.epson.com.sg/projectors



Epson Singapore Pte Ltd 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
Epson Authorised Service Centre 6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

SPECIFICATIONS

MODEL NUMBER		EH-LS9000B
Projection Technology		RGB liquid crystal shutter projection system
Specifications of Main Parts		
LCD	Size	0.74"
	Native Resolution	1080p (Full-HD)
Resolution On-Screen (Maximum)	Resolution	4K**
	Pixel Number	8.3M Dots (1920 x 1080 x 4)
Projection Lens	Type	Power Zoom, Power Focus
	F-Number	2.0 – 3.0
	Focal Length	22.5 – 46.7 mm
	Zoom Ratio	1 – 2.1
Throw Ratio		1.35 – 2.84
	Type	Laser Diode
Lightsource	Life (Normal / Low**)	20,000 / 20,000 hours
Screen Size (Projected Distance)		
Zoom: Wide		50" to 300" [1.48 to 9.08 m]
Zoom: Tele		50" to 300" [3.13 to 18.99 m]
Standard Size		100" screen 3.00 to 6.30 m
Brightness³		
Colour Light Output		2,200 lm
White Light Output (Normal / Eco)		2,200 lm / 1,000 lm
Contrast Ratio		
		Over 2,500,000:1
Geometric Correction		
Vertical / Horizontal Keystone		±30 degrees
Quick Corner		Yes
Point Correction		Yes
Lens Shift Range		
Vertical Lens Shift		±96.3 % (H Center, Powered)
Horizontal Lens Shift		±24 % (V Center, Powered)
Image Enhancement		
Frame Interpolation		Yes
Image Preset Mode		Yes
Noise Reduction		Yes
MPEG Noise Reduction		Yes
Super Resolution		Yes
Auto Contrast Enhancement		Yes
Connectivity		
Digital Input	HDMI	2 (HDMI2=eARC/ARC, HDCP 2.3)
USB Interface	USB Type A	2 (1: 480Mbps for Firmware Update, Copy OSD Settings, Save Log or 5V/2A Power Supply) (2: for 5V/300mA Power Supply) [This port has no USB function, for Opt.HDMI]
		1 (for Firmware Update, Copy OSD Settings)
Control I/O	USB Type B	1
	RS232C	1 (Stereo mini)
	Trigger Out	RJ45 x 1
Network	Wired LAN	
Adjustment Functions		
Colour Mode		Dynamic, Vivid, Bright Cinema, Cinema, Natural
Scene Adaptive Gamma		Yes
Aspect Mode		Yes (Auto, Full, Zoom, Anamorphic Wide, Horizontal Squeeze)
Operating Temperature		
		5 - 35 °C <41 - 95 °F> (0m / 0ft - 2286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (Over 2,286m / 7,500ft) 20% - 80% Humidity, No Condensation
Operating Altitude		
Air Filter ⁴		0 m to 3,048 m <0 ft to 10,000 ft> (over 1,500 m / 4,921 ft : with High altitude mode)
		5,000 hours
Direct Power On / Off		
		Yes / NA
Start-Up Period		
		Less than 8 seconds Warm-up period: 30 seconds
Cool Down Period		
		Instant Off
Power Supply Voltage		
		100 - 240 V AC +/- 10%, 50/60 Hz
Power Consumption (220 - 240V)		
Lamp/LD On (Normal / Low**)		302W / 198W
Standby (Network On / Off)		2W / 0.4W
Dimension Excluding Feet (W X D X H)		
		520 x 447 x 169 mm
Weight		
		Approx. 12.7 kg
Fan Noise (Normal / Eco)		
		30 dB / 22dB

¹ Using Pixel shifting technology.

² Where Low = Eco/Extended/Quiet, whichever lower.

³ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

⁴ When used in general office environments (the amount of floating dust: 0.04 – 0.2 mg/m³). Based on the Epson's in-house test results.

Supplied Accessories

Power Cable: 3m x 1
Remote Control with 2 x AA Battery
Quick Start Guide

Optional Accessories

Air Filter: ELPAF62
Ceiling Mount: ELPMB22
Safety Wire: ELPWR01
Android TV Dongle: ELPAP12



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

SPECIFICATIONS

MODEL NUMBER		EH-LS12000B
Projection Technology		RGB liquid crystal shutter projection system
Specifications of Main Parts		
LCD	Size	0.74" wide panel with SMLA (C2Fine, 12bit, OD)
	Native Resolution	1080p
Resolution On-Screen (Maximum)	Resolution	4K**
	Pixel Number	8.3M Dots (1920 x 1080 x 4)
Projection Lens	Type	Power Zoom, Power Focus
	F-Number	2.0 – 3.0
	Focal Length	22.5 – 46.7 mm
	Zoom Ratio	1 – 2.1
	Throw Ratio	1.35 – 2.84
Lightsource	Type	Laser Diode: 198W
	Life	Laser Life: 20,000 hours (Normal / ECO)
Screen Size (Projected Distance)		
Zoom: Wide		50" to 300" [1.48 to 9.08 m]
Zoom: Tele		50" to 300" [3.13 to 18.99 m]
Standard Size		100" screen 3.00 to 6.30 m
Brightness³		
Colour Light Output		2,700 lm
White Light Output (Normal / Eco)		2,700 lm / 1,000 lm
Contrast Ratio		
Over 2,500,000:1		
Geometric Correction		
Vertical Keystone		±30 degrees
Lens Shift Range		
Vertical Lens Shift		±96.3 % (H Center, Powered)
Horizontal Lens Shift		±47.1 % (V Center, Powered)
Connectivity		
Digital Input	HDMI	2 (HDCP2.3; HDMI2: eARC/ARC)
USB Interface	USB Type A	2 (1: Firmware Update, Copy OSD Settings, Save Log or 5V/2A Power Supply; 2: For Opt HDMI and 5V/300mA Power Supply)
		1 (for Firmware Update, Copy OSD Settings)
Control I/O	USB Type Mini-B	D-Sub 9pin x 1
	RS-232C	3.5mm Mini Jack x 1
	Trigger Out (12V)	RJ45 x 1
Network	Wired LAN	
Adjustment Functions		
High Dynamic Range		Yes (HDR10, HDR10+) ⁵
Aspect Mode		Yes (Auto / Full / Zoom / Anamorphic Wide / Horiz. Squeeze)
Frame Interpolation		Yes
Auto Contrast Enhancement		Yes
Scene Adaptive Gamma		Yes
Image Enhancement		
Image Preset Mode		Yes (Off / Preset1 / Preset2 / Preset3 / Preset4 / Preset5)
MPEG Noise Reduction		Yes
Super Resolution		Yes (Fine line adjust / Soft focus detail)
Operating Temperature		
		5 - 35 °C <41 - 95 °F> (0m / 0ft - 2286m / 7,500ft)
		5 - 30 °C <41 - 86 °F> (Over 2,286m / 7,500ft)
		20% - 80% Humidity, No Condensation
Operating Altitude		
Direct Power On / Off		0 m to 3,048 m <0 ft to 10,000 ft> (over 1,500 m / 4,921 ft : with High altitude mode)
Start-Up Period		Yes / NA Less than 8 seconds Warm-up period: 30 seconds
Cool Down Period		
Instant Off		Instant Off
Power Supply Voltage		
100 - 240 V AC +/- 10%, 50/60 Hz		
Power Consumption (220 - 240V)		
Lamp/LD On (Normal / Eco)		302W / 198W
Standby (Network On / Off)		2W / 0.4W
Dimension Excluding Feet (W X D X H)		
520 x 447 x 169 mm		
Weight		
Approx. 12.7 kg		
Fan Noise (Normal / Eco)		
30 dB / 22dB		

¹ Using Pixel shift technology.

² Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

³ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

⁴ These modes and actual data throughputs depend on supported wireless mode of source devices and/or environmental conditions.

⁵ Certified Conditions (HDR10+): Projection Size: 80 inch, Color Mode: Natural, HDR10/HDR10+ Setting: 3.

EH-LS12000B

Supplied Accessories

Power Cable: 3m x 1
Remote Control with 2 x AA Battery
Cable Cover
User Guide Kit

Optional Accessories

Air Filter: ELPAF62
Ceiling Mount: ELPMB22
AndroidTV dongle: ELPAP12



©2026 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026

Find out more at www.epson.com.sg/projectors



Epson Singapore Pte Ltd
Epson Authorised Service Centre
438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

Find out more at www.epson.com.sg/projectors



Epson Singapore Pte Ltd
Epson Authorised Service Centre
438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
6 Harper Road, #04-01 Leong Huat Building, Singapore 369674. Epson Helpdesk: 800-120-5564. Please refer to www.epson.com.sg/contact for opening hours.

SPECIFICATIONS

MODEL NUMBER		EH-QL3000W/B (LENS NOT INCLUDED)
Projection Technology		RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts		
LCD	Size	1.04" wide panel with DMLA (C2 Fine, 12 bit, OD)
	Driving Method	Poly-silicon TFT active matrix
Resolution On-Screen (Maximum)	Resolution	4k ^{*1}
	Pixel Number	8.3M pixels (1920 x 1080 x 4)
	Aspect Ratio	16:9
	Pixel Arrangement	Cross stripe
	Type	Power Zoom, Power Focus
Projection Lens	F-Number	1.8 – 2.3
	Focal Length	36.0– 57.3 mm
	Zoom Ratio	1.0 - 1.61
	Throw Ratio	1.52 – 2.47 (Digital)
	Lens Shift	Vertical: ±64% (H center, Powered)
		Horizontal: ±16% (V Center, Powered)
	Type	Laser Diode
Lightsource	Life (Normal)	20,000 hours
Screen Size (Projected Distance)		
Zoom: Wide		60" – 1,000" [1.98 – 34.19 m]
Zoom: Tele		60" – 1,000" [3.24 - 55.28 m]
Standard Size		100" screen 3.35 m
Brightness^{*2}		
White/Colour Light Output		6,000 lm / 6,000 lm
Light Output (Center) ^{*3}		6,300 lm
Light Output Uniformity		85%
Colour Reproduction		Up to 1.07 Billion Colours
Contrast Ratio		Over 5,000,000:1
Geometric Correction		
Vertical / Horizontal Keystone		±45° / ±30° with Standard Zoom Lens
Quick Corner		Yes
Curved Surface Correction		Yes
Point Correction		Yes
Corner Wall		Yes
Geometry Correction Memory		Yes
Connectivity		
Digital Input	HDMI Type A	2 (HDCP 2.3)
USB Input	USB Type A	2 (For SMF1, Firmware Update, Copy OSD Settings or 5V/2A, 5V0.9A Power Supply, Content Playback)
	USB Type B	1 (For Firmware Update, Copy OSD Settings)
Control I/O	RS-232C	1 (D-Sub 9pin)
Audio Output	Stereo Mini	1
Network	Wired LAN	RJ45 x 1 (100Mbps)
Operating Temperature		
		Low Altitude (0 - 2,286m/7,500ft): 5 - 35 °C <41 - 95 °F>
		High Altitude (Over 2,286m/7,500ft): 5 - 30 °C <41 - 86 °F>
		20% - 80% Humidity, No Condensation
Operating Altitude		
		Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)
Air Filter^{*4}		20,000 hours
Direct Power On / Off		Yes / N/A
Start-Up Period		Less than 9 seconds (Epson Logo); Warm-up Period: 20 seconds
Cool Down Period		Instant Off
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz
Power Consumption (220 - 240V)		
Laser Diode On	Normal	437 W
	Extended	346 W
Standby (Normal / Eco)		2.0 W / 0.5 W
Dimension Excluding Feet (W X D X H)		568 x 568 x 181 mm
Weight		Approx. 21.1kg
Fan Noise (Normal / Eco)		28dB / 26dB

^{*1} Using Pixel shift technology.

^{*2} Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

^{*3} This light output value is measured at the center of the screen as a reference value. There is no official standard for light output (Center) measurements and this measurement is made based on the method set by Epson.

^{*4} When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

- Supplied Accessories**

Power Cable: 3m, 3 wire

Remote Control: Yes, with Alkaline AA Battery

Vanity Board (White)

Cable cover

User Guide
- Optional Accessories**

Suspension Adapter: ELPPFP15

Air Filter: ELPAF46

Ceiling Mount: ELPMB67/47/48

AndroidTV dongle: ELPAP12

Vanity board: ELPVB05

(Champagne Gold):

Lens Housing (White): ELPVB02W

Lens Housing (Black): ELPVB03B

Lens Housing (Champagne Gold): ELPVB04C
- Optional Lenses**

Ultra Short Throw Lens: ELPLX02S

Zoom Lens: ELPLU03S, ELPLU04, ELPLW05, ELPLW06, ELPLW08, ELPLM08, ELPLM10, ELPLM11, ELPLM15, ELPLL08



©2026 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2026