



DELIVERING PRECISE AND RELIABLE COPIES EVERY TIME.

Elevate Precision and Efficiency with Epson DLQ-3500II Printing.

Achieve detailed precision for your printing needs with Epson DLQ-3500II/ DLQ-3500IIN, the first Dot matrix printer with colour LCD monitor panel. Built to deliver extreme print volume requirements and extraordinary output quality with print speeds of up to 550 characters per second (cps), up to eight-part forms with absolute accuracy as well as ribbon yield of up to 6 million characters, the versatile DLQ-3500II/3500IIN dot matrix printer is the ideal solution to maximise business efficiency.



8-copies Printing



Colour LCD Control Panel



High Speed Printing



Ethernet



Cost Effective

ENGINEERED FOR good

Epson genuine ribbons ensure greater yield, better quality and longer lifespan.



Smooth Daily Operation

The first Dot Matrix printer with user-friendly 1.44" colour LCD monitor allow you to modify your printing job easily.

Increased Productivity

Boost workplace efficiency with speed of up to 550 characters per second (10cpi).

Absolute Convenience

Experience fuss-free printing with built-in network connectivity* via Ethernet cable.


*DLQ-3500IIN only.

SPECIFICATIONS

Model Number	DLQ-3500II		DLQ-3500IIN
Print Technology			
Printing Method	Impact dot matrix		
Number of Pins in Head	24 pins x 2 (total 48 pins)		
Print Direction	Bi-direction with logic seeking		
Control Mode	ESC/P2 and IBM PPS/DS emulation		
Features	Auto Platen Gap Adjustment, Auto Sheet Alignment, Auto Print Position Adjustment, Auto Paper Pass Change		
Printer Speed			
High Speed Draft	10 cpi	550 cps	
Draft	10 cpi	550 cps	
Draft Condensed	17 cpi	501 cps	
LQ	10 cpi	195 cps	
LQ Condensed	17 cpi	333 cps	
Print Characteristics			
Character Table			
1 Italic and 12 graphical character tables		Italic table, PC437 (US Standard Europe), PC850 (Multilingual), PC860 (Portuguese) ³ , PC861 (Icelandic), PC865 (Nordic), PC863 (Canadian-French), Abicomp, BRASCI, Roman 8, ISO Latin 1, PC 858, ISO 8859-15	
Special Font (Thai Model only)		Busaba, Jittra Font	
Bitmap Fonts		Supported 7 character tables: KU42, TIS11, TIS13, TIS16, TIS17, TIS18, TSM/WIN	
Scalable Fonts		EPSON Draft/ Courier: 10 / 12 / 15 cpi ; EPSON Roman / Sans Serif: 10 / 12 / 15 cpi, Proportional ; EPSON Prestige: 10 / 12 cpi ; EPSON Script/ OCR-B/ Orator/ Orator-S: 10 cpi ; EPSON Script C: Proportional	
Barcode		EPSON Roman/ Sans Serif/ Roman T/ Sans Serif H: 10.5 pt, 8 pt – 32 pt (every 2 pt)	
Printable Columns		EAN-13, EAN-8, Interleaved 2 of 5, UPC-A, UPC-E, Code 39, Code 128, POSTNET	
Pitch	10 cpi	136 columns	
Paper / Media Handling			
Paper Path		Manual Insertion (Front in, front out), Tractor (Rear in, front out)	
Cut Sheet			
Single Sheet	80.0 - 420.0mm (3.15 - 16.5")	90.0 - 420.0mm (3.15 - 16.5")	0.065 - 0.19mm (0.0025 - 0.0074")
	80.0 - 420.0mm (3.15 - 16.5")	90.0 - 420.0mm (3.15 - 16.5")	0.12 - 0.62mm (0.0047 - 0.024")
Multi Sheet	80.0 - 420.0mm (3.15 - 16.5")	90.0 - 420.0mm (3.15 - 16.5")	0.12 - 0.62mm (0.0047 - 0.024")
Continuous Paper (Single Sheet/Multi Part)			
	76.2 - 558.8mm (3.0 - 22.0")	101.6 - 406.4mm (4.0 - 16.0")	0.065 - 0.19mm (0.0025 - 0.0074")
Envelope			
No. 6	92.0mm (3.6")	165.0mm (6.5")	0.16 - 0.52mm (0.0063 - 0.0205")
	105.0mm (4.1")	241.0mm (9.5")	0.16 - 0.52mm (0.0063 - 0.0205")
No. 10	100.0 - 200.0mm (3.9 - 7.8")	100.0 - 200.0mm (3.9 - 7.8")	0.22mm (0.0087")
Card			
	100.0 - 200.0mm (3.9 - 7.8")	100.0 - 200.0mm (3.9 - 7.8")	0.22mm (0.0087")
Labels (Base Sheet)			
	76.2 - 558.8mm (3.0 - 22.0")	101.6 - 406.4mm (4.0 - 16.0")	Total: 0.16 - 0.19mm (0.07 - 0.09") Base: 0.07 - 0.09mm (0.0028 - 0.0035")
Card			
	100.0 - 200.0mm (3.9 - 7.8")	100.0 - 200.0mm (3.9 - 7.8")	0.22mm (0.0087")
Copies			
	1 original + 7 copies		
Line Spacing			
	4.23mm (1/6") or programmable in increments of 0.0706mm (1/360")		
Acoustic Noise			
	Approx. 59 dB(A) (ISO 7779 pattern)		
Input Data Buffer			
	128 KB		
Interface			
	USB 2.0, Bi-directional parallel (IEEE-1284 nibble mode supported)	USB 2.0, Bi-directional parallel (IEEE-1284 nibble mode supported), 100base-Tx wired LAN	
Ribbon Cartridge			
Standard	Fabric Ribbon Cartridge (Black)		
Ribbon Life	Approx. 6 million characters ¹		
Reliability			
Mean Print Volume Between Failure (MVBFB)	25 million lines (except print head)		
Mean Time Between Failure (MTBF)	10,000 Power On Hours (POH)		
Print Head Life	200 million strokes/wire		
Control Panel			
	13 switches and 3 LEDs with 1.44" CLR LCD Screen		
Environmental Conditions (Operating)			
Temperature ²	5 – 35°C		
Humidity ²	10 – 80% RH		
Electrical Specification			
Rated Voltage	AC 100 – 240V		
Rated Frequency	50 – 60 Hz		
Power Consumption	Operating	Approx. 78 W	
	Sleep Mode	Approx. 0.8 W Approx. 1 W	
Supported Operating System			
Printer Driver	Microsoft Windows® XP / Vista / 7 / 8 / 8.1 / 10 / 11		
	Microsoft Windows® Server 2003 / 2008 / 2008 R2 / 2012 / 2012 R2 / 2016 / 2019 / 2022		
Utility	Epson Status Monitor 3		
	Microsoft Windows® XP / Vista / 7 / 8 / 8.1 / 10 / 11		
	Microsoft Windows® Server 2003 / 2008 / 2008 R2 / 2012 / 2012 R2 / 2016 / 2019 / 2022		

Dimensions & Weight

Weight: Approx. 18.9kg

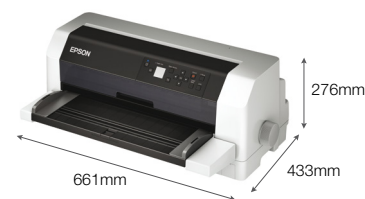

Consumables and Options

Ribbon Cartridge (Black) C13S015587

Legend

cpi characters per 25.4mm (characters per inch)
cps characters per second
cpl characters per line

What's In The Box

Ribbon cartridge (Black), Power supply cable, Push tractor unit, Rear sheet guide

Disclaimers:

- Actual print yield may vary depending on usage purpose and environment.
- Without condensation.
- PC861 (Icelandic), Abicomp, BRASCI, Roman 8, ISO Latin 1 only. Not available for Thai version.

©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing.
Printed May 2024

Find out more at www.epson.com.sg/dotmatrix



Epson Singapore Pte Ltd
Epson Customer Care Center

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500
100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.