#### A4 MONOCHROME INKJET PRINTERS **WORKFORCE PRO WF-M5399/M5899**

## EPSON

# **UNLOCK OFFICE EFFICIENCY WITH COST-EFFECTIVE AND RELIABLE PRINTING.**

#### Elevate Office Efficiency with Eco-Friendly, High Productivity A4 Monochrome Printers.

Engineered for eco-friendliness and peak efficiency, the Epson WorkForce Pro WF-M5399 and WF-M5899 monochrome printers embody unwavering performance with a consistent 25 ipm print speed. Encased in compact, space-saving design, they house an array of user-friendly features. With Heat-Free Technology, they embrace energy conservation, consuming less power and resources compared to traditional laser printers\*. These robust business inkjet printers feature high-yield ink packs for minimal maintenance downtime. Supported by a comprehensive software suite and versatile connectivity, they are the ultimate office solution.





Print Speed (Simplex/Duplex)



ABINITA CON



Ethernet

٥<u>١</u>٥ Open Platform

Epson Connect



Enabled

## ENGINEERED FOR GOOD

#### **Energy- and Resource-Saving**

REAL PROPERTY IN CONTRACTOR

The eco-friendly printers use less power\*, consumables, and replacement parts", and are built with 5% recycled plastic.

#### **Improved Productivity**

Printing at an improved speed of 25ipm with fast First Page Out Time (FPOT), the printer also supports various software solutions.

#### **Stress-Free Operation**

The WF-M5399/M5899 is packed with a multitude of new features to enhance usability, such as new user interface and high capacity ink packs.

Amendment of the below clause is updated as of 1<sup>st</sup> November 2021. \*Testing was commissioned by Epson and conducted by Keypoint Intelligence. One specific model was selected from color laser multi-function printers in the 65-70ppm class. Epson WorkForce Enterprise WF-C21000 with 100ppm lequivalent model in Europe was used during the evaluation]. This data is as of September, 2020. Devices were tested in default mode as per Keypoint Intelligence's projectary standard energy consumption test methods. Calculations were based on a weekday workload of 2 x 4 hours printing + 16 hours in sleep/standby mode, and weekend energy use of 48 hours in sleep/standby mode. A total of 69 pages of workload test pattern using DOC, XLS, PPT, HTML, PDF files and Outlook email messages were printed six times in each 4-hour printing period. \*\* Testing was commissioned by Epson and conducted by Keypoint Intelligence. One competitor model was selected from worldwide best-selling vendor^ in the 65ppm and 70ppm colour laser multi-function printer. Epson Work Force Enterprise WF-C20000 with 60ppm lequivalent model in Europe was used during the evaluation]. Consumables and periodic replacement parts required to print 1M pages. The weight includes all used consumables, periodical replacement parts and their packaging. Test printed pattern used was 15024712. ^Source: IDC's Worldwide Quarterly Hardcopy Peripherals Tracker 202002, Units Share by Company.

Combining durability and cost-efficiency, the environmentally-friendly Epson WorkForce Pro WF-M5399/M5899 monochrome business inkjet printers deliver exceptional print performance alongside an extensive selection of software solutions tailored for efficient office printing.


With an array of user-friendly features and versatile connectivity options, you can achieve higher productivity for your business.

## **Built for the Environment**

#### **Energy Saving**

The new WorkForce Pro Mono Inkjet printers use lower power consumption, fewer replacement parts, and fewer consumables than comparable Laser printer models, thereby reducing environmental impact without compromising on output.

Both the Epson WF-M5399 and WF-M5899 boast remarkably low TEC values of just 0.18 kWh and 0.2 kWh respectively. Additionally, unlike conventional laser copiers/ printers, these models generate no heat, thanks to the Epson PrecisionCore Heat-Free printhead technology, contributing to their enhanced environmental friendliness.

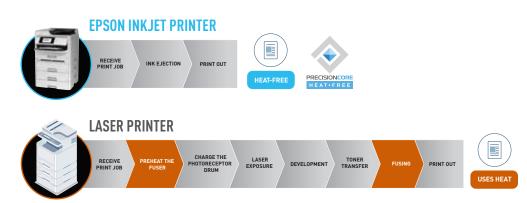

### Monochrome Business Inkjet Printer



## Comprehensive Workflow Solutions Empowering Productivity

## **Epson Solutions Suite**

Manage your device fleets, enhance document security, simplify workflow processes and reduce printing costs with a suite of software solutions.





#### Print Management

#### Epson Print Admin

A server-based solution that creates a secured centralised printing, scanning and copying environment through user authentication. Advanced reporting functions can help organisations reduce printing costs and run Managed Print Programmes.

#### Epson Print Admin – Advanced Workflows

Enable advanced document processing workflow features within Epson Print Admin. Convert documents into Searchable PDF with built-in OCR and automate processes by various job separation methods.



## **Superior Print Speed**

Designed for offices, PrecisionCore Heat-Free Technology enables a swift first page out at up to 25 ipm. Experience seamless workflows, reduced waiting times and enhanced energy efficiency, all contributing to a more productive workspace.

## **Engineered For Stress-Free Operation**



#### **Compact Size**

Compact and sleek, the WF-M5399/5899 design embodies efficiency, allowing you to accomplish more while taking up minimal space.

#### **New User Interface**

Enhanced usability with colour-coded icons for each function and quick access to print, scan, and copy features.

#### Efficient Document Management Only for WF-M5899

Automate your document workflows and digitalisation with a 1-pass duplex ADF scanner.

#### Low Running Cost with Less Intervention

The Replaceable Ink Pack System allows for easy installation and enables printing of up to 40,000 pages (Extra high capacity ink pack) with less intervention by reducing the frequency of consumables replacement.









#### Improved Paper Handling and Simple Maintenance

#### **Optional Cassettes**

Expand the paper handling capacity to up to 1,830 sheets by adding up to 3 optional paper cassettes with the capability to load different media types for automatic selection.

#### Paper Feed Roller

Extend the life of the printer and minimise down time with user replaceable periodic parts.

#### Document Management

#### Only for WF-M5899

#### **Document Capture Pro**

Scan, edit and process documents with automatic workflows. Convert documents into Searchable PDF or editable Office documents with built-in OCR and upload them to popular cloud storage. Automate processes by various job separation methods. Locate documents and improve security with index logs and securing network scanners with a password.

#### Document Capture Pro Server

Centralise scanning and document workflow supporting up to 1,000 scanning devices with a single server. Automate processes with OCR and Barcode detection capability. Improve security and document tracing with reports and indexing.

#### Document Capture Pro – Enhanced OCR

Expand the capability of OCR functions in Document Capture Pro with wider language support and improved accuracy. Capture data from forms with advanced indexing functions.

#### Fleet Management

#### Epson Device Admin

Monitor the status and simplify the task of configuration, maintenance and updating Epson devices in the network with a single tool. Receive alerts automatically when the devices indicated warning or error messages.

#### Epson Remote Service (ERS)

Cloud-based Device Management System which enables conveninet management, billing programmes and provide accurate support for devices in your or your customer's organisation.



#### Integration with Third-party Solutions

#### Epson Open Platform

Epson Open Platforms make the devices compatible with a wide variety of solutions in the market, making it possible to integrate Epson devices with enterprise applications and workflows based on the customer's needs.



#### **SPECIFICATIONS**

Print Prior         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS           Version Prior Compared         Petri Sen, Seg., Ex. eth.AC         Wet ASS	Model Number	WF-M5399 WF-M5899		Dimension & Weight	
Privite Text crock         Periodic Color: Privated         Periodic Color: Privated         Periodic Color: Privated           Private Text Color: Privated         Private Color: Privated		C11CK77506 Print	C11CK76506 Print, Scan, Copy, Fax with ADF	WF-M5399	
Nuclei Conjugation         Fold accode flows           Process of the Under Sector Lange         Data Lange Merce         Data Lange M		PrecisionCore Printhead	Weight: 15.0kg (33.1lb)		
Non-run Receiver         Non-run Receiver<	Nozzle Configuration	1,600 nozzles Black			
Minument Into Depart Musture     Like IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII					
Def Ter. Marce, Affer.       Up 0.2 Joint         Def Ter. Marce, Affer.       Up 0.2 Joint         Def Strake, Affer.       Def Ter. Marce, Affer.         Def Strake, Affer.       Def Ter. Marce, Affer.         Def Strake, Affer.       Def Strake, Affer.         Def Strake	Minimum Ink Droplet Volume				time t
BD 2.137. A. 6 Support       Dig		Lip to 34 ppm			
Part Ray Cut Trie         Approx 1.6 Sec           Control         Control <thcontro< th="">         Control         <thcontrol< th=""></thcontrol<></thcontro<>	ISO 24734, A4 Simplex	Up to 25 ipm			-
Printer Language         EBOOT 10 (1)         Comparison         EBOOT 10 (1)         Comparison         EBOOT 10 (1)         Comparison         EBOOT 10 (1)         Comparison					357r (14.
Enveloan - Core year - Core ye					(14.
Corpus         NA         Up to 22 pm         Up to 25 pm         Up to 2			ot Level 3	5	15
Care Second Back Bio Aries, Ar (1) C. 22 Bio Aries, Ar (1) C. 22 Bio Aries, Ar (1) C. 22 Bio Aries, Aries, C. 20 Bio Aries, Bio Aries, Aries, Aries, Bio Bio, Bio Bio Aries, Bio Aries, Aries, Aries, Bio Bio, Bio Bio Aries, Bio Aries, Bio Aries, Bio Bio Aries, Bio Aries, Bio Bio Bio Bio Bio Bio Bio Bio Bio Bio Bio Aries, Bio Bio Bio Bio Aries, Bio Bio Bio Bio Bio Bio Bio Bio Bio Bi		Yes (up to A4)			-
Biol 2478, A Lift Time     NA     IDE 2478, A Lift Time     IDE 2478, A Lift	Copy Speed (Black)			425mm	
SDD ATTS: A HT 2: 23       NA       Up to 4 tem				(16 7") 535mm	
Maximum Copy Gate from Standards         MA         Description         Maximum Copy Gate from Standards         MA           Scanse Topy Fore Torus         MA         Exp or 20 and 20 a	ISO 24735, A4 (1:2, 2:2)	N/A	Up to 14 ipm	(21.1)	
Reaction (P Experiment Rescalation (P Experiment Rescalation) (P Experiment Rescalation) (P Experiment Rescalation) (P Rescalation) Rescalation) (P Rescalation) (P Rescalation) Rescalation) (P Rescalation) (P					
Name         Bits / Lange         Bits / Lange         Construction	Reduction / Enlargement	N/A	25 – 400%, Auto Fit Function	WF-M5899	
Cory Représer fuit libre         N/A         Lingal, Biddinsmir HD, AL, Ca, DD           Seanner Type         NA         Pietbed codurinance scanner           Seanner Type         NA         Seanner Type           March Marc March Marc Marc March March March Marc March Marc Marc March Mar					
Seamen Iso         WA         Ipitated colour image scamer           Construct Seamen Lysic         NA         1250.2.2.3.000 gb         1250.2.2.3.000 gb           Construct Seam Ander         NA         1250.2.2.3.000 gb         1250.2.2.3.000 gb           Construct Seam Ander         NA         1250.2.2.3.000 gb         1250.2.2.3.000 gb           Construct Seamen Lysic         NA         1350.2.2.2.0.000 gb         1250.2.2.2.0.000 gb           Seamen Lysic         NA         1350.2.2.2.0.000 gb         1250.2.2.0.000 gb         120.2.0.0.000 gb           Pace Seamen Lysic         NA         120.2.0.0.0.000 gb         120.2.0.0.000 gb         120.2.0.0.000 gb           Pace Seamen Lysic         NA         120.2.0.0.000 gb         120.2.0.0.000 gb         120.0.000 gb           Pace Seamen Lysic         NA         120.0.000 gb         120.0.000 gb         120.0.000 gb           Pace Seamen Lysic         NA         120.0.000 gb         120.0.000 gb         120.0.000 gb           Pace Seamen Ly			Legal, Indian-Legal, 8.5x13in, Letter, A4, B5, A5, B6, A6,		
Scanner Type Maximum Steps Ass Scanner Type Maximum Steps Ass Maximum Ste	Scapping		100x148mm, #10, DL, C4, C6		
Optical Field of the control of the	Scanner Type				
Maximum Bison Area Consorted BL (2004)         V/A         PER 28/2 (and Bison Black Address Addres Address Address Address Address Address Address A	Sensor Type Optical Resolution			the comments of the	
Scarere fib Depth Color Barder 61 Depth Barder 64 White Barder 64 Whit	Maximum Scan Area			000	2.1
Gragicale       NA       19-bit Input. Behr pad.         Main Control (1)       Size (1) </td <td></td> <td>N/A</td> <td></td> <td>1</td> <td>357r</td>		N/A		1	357r
Bits A White Coll Speed Fuel of the set of	GrayScale	N/A	16-bit input, 8-bit input	C. C	(14.
Monochrome 200 dpl         N/A         5.0 sec/30 ppm (60 pm           Max         Sol Sec/30 ppm (60 pm)           Max         Sol Sec/30 ppm (60 pm)           Max         Sol Sec/30 ppm (60 pm)           Max         Max         Sol Sec/30 ppm (60 pm)           Max         Max         Max         Max         Max         Max         Max           Max		N/A	16-bit input, 1-bit input	5 E	14
Colour 200 dpi Par structure         NA         E 50 sec / 30 ppm / 60 jpm         42 sec / 30 ppm / 60 jp	Monochrome 200 dpi		5.0 sec / 30 ppm / 60 ipm		- •
Type of Fax:         NA         Walk up back-and-white and color fax capability         (6.7)         Storm           Encode Memory Page Memory         NA         Walk up back-and-white and color fax capability         (6.7)         (6.7)         (6.7)           Encode Memory Page Memory         NA         (16.7)         (16.		N/A	5.0 sec / 30 ppm / 60 ipm	425mm	
Récève Amony / Page Memory / Page Memory Encodes price Concention Model Ratio         NA         Page Memory / Page	Type of Fax			(16 7") 535mm	
Fax SeeuClotal Transfer Relay         NA         Up 15 338 kbps, Approx 3 ser/page           Fax SeeuClotal Transfer Relay         NA         Inter A A5         Inter A A5           Transfer Relay         NA         Latter, Hat Latter, AI, A5         Inter A5           ADF         NA         Latter, Hat Latter, AI, A5         Inter A64, A5           Secold Dial Croup Dial         NA         Latter, Hat Latter, AI, A5         Inter A64, A5           Secold Dial Croup Dial         NA         Latter, Hat Latter, AI, A5         Inter A64, A5           Fax Seculario         NA         Latter, Hat Latter, AI, A5         Inter A64, A50           Pare Croup Dial         NA         Latter, Hat Latter, AI, A5         Inter A64, (A000 Page Vield ')           Fax Seculario         NA         Scan to memory device / Storage function         Inter A64, (A000 Page Vield ')           Pare Face Name         NA         Scan to memory device / Storage function         Pager Face Face Name           VA         MA         Scan to memory device / Storage function         Pager Face Face Name         Crossmable & Order           Pager Face Name         VA         Scan to memory device / Storage function         Pager Face Name         Crossmable & Order           UB Face Name         Pager Face Name         Crossmable & Order         Crossmable & Order				(21.1")	
Transmission Pager Size Bight         MA         Letter, Half Letter, A4, A5           Bight         MA					
Flabbad         N/A         Letter, Half Letter, AA, A5         Inks         Orde           RADP         For AAC         Letter, Half Letter, AA, A5         Letter, Half Letter, HALF, A5         Letter, Half Letter, HALF, Half Letter, AA, A5         Letter, Half Letter, HALF, Half Letter, HALF, Half Letter, HALF, Half Letter, HALF, Half Le		N/A	Up to 200 x 200 dpi		
ADF Decking Parer Size Decking Parer Size Pare Features         NA         Letter, Hall Letter, A4, A5         Mix Pack (5:00 Fage Yield ') Eds. (5:00 Fage Yield ') NA         Mix Pack (5:00 Fage Yield ') NA <t< td=""><td></td><td>N/A</td><td>Letter, Half Letter, A4, A5</td><td>Inks</td><td>Order Cod</td></t<>		N/A	Letter, Half Letter, A4, A5	Inks	Order Cod
Speed Dail / Group Dial         N.A         Up to 200 dills. 198 groups         PC Fax (Fautures         Standard Capacity Back In Peck         C131           Fax Features         N/A         PC Fax (Fautures)					0.00.000
Fax Features     N/A     PC Fax (Transmission / Reader), Atoma (Read), Che Touch (Bad), Che					C13T11V10
Poling Reception, Fax Preview, Fax to E-mail, Memory Reception, Rex to Polar         Interpact (40,000 Page Yield *) Extra High Capacity         Interpact (40,000 Page Yield *) Extra High Capacity           ADF Function USB Host Yeap of Direct Printing Paper Head Method Paper Paper Photo Paper Phot	Fax Features	N/A	PC Fax (Transmission / Receive), Automatic Redial, One Touch Dial,		o
ADF Function         IFax to Folder           Support Paper Trickness         N/A         ISo sheets         Orde           Support Paper Trickness         N/A         ISo sheets         Orde           USB Host Function         N/A         ISo sheets         Orde         Orde           USB Host Function         N/A         ISo sheets         Orde         Orde         Orde           USB Host Function         N/A         ISo sheets         Orde			Polling Reception, Fax Preview, Fax to E-mail, Memory Reception,		C13T11W1
Augment Plana         NA         64 - 95 gm²           Card Stof / USB Host Function         N/A         52 sheats         Card Stof / USB Host Function         N/A           USB Host         N/A         Scan to memory device / Storage function         Mainterance Box         C122           USB Host         N/A         Mamory Devices         Mainterance Box         C122           Type of Direct Printing         Paper Float Relie for Cassetta A         C122         C122           Paper Hold Capacity         Us to 330 sheets (80 gm²)         C122         C122         C122           Maximum Input Capacity         Us to 330 sheets (80 gm²)         C122         C122         C122           Maximum Input Capacity         Us to 330 sheets (80 gm²)         C122         C122         C122           Supported Paper Size         Paper Float Cassetta 1: 250 sheets - Paper Cassetta 2: 4: 500 sheets x 4 + Rear Slot: 80 sheets)         Usot cassetta 4: 76 (80 gm²)         C122         C122         C02 (WF-M5899 only)         Usot cassetta 4: 76 (80 gm²)         C122         C122         C122         C02 (WF-M5899 only)         Usot cassetta 4: 76 (80 gm²)         C122         C122         C02 (WF-M5899 only)         Usot cassetta 4: 76 (80 gm²)         C122         C122         C022 Spoon Singapore Ple Lid. All Ripht         C122         C122         C122					C13T11Y10
Pager Capacity         N/A         So sheets         Orde           Card Slot / USB Host Function         N/A         Scan to memory device / Storage function         Mainteenee Box         Crassing / USB           USB Host         N/A         Scan to memory device / Storage function         Mainteenee Box         Crassing / USB           USB Host         N/A         Scan to memory device / Storage function         Mainteenee Box         Crassing / USB           Paper Float Mend         Friction Float         Mainteenee Box         Crassing / USB         Crassing / USB           Number of Paper Tays         2 (Front 1, Rear 1)         Device Storage function         Crassing / USB         Crassing / USB           Output Capacity         Up to 1 330 sheets (80 g/m)         Crassing / USB		N/A	64 - 95 g/m²		
USB Host       N/A       Scan to memory device / Storage function       Pager Feed Roller for Cassette A       C122         Paper Feed Method       Friction Feed       (Front 1, Rear 1)       Paper Method       Paper Addres for Cassette A       C122         Paper Hedd Roller for Cassette 1: 250 sheets a Paper Cassette 1: 250 sheets = Paper God Sheets (80 pm)       Paper Add Sheets (80 pm)       Paper Add Sheets (80 pm)       C122         Output Capacity       Up to 130 sheets (80 pm)       Paper God Sheets (80 pm)       C122       Software Solutions         Supported Paper Size       Paper Method       A.6, A5, A4, B6, B5, Half Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       Paper Feed Roller for Cassette 1: C120       Software Solutions         Supported Paper Size       Paper Feed Roller for Cassette 1: C20 sheets x 4 + Rear Slot: 80 sheets)       C122       Software Solutions         Supported Paper Size       Paper Feed Roller for Cassette 1: C20 sheets x 4 + Rear Slot: 80 sheets)       C122       Software Solutions         Supported Paper Size       Paper Feed Roller for Cassette A       C122       Software Solutions       C122         Supported Paper Size       Paper Feed Roller for Cassette A       C122       Software Solutions       C122         Supported Paper Size       Rear Kray K,		N/A	50 sheets		Order Cod
Type of Direct Printing         NA         Memory Devices         Proper Handling         Proper Handling           Paper Handling         Friction Feed         Clifford 1, Rear 11         Clifford 1, Rear 12         Cliffo		N/A	Scan to memory device / Storage function		C12C9382 C12C9382
Paper Instanting         Finition Fead         Optional Single Cassette -P2         C12C           Paper Instanting         Lifrent 1, Rear 1)         Software Solutions         Software Solutions         Finiti Admin         71100           Paper Hold Capacity         Up to 330 sheets (80 g/m²)         (Paper Cassette 1: 250 sheets + Paper Cassettes 2 - 4: 500 sheets x 4 + Rear Slot: 80 sheets)         Software Solutions         C12C           Supported Paper Size         A6, A5, A4, B6, B5, Half Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal         Paper Cassette 1: 250 sheets + Paper Cassettes 2 - 4: 500 sheets x 4 + Rear Slot: 80 sheets)         C0C         C12C           Supported Paper Paper         A6, A5, A4, B6, B5, Half Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal         Paper Cassette (80 g/m²)         C12C           Photo Paper Photo Paper         4.7 (1.50 Wide, 5 x 7', 8 x 10'         C12C         COR (WF-M5899 onk)         C12C           Supported Paper Weight         64 - 256 g/m²         Panel Lock, 10 Pitter, 100 N, 10		N/A	Memory Devices		C12C9382
Number of Paper Harys Paper Hold Capacity         2 (Front 1, Rear 1)           Input Capacity         Up to 330 sheets (80 g/m <sup>2</sup> )         (Paper Hold Capacity         Software Solutions           Output Capacity         150 sheets (80 g/m <sup>2</sup> )         (Paper Cassette 1: 250 sheets + Rear Slot: 80 sheets)         (Paper Cassette 1: 250 sheets +	Paper Feed Method	Friction Feed		Optional Single Cassette-P2	C12C9379
Input Capacity       Up to 330 sheets (80 g/m)       Page Cassette 1: 205 sheets + Pager Cassette 5: 4.500 sheets x 4 + Rear Slot: 80 sheets)       Epson Print Admin Advanced       C12C         Maximum Input Capacity       150 sheets (80 g/m)       (Pager Cassette 1: 2.50 sheets + Pager Cassettes 2 - 4: 500 sheets x 4 + Rear Slot: 80 sheets)       C12C       Work (WF-M5899 only)       Document Capture Pro Enhanced       C12C         Supported Pager       A, 6, 5, 4, 86, 85, Hall Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       Paint Pager       A, 6, 5, 64.       C12C       Work (WF-M5899 only)       Document Capture Pro Enhanced       C12C         Waximum Pager Size (Rear Tray)       215.6 x 6, 02 m.       215.6 x 6, 02 m.       C12C       Work (WF-M5899 only)       Document Capture Pro Enhanced       C12C         Waximum Pager Size (Rear Tray)       215.6 x 6, 02 m.       215.8 x 6,000 mm (8.5 x 236.2")       C12C       Work More Maximum Pager Size (Rear Tray)       Sim to p. left, right, bottom       C12C       CR (WF-M5899 only)       OCR (WF	Number of Paper Trays	2 (Front 1, Rear 1)			
(Paper Cassette 1: 250 sheets + Rear Slot: 80 sheets)     (Distantial finite Advanced Up to 1.830 sheets (80 g/m²)     (Citz)       Output Capacity     (Distantial finite Advanced Up to 1.830 sheets)     (Citz)       Supported Paper Size     (A, A, A, B, B, B, Hall Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal     (Citz)       Plain Paper     (A, A, S, A, B, B, B, Hall Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal     (Citz)       Maximum Paper Size (Rear Tray)     (Dist) Cole, CS, CS, C4     (Citz)       Maximum Paper Size (Rear Tray)     (Dist), Cole, CS, CS, C4     (Citz)       Maximum Paper Size (Rear Tray)     (Dist), Eds, S, X, 10°     (Citz)       Supported Paper Weight     G4 - 256 g/m²     (Citz)       Metwork Protocol     SNMP, HTTP, DHOP, POOPT APIRA, PING, DDNS, mDNS, SNTP, SLP, WSD, LLTD     (Citz)       Network Protocol     SNMP, HTTP, DHOP, POOPT APIRA, PING, DDNS, mDNS, SNTP, SLP, WSD, LLTD     (Control Prane)       Mobile and Cioud Printing     (Control Prane)     (Access Control)     (Control Prane)       Spoon Smart Panel, Epson Email Print, Import All Print, Maporta, Microsoft Universa Parel, Epson Email Print, Mapria, Microsoft Universa Print, ChromeOS     (Control Prane)       Supported Operating Systems     (A - 220 - 240V     (A - 220 - 240V       Maximum Capuer Paper Mark (Scing Control LCD)     (A - 220 - 240V     (A - 220 - 240V       Maximum Faner Site Consumption     (Dister mace) (S - 0 Hz <td></td> <td>Up to 330 sheets (80 g/m²)</td> <td></td> <td></td> <td>7110574</td>		Up to 330 sheets (80 g/m²)			7110574
Machanism input objective       Output objective       Output objective       Supported Paper Cassette 1: 250 sheets x 4 + Rear Slot: 80 sheets)       Workflows (WF-M6899 only)       Document Capture Pro Enhanced       C12C         Supported Paper Size       A6, A6, A6, B6, B5, Haff Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       More Capture Pro Enhanced       C12C         Maximum Paper Size       A6, A6, A6, B6, B5, Haff Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       More Capture Pro Enhanced       C12C         Maximum Paper Size       A6, A6, A6, B6, B5, Haff Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       More Capture Pro Enhanced       C12C         Maximum Paper Size       A6, A6, B6, B6, B5, Haff Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       More Capture Pro Enhanced       C12C         Maximum Paper Size       Generating Size       Status Protocol       Status Protocol       CCP         Network Naragement Protocols       SNMP, HTTP, DFCP, BOOTP, APIPA, PINA, DINS, SNTP, SLP, WSD, LLTD       Status Protocol       Status Protocol       Status Protocol         Mobile and Cloud Printing       Epson Smart Panel, Epson Email Print, ChromeOS       Control Panel       LCD Screen       Status Print Screen       Status Print Screen       Status Print Screen       Screen Status Print Screen Screen Colled       Screen Status Protocols       Screen Status Protocols       Screen Status Protocon Collect       Status Protocol College			ot: 80 sheets)	I	C12C9388
Output Capacity       150 sheets (80 g/m <sup>2</sup> )       Document Capture Pro Enhanced       C12C         Plain Paper       A6, A5, A4, B6, B5, Half Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal       Document Capture Pro Enhanced       C12C         Photo Paper       4 x 6 <sup>7</sup> , 163 Wide, 5 x 7°, 8 x 10°       Core NUF-MS899 only)       C12C         Maximum Paper Size (Rear Tray)       25.5 x 6,000 mm (6.5 x 23c.2°)       Core NUF-MS899 only)       C12C         Warding Paper Weight       64 - 255 g/m <sup>2</sup> Core NUF-MS899 only)       Core NUF-MS899 only)       C12C         VBS       USB       USB 2.0       Ethernet, Wi-FI IEEE 802, 11b/g/n, Wi-FI Direct (up to 8 devices)       Ethernet, Wi-FI IEEE 802, 11b/g/n, Wi-FI Direct (up to 8 devices)       Executive Protocol       Reserved. Reproduction in part or in whole, without the written permission from Epson, Sinthy protocol       Network Nanagement Protocols       South 1, DAP Address Book       South 1, Core NF 2, South 2, South 2, South 2, Core NF 2, South 2, South 2, South 2, Core Advert Sea to Cloud       Paper Air Protocol       A site X Print, Mooria, Microsoft Universal Print, ChromeOS       Control Panel       Exercise Care X Print, Mooria, Microsoft Universal Print, ChromeOS       Control Panel       Coloud       South 2, Sout	Maximum input Capacity	(Paper Cassette 1: 250 sheets + Paper Cassettes 2 - 4: 500 sheets x 4 + Rear Slot: 80 sheets)			
Photo Paper       A6, A5, A4, B6, B5, Hall Letter, 16K, Indian Legal, Letter, 8.5 x 13in, Legal         Photo Paper       4 x 6°, 169 Wido, 5 x 7°, 8 x 10°         Envelopes       #10, DL, C6, C5, C4         Maximum Paper Size (Rear Tray)       215.9 x 6.000 mm (8.5 x 236.2°)         Supported Paper Weight       64 - 256 g/m²         Interface       USB         USB       USB         Network Protocol       TCP/IP4, TCP/IP4, TCP/IP4, PD, IPP, PORT9100, WSD         Network Rangement Protocols       SMMP, HTTP, DHOP, BOOTP, APIPA, PINK, DINS, SNTP, SLP, WSD, LLTD         Security Functions       Panel Lock, IP Filtering, Panel Lock, IP Filtering, Confidential Print, Conditicatil Print, Access Control, LAP Address Book         Mobile and Cloud Printing       Epson Smart Panel, Epson Email Print, Microsoft Universal Print, ChromeOS         Supported Operating Systems       Windows X / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022         Mac       Mac OS X 10.9.5 or later, macOS 11 or later         Electrical Specifications Made Prequency Mac So To - Source       Source         Mate Prequency Mac So 18 W/h       0.20 WW/h         Operating Systems       Single Consumption O         Operating Systems       Source         Windows       Ac 220 - 240V         Rated Verage       Ac 220 - 240V <td< td=""><td></td><td></td><td></td><td></td><td>C12C9387</td></td<>					C12C9387
Photo Paper       4 x 6*, 16:9 Wide, 5 x 7*, 8 x 10*         Envelopes       #10, DL, C6, C6, C4         Maximum Paper Size (Rear Tray)       215.9 x 6,000 mm (6,5 x 236.2*)         Print Margin       Supported Paper Weight       64 - 2256 g/m²         USB       USB 2.0       USB 2.0       USB 2.0       Stand to the second		A6, A5, A4, B6, B5, Half Letter, 16K, India	an Legal, Letter, 8.5 x 13in, Legal	OCR (WF-M5899 only)	
Maximum Paper Size (Rear Tray)       215.9 x 6,000 mm (8.5 x 236.2")         Print Margin       3im top. left, right, bottom         Supported Paper Weight       64 - 256 g/m²         Interface       USB         USB       USB 2.0         Security Functions       Simpop. left, right, bottom         Network Nanagement Protocols       SNMP, ITTP, DHCP, BOOTP, APIPA, PING, DDNS, SNTP, SLP, WSD, LLTD         Security Functions       Panel Lock, IP Filtering, Confidential Print, Access Control         Mobile and Cloud Printing       Epson Smart Panel, Epson Email Print, Remote Print Driver, Remote Print Driver, Remote Print, Information Print, Remote Print Driver, Remote Print, Mopria, Microsoft Universal Print, ChromeOS         Driverless Solutions       Apple AirPrint, Mopria, Microsoft Universal Print, ChromeOS         Supported Operating Systems       Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022         Mac       Ac 220 - 240V         Rated Frequency       0.18 kW/h         Operating       9.8W         Stepp       1.1W         Operating       9.8W         Stepp       1.1W         Operating       9.8W					
Supported Paper Weight       64 - 256 g/m²         Interface       USB 2.0         USB Metwork       USB 2.0         Network Protocol       ICP/IPv4, TCP/IPv6, LPD, IPP, PORT9100, WSD         Network Management Protocols       SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, mDNS, SNTP, SLP, WSD, LLTD         Security Functions       Panel Lock, IP Filtering, Confidential Print, Confidential Print, Remote Print Driver, Remote Print Driver         Driverless Solutions       Apple AirPrint, Mopria, Microsoft Universal Print, ChromeOS         Control Panel       2.4* TFT Colour LCD         Vindows       2.4* TFT Colour LCD         Windows       Vindows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022         Mate of Voltage       Ac 220 - 240V         Rated Voltage       AC 220 - 240V         Rated Voltage       AC 220 - 240V         Standby       9.8W         Sleep 1.1.W       0.20 kW/h         0.20 kW/h       15.4W         1.2W       0.2W					
Interface       USB       USB 2.0         Version       Ethernet, Wi-Fi IEEE 802.11b/g/n, Wi-Fi Direct (up to 8 devices)       Control PLPV4, TCP/IPV6, LPD, PPP, PORT9100, WSD         Network Management Protocols       SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, mDNS, SNTP, SLP, WSD, LLTD       Reserved. Reproduction in part or in wholes         Security Functions       Confidential Print, Access Control       Access Control, LDAP Address Book       access Control, LDAP Address Book         Mobile and Cloud Printing       Epson Smart Panel, Epson Email Print, Remote Print Driver, Remote Print Driver       Epson Smart Panel, Ep	Print Margin	3mm top, left, right, bottom			
USB       USB 2.0         Network       Ethernet, Wi-Fi IEEE 802.11b/g/n, Wi-Fi Direct (up to 8 devices)         TOP/IPv4, TOP/IPv4, TOP/IPv6, LPD, IPP, PORT9100, WSD       SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, MDNS, SNTP, SLP, WSD, LLTD         Security Functions       SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, mDNS, SNTP, SLP, WSD, LLTD         Panel Lock, IP Filtering,       Panel Lock, IP Filtering, Confidential Print, Confidential Print, Access Control       Access Control, LDAP Address Book         Driverless Solutions       Apple AirPrint, Mopria, Microsoft Universal Print, ChromeOS       Epson Smart Panel, Epson Email Print, ChromeOS         Control Panel       CDS Creen       2.4" TFT Colour LCD       4.3" TFT Colour J 2016 / 2019 / 2022         Mac       Mac OS 11 0s for later, macOS 11 or later       mac OS 11 or later         Windows       Sound Y Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022       and may vary between countries. Please ch with local Epson offices for more informatio         Windows       Sound	Interface				
Network Protocol       TCP/IPv4, TCP/IPv6, LPD, IPP, PORTBION, WSD       Header of Inversion of Inv	USB		Diract (up to 8 dovices)	© 2023 Epson Singapore Pte Ltd.	All Rights
Network Management Protocols       SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, MDNS, SNTP, SLP, WSD, LLTD       without the written permission from Epson, strictly protocols         Security Functions       Panel Lock, IP Filtering, Confidential Print, Access Control       Access Control, LDAP Address Book       strictly Print, Mother Print, Access Control, Access Control, DDNS, SNTP, SLP, WSD, LLTD         Mobile and Cloud Printing       Epson Smart Panel, Epson Email Print, Access Control, DDNS, SNTP, SLP, WSD, LLTD       strictly print, Mother Print, Access Control, Access Control, Access Control, LDAP Address Book       strictly print, Mother Print, Mother Print, Access Control, Access Control, Control Panel         LCD Screen       2.4" TFT Colour LCD       4.3" TFT Colour Touch LCD       ames and other company names used he for identification purposes only and are the trademarks or registered trademarks of their respective owners. Print samples shown simulations only. Specifications and produce availability are subject to change without not and may vary between countries. Please change without not and may vary between countries. Please change without not and may vary between countries. Please change with local Epson offices for more informatio for More Print ICP Value         Power Consumption       0.28W       15.4W       12.W       Dealer's Stamp         Operating       9.8W       0.2W       0.2W       0.2W       0.2W       Dealer's Stamp	Network Protocol	TCP/IPv4, TCP/IPv6, LPD, IPP, PORT910	DO, WSD		
Mobile and Cloud Printing Epson Connect       Confidential Print, Access Control       Access Control, LDAP Address Book       of Selko Epson Corporation. All other produ- names and other company names used here for identification purposes only and are the for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any an rights in those marks. Print samples shown simulations only. Specifications and produce Mac OS X 10.9.5 or later, macOS 11 or later         Electrical Specifications Rated Voltage       AC 220 - 240V         Rated Voltage       AC 220 - 240V         Rated Frequency       0.18 kW/h       0.20 kW/h         Operating Standby       9.8W       30W         Steep       1.1W       0.2W       0.2W	Network Management Protocols	SNMP, HTTP, DHCP, BOOTP, APIPA, PII	NG, DDNS, mDNS, SNTP, SLP, WSD, LLTD		
Mobile and Cloud Printing         Epson Connect       Epson Smart Panel, Epson Email Print, Remote Print Driver       Epson Smart Panel, Epson Email Print, Remote Print Driver, Scan to Cloud       names and other company names used he for identification purposes only and are the trademarks or registered trademarks of the isoported Operating Systems         Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022       names and other company names used he for identification purposes only and are the trademarks or registered trademarks of the isoported Operating Systems         Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022       names and other company names used he for identification purposes only and are the trademarks or registered trademarks of the isoported Operating Systems         Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022       names and other company names used he for identification purposes only and are the trademarks or registered trademarks of the isoported Operating Systems         Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 / 2022       names and other company names used he for identification purposes only and are the trademarks or registered trademarks of the isoported Operating Systems         Windows Mac       AC 220 - 240V         Rated Vistage       AC 220 - 240V         Rated Frequency       0.18 kW/h         Operating       25W         Standby       9.8W         Standby	Security Functions			,	
Epson Connect       Epson Smart Panel, Epson Smart Panel, Epson Smart Panel, Epson Email Print, Remote Print Driver, Remote Print Driver       Epson Smart Panel, Epson Email Print, Remote Print Driver, Scan to Cloud       for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any an rights in hose marks. Print samples shown simulations only. Specifications and produc availability are subject to change without no and may vary between countries. Please ch with local Epson offices for more informatio Operating         Power Consumption Operating       25W       30W         Operating       25W       30W         Standby       9.8W       15.4W         Sleep       1.1W       0.2W					
Driverless Solutions         Apple AirPrint, Mopria, Microsoft Universal Print, ChromeOS           Control Panel         LCD Screen         2.4" TFT Colour LCD         4.3" TFT Colour Touch LCD         respective owners. Epson disclaims any an rights in those marks. Print samples shown simulations and produc availability are subject to change without nor and may vary between countries. Please ch with local Epson offices for more information (TEC) Value           Power Consumption         0.18 kW/h         0.20 kW/h         0.20 kW/h         Dealer's Stamp           Operating         25W         30W         15.4W         12.2W         Dealer's Stamp           Standby         9.8W         0.2W         0.2W         0.2W         0.2W         0.2W	Epson Connect				
LCD Screen       2.4" TFT Colour LCD       4.3" TFT Colour Touch LCD       rights in those marks. Print samples shown simulations only. Specifications and produc availability are subject to change without no and may ary between countries. Please change with local Epson offices for more information (TEC) Value         Power Consumption       0.20 kW/h       0.20 kW/h       0.20 kW/h       0.20 kW/h         Operating Standby       9.8W       15.4W       12.W       0.20 kW/h       0.2W				-	
Supported Operating Systems Windows       Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11, Windows Server 2003 / 2018 / 2012 / 2016 / 2019 / 2022         Mac       Mac OS X 10.9.5 or later, macOS 11 or later         Electrical Specifications       AC 220 - 240V         Rated Frequency       50 - 60 Hz         Typical Electricity Consumption       0.18 kW/h         Operating       25W         Standby       9.8W         Steep       1.1W         Power off       0.2W		2.4" TFT Colour LCD	4.3" TFT Colour Touch LCD		
Windows     Windows     Windows     Windows     Windows     Server 20037201872012720167201972022       Mac     Mac OS X 10.9.5 or later, macOS 11 or later     availability are subject to change without not and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemical with local Epson offices for more information and may vary between countries. Please chemica	Supported Operating Systems				
Electrical Specifications       AC 220 - 240V       and may vary between countries. Please ch with local Epson offices for more information         Rated Frequency       50 - 60 Hz					
Rated Frequency     50 - 60 Hz       Typical Electricity Consumption     0.18 kW/h       (TEC) Value     0.20 kW/h       Power Consumption     0.20 kW/h       Operating     25W       Standby     9.8W       Sleep     1.1W       Power off     0.2W	Electrical Specifications	· · · · ·			
Typical Electricity Consumption (TEC) Value     0.18 kW/h     0.20 kW/h       Power consumption Operating Standby     25W     30W       Standby     9.8W     15.4W       Sleep     1.1W     1.2W       Power off     0.2W     0.2W	Rated Voltage			with local Epson offices for more in	formation.
Power Consumption         30W           Operating         25W         30W           Standby         9.8W         15.4W           Sleep         1.1W         1.2W           Power off         0.2W         0.2W	Typical Electricity Consumption		0.20 kW/h		
Operating         25W         30W           Standby         9.8W         15.4W           Sleep         1.1W         1.2W           Power off         0.2W         0.2W				Dealer's Stamp	
Sleep         1.1W         1.2W           Power off         0.2W         0.2W	Operating				
Power off0.2W0.2W0.2W					
	Power off		0.2W		
Noise Level PC Printing/Plain Paper Default <sup>2</sup> 6.3 B(A), 53 dB(A)   6.5 B(A), 50 dB(A)	Noise Level	6 3 B(A) 53 dB(A)	6 5 B(A) 50 dB(A)		

formation correct at time of printing Printed October 2023

357mm (14.1")

357mm (14.1")

C13T11V100

C13T11W100

Order Code C12C938211

C12C938261

C12C938281

Print speed (Pages Per Vlinute) is calculated when printed on A4 plain paper in the fastest mode. Print speed may vary depending on system configuration, print mode, document complexity, software, type of paper used and connectivity. Print speed does not include processing time on host computer. Default mode in accordance with ISO7779 for MFPs. The quoted yields were estimated using ISO/IEC 22505 tests in Default Mode and single-sided continuous printing methodology, using the monochrome test pattern provided in ISO/IEC 19752. Actual yields wills oleware with high-red-ensity images, hot or dusty conditions or less frequent printing. Ink cartidge is used for printing and printer/al-lin-one maintenance. For print quality, part of the ink from the included cartridge is used for printer startup and a variable amount of ink remains in the cartridge after the "replace cartridge" signal.

Find out more at www.epson.com.sg/betterthanlaser

f EpsonSingapore 🔘 EpsonSingapore 🕟 EpsonSoutheastAsia in Epson Singapore 🗗 epsonsingapore

Epson Singapore Pte Ltd

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500

100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours. Epson Customer Care Center