LABEL PRINTERS LABELWORKS™ RANGE CATALOGUE



02

019

018

017

015 016

014

COMPREHENSIVE LABELLING SOLUTION FOR ADDED CREATIVITY & CONVENIENCE.



Print high-quality labels with a range of design possibilities and tape sizes with Epson LabelWorks. Take your labelling ideals to new heights with fast print speeds offering greater productivity without compromising the quality of your prints. Featuring wireless and network connectivity, easily print your labels from any of your devices. Find a labelling solution which will match your needs with Epson's comprehensive range of label printers.







Scratch Temperature Resistant Resistant Tapes Tapes

Water Resistant Tapes



Chemical Resistant Tapes

Strong Adhesive Tapes

IT'S IN THE DETAILS.

Affordable and Portable Printer

HOME / SOHO

HOME ORGANISATION







Kid toys organisation



Iron-on labelling for clothes organisation

Stationery labelling

Ribbon wrap for gifts

RECOMMENDED APPLICATIONS

Kitchen tools labelling

CRAFTING AND DECORATION





Handmade ribbon brooch

Pattern tapes for party cupcake toppers



Handmade gift card with pattern tapes

Models LW-K200 LW-K400 LW-C410 **Tape Width** 6, 9, 12, 18 mm 6, 9, 12 mm **Print Speed** 6 mm/sec 9 mm/sec **Print Resolution** 180 dpi / 64 dot 180 dpi / 96 dot No. of Lines Up to 2 lines Up to 4 lines PC/App Dependent **Barcode Printing** N/A Yes Min. 12mm Lead Waste Margin 10mm fix (PC/App Dependent) Cutter Manual Full Cut Automatic Full Cut Interface Standalone Bluetooth iOS, Android (Mobile) **Operating System** N/A Windows (PC) AC Adapter **Power Source** 6 x AAA Batteries (Optional) 6 x AA Batteries (Optional) 6 x AA Batteries (Optional)

PC / Wireless Connectivity Printer

OFFICE / CORPORATE

OFFICE ASSET MANAGEMENT





Filing organisation labels

RECOMMENDED APPLICATIONS

Asset management with barcode labels



Locker management with serial number labels



Power switch labels

LABORATORY/ HOSPITAL



Name tag labels for laboratory



Transparent labels for laboratory



CAUTION!

Medical tools labelling



Medicine organisation labels

MANUFACTURING / LOGISTIC / WAREHOUSE / IT NETWORKING



QR code/ barcode labels



Removable magnetic labels

Safety labels

Cable wrap

Models	LW-700	LW-600P	LW-1000P			
			5			
Tape Width	6, 9,12,1	8, 24 mm	6, 9,12,18, 24, 36 mm			
Print Speed	13 mm/sec	15 mm/sec	35 mm/sec			
Print Resolution	180 dpi /	/ 128 dot 360 dpi / 384 dot				
No. of Lines	Up to 8 lines	Up to 8 lines PC/App Dependent				
Barcode Printing		Yes				
Lead Waste Margin	Min. 10mm (PC/App Dependent)	Min. 12mm (PC/App Dependent)	Min. 10mm (PC/App Dependent)			
Cutter	Automati	c Full Cut	Automatic Full Cut, Half cut, Corner Cut			
Interface	USB	USB, Bluetooth	USB, Wi-Fi, LAN, (Able to connect up to 4 devices at 1 time with Simple AP Mode)			
Operating System	Windows, Mac OS		oid (Mobile) Mac OS (PC)			
Power Source		dapter ries (Optional)	AC Adapter			

Professional Label Printer

BUSINESS AND INDUSTRIAL


ELECTRICAL





Punch block labels

RECOMMENDED APPLICATIONS





Heat shrink tube for cable identification



Electrical tools marking labels

DATA CENTRE AND NETWORKING



Cable flag for cable identification

Cable wrap labels



Mix-length labels



Patch panel labels

Pipe marking







Vinyl tape for harsh environment

Vinyl tape for outdoor labelling

Models

LW-Z700FK LW-Z900FK



LW-Z5010BA LABEL

Tape Width	6, 9,12,18, 24 mm	6, 9,12,18, 24, 36 mm	6, 9, 12,1	8, 24, 36, 50 mm	
Print Speed	Up to 30 mm/sec	Up to 35 mm/sec	Up to 50mm/sec (With AC Adapter)	Up to 50mm/sec (With AC Adapter) Up to 35mm/sec (With Rechargeable Battery)	
Print Resolution	180 dpi / 128 dot	360 dpi / 384 dot	300 dpi / 566 dot		
No. of Lines	Up to 8 lines/ PC Dependent	Up to 13 lines/ PC Dependent	PC-based	Standalone mode/ PC-based	
Barcode Printing			Yes		
Lead Waste Margin		4mm (standard tape)); 19mm (specialty tape	e)	
Cutter	Automatic F	ull Cut, Half Cut		Full Cut, Half Cut ceable Cutter)	
Interface	ι	JSB	USB, Ethernet,	Wi-Fi, Simple AP mode	
Operating System	Wir	ndows	Window	rs, Android, iOS	
Power Source	Li-ior	Adapter n Battery eries (Optional)	AC Adapter	AC Adapter Li-ion Battery	

APPS / SOFTWARES FOR LABELWORKS



Epson Home & Craft Label

Perfect for creating decorative and personalised labels with more than 800 symbols, 30 frames, 10 recommended templates and unique text fonts.



ut Singlet 45	3.41 PM	• 92% •	all Single (45	3.43.PM	• 93% •	will Singhel 45	3.42.84	92%
< Back	Print Setting		Cancel	Signs	Done	Cancel	Frame	Dor
Printer		>)Part	y! 🤇)Part	y! 🔇
Margins		indeed Minimum	Cra	ft/Decorativ	e▼		Decorative	
Tape Cut		01 01	- C	n C				
Copies	1 [- +		~~		100 E		
Density	0 (- +	sites 1	to L		6		-
Tape Feed		0.4	Service of	**				Ð
			44	出旨	100	1		-
Tape Feed an	d Cut	0.20	00	e e	ALLER C	<u>د</u>		_
				38		and a		Bund
			Ĵ.	101		一 一 一 一 一 一 一 一 一 一 一 一 一 一 一 一 一 一 一		Š.
			~~~ @		BICWIJ	Oren		-

Supported Models LW-C410 / LW-600P

Supported Devices Android, iOS



Epson iLabel

Easy to create, edit, share and print quality labels wirelessly from your mobile devices with more than 100 pre-designed templates, 400 symbols, QR Codes and 8 types of bar-codes.



Supported Models

LW-C410 / LW-600P / LW-1000P / LW-Z5000WA / LW-Z5010BA

Supported Device Android / iOS / OS X

Supported Models

Supported Devices Android, iOS

LW-600P / LW-1000P /

LW-Z5000WA / LW-Z5010BA



Epson Datacom

Specially designed for IT professionals or electricians in creating labels for networking and wiring installations.

Deploy your labelling solution easily across the network infrastructure equipment including patch panel, cable wrap, face plate, cable flag and more.



Label

Epson Label Editor

Great for creating custom labels for filing, storage, equipment, cable, wire management, workplace safety & compliance signs with 930 professional symbols, and more than 70 pre-installed templates, QR codes and bar-codes.



Supported Models

LW-700 / LW-C410 / LW-600P / LW-1000P/ LW-Z700FK / LW-Z900FK / LW-Z5000WA* / LW-Z5010BA*

Supported Device

Windows, Mac OS

* Support Windows OS device only.

LabelWorks Tape

CARTRIDGE ADVANTAGE & TECHNOLOGY



 * Lead waste margin can be minimised as low as 4mm for some models.

Designed to maximise your tape labels and reduce tape wastage with one of the smallest lead waste margin, you will get more value with every roll of tape.

High Durability


What differs most from the competitors' is that almost no parts of tape or ink ribbon are exposed in Epson cartridges. This unique mechanical design eliminates tape or ribbon jams and damage when loading a cartridge onto the printer.

Longer Tape Length

Print more labels with LK tapes length of up to 9m per tape cartridge *.

Epson LK tapes





Competitors' tapes



• Up to 8 meters per tape cartridge

* For standard PET tape only.





Vinyl Tape

Width of


up to 50mm



Bulk Roll Length of up to 45m

LW Tape Technology

- All Epson LK Tapes comes in 2 types: The Vinyl Tape and the Standard Polyethylene Terephthalate (PET) Tape.
- Epson LK Vinyl label comes with stronger adhesive for extra durability, best suited for harsh environment usage.
- Epson LK PET label structure offers excellent durability, flexibility and optimal thickness without relying on laminated finishes.

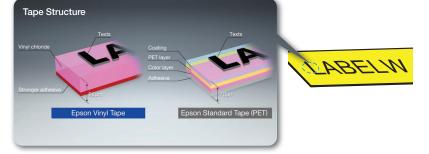

Strong Adhesion

- This is an experiment to check the adhesion of tape on different surface material and condition.
- The testing result shows there is no separation/ peeling of the 12mm standard tape in 7 different conditions in the room temperature of 20°C to 25°C for 2 weeks.

Tape type	Surface Condition	PE	PP	POM	PS	PA	PC	ABS
Standard	Smooth	٠	•	•	•	•	•	•
	Textured	٠	•	•	•	•	•	•
	PE: Polyethylene PP: Polypropylene POM: Polyoxymethylene PS: Polystyrene PA: Polyamide PC: Polycarbonate ABS: Acrylonitrile Butadiene Styrene							

LabelWorks Tape EXCELLENT DURABILITY

Temperature Resistance

The test was conducted to confirm the condition of each tape material when exposed to various temperature conditions.

Test A: 100°C for 240 hours Test B: 200°C for 2 hours

Topo trao	Before test	After test			
Tape type	before test	Test A	Test B		
Standard	ABCDEFG-1	ABCDEFG-1	ABCDEFG-1		
Heat shrink tube	ABC	ABC	ABC		
Magnetic	ABCDEF	ABCDEF	ABCDEF		

100°C for 240 hours: no discoloration and deterioration of tape

200°C for 2 hours: there is some tape discoloration yet it is still readable

Water Resistance

The experiment was conducted to test the durability of tape materials when exposed to water in 3 following environment conditions:

- Test A: Exposed to tap water at 40°C for 2 hours
- Test B: Exposed to salt water (5%) at 40°C for 2 hours

Test C: Exposed to tap water at 40°C in humid environment (80%) for 2 hours

Tono tumo	Before test		After test	
Tape type	Belore lest	Test A	Test B	Test C
Standard	ABCDE	ABCDE	ABCDE	ABCDE
Heat shrink tube	ABC	ABC	ABC	ABC
Cable wrap	ABCDE	ABCOE	ABCOE	ABCDE
Magnetic	ABCDEF	ABCDEF	ABCDEF	ABCDEF
All tapes are compl	etely water resistant			

Chemical Resistance

The experiment was conducted to test the durability of tape materials when immersed in various chemicals and solvents for two hours.

Tape type	Toluene	Hexane	Ethanol	Acetone	Mineral spirits	0.1 N Hydrochloric acid	0.1 N Sodium hydroxide	Ethyl acetate	Engine oil
Standard	 Image: A start of the start of	~	~	~	~	 ✓ 	 Image: A start of the start of	×	~
Heat shrink tube	٠	•	~	~	•	 ✓ 	 Image: A start of the start of	•	~
Cable wrap	×	~	~	×	 ✓ 	 ✓ 	 Image: A start of the start of	×	~
Magnetic	×	~	~	×	×	 ✓ 	 Image: A start of the start of	×	~

Tape type

H

Scratch Resistance

The test was conducted to confirm the durability of tape material when rubbed with a plastic eraser and a copper coin:

- **Test A:** Rubbed with a plastic eraser 50 times with a 2kg weight attached to a machine, at a 90° angle
- **Test B:** Rubbed with a copper coin 50 times with a 500g weight by hand, at a 45° angle

Tana tuna	Before test	After test				
Tape type	Belore test	Test A	Test B			
Standard	ABCDEF	ABCDEF	ABCDEF			
Heat shrink tube	ABC	ABC	ABC			
Cable wrap	ABCDEFGHUKLMNOPQRSTU	ABCDEFGHIJKLMNOPORSTU	MacDEFOHIJKLMNOPORSTU			
Magnetic	ABCDEF	ABCDEF	ABCDEF			

After test

Test A

Test B

No abnormalities in text for Plastic Eraser test

Standard and HST tape have slight removal of text for Copper Coin test

Before test

Weather Resistance

The experiment was conducted to test the durability of tapes in outdoor environment. The labels were exposed to the weather resistance testing machine which is equivalent to the condition of average outdoor weather in Japan:

Test A: 55 hours – 1 year outdoor Test B: 110 hours – 2 years outdoor

Standard	ABCD	ABCD	ABC
Heat shrink tube	ABC	ABC	ABC
Cable wrap	ABCDEFGHUKLMNOPQRSTU	ABCDEFGHIJKLMNOPQRSTU	ABCDEFGHIJKLMNOP
Magnetic	ABCD	ABCD	ABCD

1 year: No discoloration or deterioration of all tapes

2 years: Cable wrap tape has slight surface discolouration

LABELWORKS LK TAPE RANGE

LW – PET TAPE – FOR HOME/SOHO/OFFICE/CORPORATE

0-1	Drintered	Description			Tape Width /	Product Code				Tape
Category	Printout	Description	6mm	9mm	12mm	18mm	24mm	36mm	50mm^	Length
									LK-9WBN C53S659501	8m
Common	ABC	Black on White	LK-2WBN C53S652501	LK-3WBN C53S653501	LK-4WBN C53S654501	LK-5WBN C53S655501	LK-6WBN C53S656501	LK-7WBN C53S657501		
Common	ABC	Red on White			LK-4WRN C53S654502					0
	ABC	Blue on White			LK-4WLN C53S654503					9m
	ABC	Black on Green				LK-5GBP C53S655519				
									LK-9YBP C53S659502	8m
Pastel	ABC	Black on Yellow		LK-3YBP C53S653506	LK-4YBP C53S654515	LK-5YBP C53S655514	LK-6YBP C53S656507	LK-7YBP C53S657504		
	ABC	Black on Blue			LK-4LBP C53S654518					
	ABC	Black on Red						LK-7RBP C53S657503		
Vivid	ABC	White on Blue						LK-7LWV C53S657506		
Transparent	ABC	Black on Transparent			LK-4TBN C53S654514	LK-5TBN C53S655512				9m
Metallic	ABC	Black on Metallic Silver			LK-4SBM C53S654506	LK-5SBM C53S655506				
	ABC	Black on Gold			LK-4KBM C53S654507	LK-5KBM C53S655507				
Pattern	ABC	Gray on Polka Dot Pink			LK-4EAY C53S654512					
	ABC	Gray on Blue Check			LK-4CAY C53S654513					
Decorative	ABC	Black on Candy Strip			LK-4EBY C53S654525					
	Z ABC	Black on Happy Motif Rabbits			LK-4HBY C53S654526					
Ribbon	ABC	Black on Gold			LK-4KBK C53S654510					5m
	ABC	Black on Pink			LK-4PBK C53S654511					
Iron-on	ABC	Black on White			LK-4WBQ C53S654508					
Cable wrap [#]	ABC	Black on 1/3 White, 2/3 Clear					LK-6WBC C53S656513	LK-7WBC C53S657511		9m
Magnetic	ABC	Black on White				LK-5WB2 C53S655520	LK-6WB2 C53S656508			1
Magnetic	ABC	Black on Yellow				LK-5YB2 C53S655522	LK-6YB2 C53S656510			1.5m
	Heat Shrink Tube	(HST)			Tape D	iameter				
		· · · · · · · · · · · · · · · · · · ·	3mm	5mm	11mm	14mm	21r	nm*		
Heat Shrink	AD36:01-06	Black on White	LK-4WBA3 C53S654519	LK-4WBA5 C53S654520	LK-6WBA11 C53S656514	LK-6WBA14 C53S656515		VBA21 657512		2.5m
Tube (HST)	FD37	Black on Yellow	LK-4YBA3 C53S654521	LK-4YBA5 C53S654522	LK-6YBA11 C53S656516	LK-6YBA14 C53S656517		(BA21 357513		2.011

All Epson LK Tapes are RoHS compliance. LK transparent tapes are UL 969 compliance. Heat shrink tube tapes are UL 224 compliance.

For LW-1000P, Z700FK, Z900FK, Z5000WA and Z5010BA only.
 For LW-Z900FK only.
 For LW-Z5000WA and LW-Z5010BA only.

LABELWORKS LK TAPE RANGE

LW – VINYL TAPE – FOR BUSINESS & INDUSTRIAL

Features and Benefits

LabelWorks LK Vinyl Label is ideal for outdoor labelling due to its superb resistance against harsh conditions with outstanding durability, flexibility and stronger adhesiveness.

- Durable holding power when applied to curved surface or uneven surface in-door and outdoors
- Withstand heat and cold, excellent resistance to smearing, scratching and edge curl or peel

Technology	Thermal transfer
Colours	White, Yellow
Technology	Semi-gloss
Adhesive Material	Acrylic
Min/ Max Service Temperature	-40°C to 90°C (-40°F to 194°F)

Certifications



Epson vinyl label tape is compliant to UL 969 for indoor usage. Refer to details at www.ul.com under file MH49716, Vol 1

Epson polyester film label is compliant to RoHS Standard to directive (2011/65/EU) and (Annex II (EU) 2015/863) established on June 8, 2011)

Label Durability*

-40°C to 90°C (-40°F to 194°F) **Recommended Application Temperature:** 15°C (59°F) or more

Storage Conditions:

Temperature Exposure

Service Temperature range:

From -10°C to 40°C (15°F to 104°F) and 30% to 80% RH

Weather Resistance Standard vinyl label:

No visible effects on material up to 2500 hours acceleration test using metaling weather simulator machine (SUGA M6T) Vinyl self-laminating cable wrap label:

No visible effects on material after 390 hours in 40W Xenon Weather Meter.

Wide Variety of Sizes and Colours

ONE MATERIAL. TWO TYPES OF LABEL





Chemical Resistance Resistant to certain

chemicals such as Engine oil, Ethanol, Gasoline, Chloride, 0.1N Hydrochloric acid and more.

Target Usage

LabelWorks LK Vinyl Label is perfect for Indoor/ Outdoor labelling with high weather resistance and adhesiveness.



Indoor Identification Labelling Shelving, electric meters, gas meters, heavy equipment, storage.



Outdoor Mailboxes, bulk bins, metal signs, vehicles.



Cable Labelling Cable flag, cable wrap, wire marking.

LabelWorks LK Vinyl Self-Laminating Cable Wrap Label

is strong and long-lasting, and can be applied on uneven or curved surfaces, perfect for Cable ID labelling. It also provides excellent flexibility, anti wrinkling and superb resistance to smearing, scratching, fading and peeling.





UV Light Resistance

No visible effect, no peeling, cracking, discolouration, or printing/ text removal under testing condition: irradiate 40W/m2, B.P.T. 63°C and 50% RH for 390 hours, in Super Xenon Weather Meter (SUGA SX75).



Abrasion Resistance

- 50 cycles of 500gf pressure by copper coin No visible effect
- 50 cycles of 2kgf pressure by plastic eraser [No visible effect]
- Testing was done by third party. For more details on each type of label, please request for Epson LabelWorks Tape Technical Data Sheet.

Туре	Black on White	Black on Yellow	Width (mm)	Length (M)
	LK-4WBVN	LK-4YBVN	12	7
Standard	LK-5WBVN	LK-5YBVN	18	7
	LK-6WBVN	LK-6YBVN	24	7
	LK-7WBVN	LK-7YBVN	36	7
	LK-9WBVN	LK-9YBVN	50	7
Self-laminating	LK-6WBVS	NA	24	8
cable wrap**	LK-7WBVS	NA	36	8

** For I W-1000P, 7700FK, 7900FK, 75000WA and 75010BA only

SPECIFICATIONS LABELWORKS LW-K200/K400/700/C410/600P



MODEL NUMBER		LW-K200	LW-K400	LW-700	LW-C410	LW-600P	Dimensions & We		
Description		Basic handheld model that can print-on-the-go.	Standalone handheld model that can print bar-code and cable flag.	Standalone desktop model or connect to PC for database printing.	Customise labels with smart device and print wireless via Bluetooth technology.	Customise labels with smart device and print wirelessly via Bluetooth technology.	LW-K200 Weight: 0.42kg (0		
Таре			·	- '	.1	·'			
Width		6, 9, 12 mm	6, 9, 12, 18 mm	6, 9, 12, 18, 24 mm	6, 9, 12, 18 mm	6, 9, 12, 18, 24 mm	145mm (5.7		
Таре Туре		LK Tape Cartridges		- /	/		LW-K400 Weight: 0.41kg (0		
Hardware									
Printing	Cutter Type	Manual Full Cut		Automatic Full Cut					
	Printing Technology	Thermal Transfer		- `					
	Printing Resolution	180 dpi / 64 dot		180 dpi / 128 dot	180 dpi / 96 dots	180 dpi / 128 dot	110mm (4.3")		
Text Data	Printable Lines	Up to 2 lines	Up to 4 lines	Up to 8 lines	PC / App Dependent	· ·	LW-700		
Memory	Files (Built-in Memory)	30	50	PC Dependent	PC / App Dependent		Weight: 0.77kg (1		
Print Setting	Repeat Printing	Up to 9 copies		Up to 99 copies (App) / 999 copies (PC)	Up to 99 (App)	Up to 99 (App) / 999 copies (PC)			
	Print Margin	1mm	1mm	Minimum 1mm (PC/App Dependent)	Minimum 2mm (PC/App Dependent)	Minimum 1mm (PC/App Dependent)	235mm (9.2")		
	Lead Waste	10mm		Minimum 10mm (PC/App Dependent)	Minimum 12mm (App E	Weight: 0.41kg (0			
Fonts									
Character Settings Font Sizes		6		7 / PC Dependent	endent 6 (App) / PC Dependent		*		
Print Modes							54mm (2.13"		
Vertical Printing		Yes			Yes*		LW-600P Weight: 0.44kg (0		
Mirror Printing		Yes		N/A	Yes**				
Barcode Printing		N/A	Yes		Yes**				
Wire Wrap (HST)		N/A Yes		Yes*					
Cable Wrap^		N/A							
Flag Style (Double-sided)		N/A Yes			Yes*		© 2021 Epson Sin Reproduction in pa		
Double-side Tab		N/A Yes			Yes*				
Image Printing		N/A		Yes* Yes**			EPSON and EXCE trademarks of Seik		
Database Printing		N/A		Yes*			All other products a used herein are for		
PC Connection							are the trademarks respective owners.		
Interface		N/A			Bluetooth USB, Bluetooth		Epson disclaims ar samples shown are and product availa		
Operating System		N/A		Windows, Mac OS	iOS, Android (Mobile) Windows (PC) Window	vs, Mac OS (PC)	notice and may va with local Epson of Apple, iPad and iP		
Battery		6AAA (Optional)	6AA (Optional)				registered in the U. a service mark of A		
AC Adapter		N/A	Bundled		N/A	Bundled	Android is a traden		

-700 •**ight:** 0.77kg (1.69lb) . 180mm (7.0") 35mm (9.2") -C410 ight: 0.41kg (0.9lb) 145mm (5.71")

134mm (5.28") 54mm (2.13")

/-600P eight: 0.44kg (0.97lb)



2021 Epson Singapore Pte Ltd. All Rights Reserved. production in part or in whole, without the written mission from Epson, is strictly prohibited. SON and EXCEED YOUR VISION are registered demarks of Seiko Epson Corporation.

other products names and other company names d herein are for identification purposes only and the trademarks or registered trademarks of their pective owners.

son disclaims any and all rights in those marks. Print mples shown are simulations only. Specifications d product availability are subject to change without tice and may vary between countries. Please check h local Epson offices for more information.

ple, iPad and iPhone are trademarks of Apple Inc., jstered in the U.S. and other countries. App Store is ervice mark of Apple Inc.

droid is a trademark of Google Inc.

Information correct as at April 2021

* Via Label Editor **

Via Label Editor or iLabel Using Self-Laminated Cable Wrap Tape

\$ 55mm (2.2") 150mm (5.9") 145mm (5.7") **/-K400** eight: 0.41kg (0.9lb) 56mm (2.2") 170mm (6.7") ~)mm (4.3")



SPECIFICATIONS LABELWORKS LW-1000P/Z700FK/Z900FK/Z5000WA/Z5010BA



MODEL NUMBER	ł	LW-1000P	LW-Z700FK	LW-Z900FK	LW-Z5000WA	LW-Z5010BA	Dimensions & Weight	
Description		Professional wireless model allows sharing across work-groups through widest range of connectivity.	Affordable high-end industrial hands-free model with PC template transfer.	Fast and high quality industrial label printing, accept widest media to boost productivity.	Ideal for both business and industrial usages. Tackles high-volume label printing with more cost savings when using BR Bulk roll label.	Ideal for both business and industrial usages. Increase labelling efficiency with colour LCD touch panel and a built-in keyboard.	LW-1000P Weight: 1.08kg (2.38lb) 139mm (5.47") 123mm (4.84")	
Таре			·	· ·		·	LW-Z700FK Weight: 1.11kg/ 2.21lb	
Width		6, 9, 12, 18, 24, 36 mm	6, 9, 12, 18, 24 mm	6, 9, 12, 18, 24, 36 mm	6, 9, 12, 18, 24, 36, 50) mm	↓ 90mm (3.6")	
Таре Туре		LK Tape Cartridges			LK Tape Cartridge, BR Label Roll Kit (Ribb	on included)	298mm (11.8")	
Hardware							136mm (5.4")	
Printing Cutter Type		Automatic Full Cut, Half Cut, Corner Cut	Automatic Full Cut, Half Cut		Automatic Full Cut, Half Cut (Replaceable Cutter)		LW-2900FK Weight: 1.25kg (2.75lb)	
	Printing Technology	Thermal Transfer				↓ 97mm (3.8*)		
Printing Resolution		360 dpi / 384 dot	180 dpi / 128 dot	360 dpi / 384 dot	300 dpi / 566 dot			
Text Data	Printable Lines	PC / App Dependent	8 lines / PC Dependent	13 lines / PC Dependent	PC Dependent	Standalone mode / PC Dependent	295mm (11.6") 136mm (5.4")	
Memory	Files (Built-in Memory)	PC / App Dependent	100 files / PC Depend	lent	PC Dependent	100 files / PC Dependent	LW-25000WA Weight: 2.9kg (6.39lb)	
Print Setting	Repeat Printing	Up to 99 (App) / 999 (PC)	Up to 99 / 999 copies (PC)		Yes		144mm (5.66")	
	Print Margin	Minimum 1mm (PC/App	Pependent)					
	Lead Waste	10mm	4mm^ (standard label) / 19mm (specialty label)				193mm (7.59") 198mm (7.79")	
Fonts			·					
Character Settings	Font Sizes	PC Dependent	7	13	PC Dependent	Keypad / PC Dependent	LW-Z5010BA Weight: Approx. 3.2kg (6.39 lb)	
Print Modes							LABEI	
Vertical Printing		Yes*		Yes				
Mirror Printing		Yes**		Yes			153mm (6.02")	
Barcode Printing		Yes**	Yes				198mm (7.79")	
Wire Wrap (HST)		Yes**	Yes*		Yes***		193mm (7.59")	
Cable Wrap#		N/A	Yes					
Flag Style (Double-sid	led)	Yes*	Yes				© 2021 Epson Singapore Pte Ltd. All Rights Reserved.	
Double-side Tab		Yes*	Yes		Yes*		Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.	
Image Printing		Yes**	Yes				EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.	
Database Printing		Yes*	Yes**		Yes*		All other products names and other company names used herein are for identification purposes only and	
PC Connection							are the trademarks or registered trademarks of their respective owners.	
Interface		USB, Wi-Fi, LAN	USB		USB 2.0, Ethernet, Wi-	Fi, Simple AP mode	Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without	
Operating System		iOS, Android, Windows, Mac OS (PC)	Windows		iOS, Android, Windows		and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information. Apple, iPad and iPhone are trademarks of Apple Inc.,	
Battery		N/A	Li-ion Battery (Bundle	d) / 6AA (Optional)	N/A	Li-ion Battery (Bundled)	registered in the U.S. and other countries. App Store is a service mark of Apple Inc.	
AC Adapter		Bundled			•		Android is a trademark of Google Inc.	

* Via Label Editor

** Via Label Editor or iLabel

*** Via Label Editor or Datacom

If print margin of label is set to 1mm, - A 4mm lead waste will be ejected when Half-cut function is switched on and a 19mm lead waste will be ejected when Half-cut function is switched off. - For specialty labels (HST tube, cable wrap and magnetic), a 19mm lead waste will be ejected because Half-cut function is not available for such labels.

* Using Self-Laminated Cable Wrap Tape

Information correct as at April 2021