


DELIVER HIGH QUALITY COLOUR LABELS ON-DEMAND.



On-demand colour label printing with high efficiency at reduced costs.

Equipped with new and improved PrecisionCore Micro TFP printheads, Epson's C4050 colour label printer is the perfect solution for industrial, F&B, warehousing, medical and other labelling applications. With increased efficiency thanks to its speedy print of up to 100mm per second, the durable C4050 delivers vivid, high quality, and high-resolution on-demand colour labels whenever you need them.

Remember, **it's in the details.** Find out more at epson.com.sg/colorworks

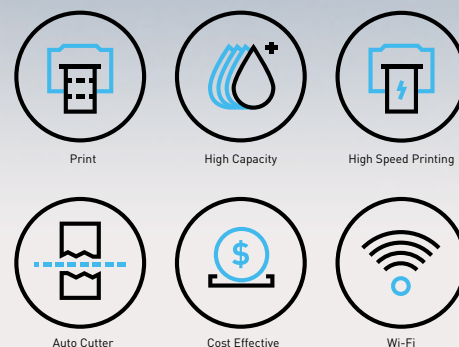

EPSON ULTRACHROME
DL INK

PRECISIONCORE
PRINthead

High Resolution Printing

Vivid and crisp label printing at 1200x1200dpi with improved PrecisionCore Micro TFP printheads.

Efficiency & Versatility

Prints on a wide variety of media at a speed of up to 100mm per second with increased ink capacity to reduce downtime.

Better Inventory Management

Save up to 50% on labelling costs without needing to stock up on different types of pre-printed labels.



Epson's new and improved ColorWorks C4050 allows on-demand colour label printing, reducing labelling costs with paper-saving and ink-saving functionality. Producing superior label quality at 1200x1200 dpi with the innovative PrecisionCore Micro TFP printheads, it is the perfect solution for various labelling applications in industries such as F&B, medical, logistics, and more.

Advanced Printhead

Using Epson's innovative industry-leading Micro TFP technology, the ColorWorks C4050 is equipped with the enhanced PrecisionCore Micro TFP printheads, delivering accurate and vibrant prints. With high-speed printing of up to 100mm per second, you can rely on the C4050 for all your labelling needs, including small text, graphics, and barcodes.



On-Demand Colour Label Printing

Designed to meet high-mix, low-volume applications, the C4050 allows you to print multiple label variations swiftly, improving product identification and productivity. Print brilliant and sharp colour codes, images and pictograms to highlight relevant information, especially for industries that demand precise labelling.



Improved Performance

Compact and durable, the C4050 label printer is user-friendly and easy to operate. Equipped with Wi-Fi option, operators can connect directly to their mobile devices, sending labels to print seamlessly. Using the 2.7" Colour LCD screen, users can easily check on the print status and ink levels, reducing downtime.



2.7" Colour LCD



Convenient Paper Load




External Rear Feed

Print Width	108 mm
Print Resolution	Up to 1200 x 1200 dpi
Speed	Up to 100 mm/sec
Paper Feed	Internal roll or external rear feed
Ink Cartridge	UltraChrome DL Ink C, M, Y, BK, (MK*)

Superior Print Quality


Together with the UltraChrome DL pigment inks and advanced PrecisionCore Micro TFP printheads, the ColorWorks C4050 ensures labels are delivered in crisp and intense text and barcodes, as well as clear and vibrant graphics. The prints are also quick drying and durable, and are fade, smudge and water-resistant.

Epson pigment ink



Epson pigment ink is not water soluble and firmly binds to media fibers, resisting water and other moisture.

Dye-based ink



Conventional dye-based ink is water soluble so printouts can be negatively affected by water and other moisture.

With the auto nozzle check system, the sensors are able to detect clogs and quickly clean the nozzles automatically so you can enjoy a fuss-free printhead maintenance, ensuring high quality and reliable prints every time.




Without Auto Nozzle check system




With Auto Nozzle check system

Wide Variety of Media

Print on a wide range of media, from plain, synthetic, matte to glossy stock, the C4050 ensures high-resolution and rich labels, giving you sharp graphics. The label printer can also handle roll, fanfold, die cut or continuous label media.



Premium matte ticket



High gloss label



Premium matte label



PE matte label

Colour Matching

Spot matching function and colour matching functionality (ICC profile and spot colour matching tool) aids in delivering spectacular and impactful prints.



Epson SD-10 Digital Colour Spectrophotometer



Ease-of-Operation and Maintenance

Supporting all major labelling software, the C4050 has an added Mac/Linux driver with WebConfig support. Easy installation and maintenance allow operators to monitor ink supply levels on the 2.7" colour LCD display. Equipped with a user-replaceable auto cutter unit and Epson Device Admin support, businesses can reduce downtime and minimise operational delays.



Epson Device Admin



Increased Ink Capacity

With individual CMYK* cartridges, you only need to replace each colour as it is used up. This means no wastage of ink and the ability to print large volumes continuously for greater savings and reduced production time. The addition of matte black ink increases the range of colour customers can reproduce.



*Option to use Matte Black Ink (MK) or Gloss Black Ink (BK). Usage of these two inks depends on the application and media type used. Please note that ink configuration is fixed upon purchase and cannot be switched to another ink set.

SPECIFICATIONS

MODEL NUMBER	C4050		
SKU Number	C31CK03106		
Print Technology	Serial Inkjet PrecisionCore TFP with Nozzle Verification Technology		
Technology	Serial Inkjet PrecisionCore TFP with Nozzle Verification Technology		
Colour	Four-colour printing, individual ink cartridge		
Ink	UltraChrome DL pigment ink: C, M, Y, K, (MK ²)		
Ink Cartridge			
Colour (Pigment Ink)	Cyan, Magenta, Yellow, Black, Matte Black ²		
Model	SJIC46P(C), SJIC46P(M), SJIC46P(Y), SJIC46P(BK), SJIC46P(MK)		
Print Resolution	Up to 1,200 × 1,200 dpi		
Printing Width	Max. 108mm		
Print Speed	Max. Speed (300x600dpi): 100mm/sec Max. Speed for Glossy Media (600x600dpi): 48mm/sec ² when printing 101.6mm Width		
Interfaces	Hi-Speed USB 2.0 and Ethernet (100BASE-TX / 10BASE-T) [Use of Optional product OT-WL06]		
Barcode Font	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), Code39, ITF, Codabar, Code93,		
(Printer Driver Built-in)	Code128, GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded		
Two Dimensional Symbols	PDF417, QR Code, Maxi Code, GS1 DataBar Stacked, GS1 DataBar Stacked Omnidirectional, GS1 DataBar Expanded Stacked, DataMatrix, Aztec Code, MicroPDF417, Micro QR Code		
Media Source	Roll-fed, Fanfold		
Media Types	Plain, Matte, Textured, Synthetic, Glossy, High glossy, Wristband		
Paper Specifications³			
Media Form	Label Width	Backing Paper Width	Label Thickness
Roll	21.4 – 108 mm	25.4 – 112 mm	0.08 – 0.24 mm
Fanfold	46 – 108 mm	50 – 112 mm	0.08 – 0.24 mm
External Roll Diameter	Max. 101.6 mm		
Winding Direction	Face Out		
Paper Core Diameter	Plain Label, Matte Label, Synthetic Label: min. 44.1mm Glossy Label, Wristband: min. 56.8mm		
Number Of Folds	Fanfold Paper: 500 or Less		
Winding Direction	Face Out		
Temperature / Humidity			
Printing	5 – 35°C / 20 – 80% RH; Barcode Printing: 15 – 35°C / 20 – 80% RH		
Storage	When Packed (Ink not charged): -20 - 60°C / 5 - 85% RH (Without Condensation)		
Overall Dimensions (D x W x H)	283 x 310 x 285 mm		
Mass	Approx. 13.0 kg		
Power Supply	Dedicated AC Adapter		
Power Consumption			
Printing	Approx. 28.2W		
Standby	Approx. 2.6W		
Rated Voltage	AC 100 – 240 V		
Rated Frequency	50 – 60 Hz		
EMC Standards	Europe: CE Marking North America: FCC Class A, CAN ICES-3 (A)/NMB-3 (A) Oceania: Radiocommunications (Electromagnetic Compatibility) Standard, Class A		
Safety Standards	Safety Smark (Singapore)		

*1 Option to use Matte Black Ink (MK) or Gloss Black Ink (BK). Usage of these 2 inks depends on application and media type used.

*2 When printing 101.6mm width.

*3 For detail paper specifications, please refer to the printer's manual.

Usage Restrictions:

When this product is used for applications requiring high reliability / safety such as transportation devices related to aviation, rail, marine, automotive etc.; disaster prevention devices; various safety device etc; or functional / precision device etc, you should use this product only after giving consideration by inclusion of fail-safes and redundancies into your design to maintain safety and total system reliability. Because this product was not intended for use in applications requiring extremely high reliability / safety such as aerospace equipment, main communication equipment, nuclear power control equipment, or medical equipment related to direct medical care etc, please make your own judgment on this product's suitability after full evaluation.

Epson ColorWorks ink is not intended for direct food contact.

Dimensions & Weight

C4050

Weight: Approx. 13kg



Consumables

C13T52R100 Ink Cartridge Black	SJIC46P-BK
C13T52R200 Ink Cartridge Cyan	SJIC46P-C
C13T52R300 Ink Cartridge Magenta	SJIC46P-M
C13T52R400 Ink Cartridge Yellow	SJIC46P-Y
C13T52R500 Ink Cartridge Matte Black	SJIC46P-MK
C33S021601 Maintenance Box	SJMB4000

Options

C32C882101 Paper Tray	OT-PT40
C32C882201 Auto Cutter Unit	OT-CU40
C32C891328 Wireless LAN Set	OT-WL06-328

©2022 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Print samples shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing
Printed May 2022

Epson (Thailand) Co.,Ltd.

Puun Tower, 22nd Floor
1152 Rama 4 Road, Klong Toei, Klong Toei, Bangkok 10110

Contact Us

✉ : support@eth.epson.co.th
📞 : Epson Thailand
☎ : 02-460-9699

Follow Us



More Details

