#### LARGE FORMAT PHOTO PRINTERS

SURECOLOR SC-P5330/P6000/P6530E/P6530D/P7530/ P8000/P8530D/P8530DL/P8530DM/P9530/P20070





#### Impeccable print quality in spectacular accuracy with Epson's P-series printers.

When you require exemplary prints that are top-class in quality, precision, and colour accuracy, trust Epson's P-series printers to weave their magic and deliver just what you need. Equipped with Epson's proprietary PrecisionCore™ MicroTFP printheads, the SureColor P-Series photographic printers revel in their precise and reliable print productivity. Coupled with colour-accurate reproduction using genuine UltraChrome PRO 6 inks, you can now get gallery-quality picturesque prints easily and efficiently.

#### ENGINEERED FOR GOOD









#### Highest Standards in Print

The additional grey ink in the UltraChrome PRO 6 inks offers smooth and natural colour gradation in every print.

#### Installation Flexibility

Flat top design allows for easy placement of printer in challenging and narrow spaces, giving businesses more options in installation.

#### **Boosted Efficiency**

Improved print speeds and continuous automatic printing with dual rollers' help ensure high productivity with minimal downtime.

**EPSON** 


## **Experience the Magic**

Epson SureColor P-series photographic printers deliver superior detail-accurate images thanks to the latest colour printing technologies. With Epson's PrecisionCore™ Thin Film Piezo (TFP) printhead and UltraChrome™ all-pigment ink sets, uncompromising image consistency and immaculate colour quality are evident in every print. The P-series printers are integrated with industry-leading software solutions, which create seamless work processes that increase efficiency for businesses while meeting the demanding needs of the photo, proofing and graphic arts industry.

#### **Unmatched Precision**



Epson's PrecisionCore<sup>™</sup> technology delivers unparalleled colourmatching capability in every print, enabling ultra-precise control of dot size, shape and placements with its revolutionary printhead. The print nozzles can also produce a wide variety of droplet sizes, allowing fine detail and quick filling of larger areas at a single pass.

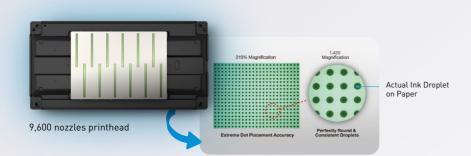












## Latest Generation of Professional-Quality Pigment Inks

Epson's revolutionary Ultrachrome HD inks ensure colouraccurate prints, delivering stunning vibrancy in every photo. With the new addition of Photo Black and Matte Black inks, images are printed with greater colour depth; especially when printing black and white images. In addition, the improved black density and higher D-Max value, the new black ink is 1.5 times denser than the previous ink formulation, providing significant improvements to the overall contrast ratio and optical clarity.

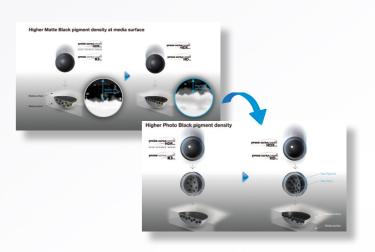





SC-P8530D/P8530DL/P8530DM

### **Photographic Perfection and Accuracy**



#### Unparalleled 99% PANTONE Coverage

Utilising a three-level black ink technology that simultaneously employs Black, Light Black and Light Light Black, the innovative Epson UltraChrome pigment inks produce brilliant black density and grey balance in sharp definition. On the media surface, the UltraChrome HDX, HD matte, and photo black inks achieve a much higher pigment density, making sure that the pigments do not penetrate too deep when printing on third-party media.

With the newly-added Violet ink, the Ultrachrome HDX ink achieves a wider colour gamut, allowing it to hit spot and client-specific colours accurately, achieving an unparalleled 99% max certified PANTONE coverage. The various ink configurations also aid in achieving impeccable print quality for both colour and monochrome reproductions.

^For selected models


#### **Epson AccuPhoto HDR Screening**



- Wider colour coverage with vivid colour reproduction
- Less chance to print monochrome images



 Wider colour coverage with detailed reproduction of dark-colour tonal gradations



 Decent (more than 4-colour colour coverage with more detailed reproduction of dark-colour tonal gradations Advanced ten-colour screening algorithm delivering prints with superior colour and clarity, producing extremely fine blends and subtle photographic transitions.


With Epson AccuPhoto HDR Screening, each print contains extremely accurate highlight-toshadow details with no visible photographic graininess.



### **Efficient Workflow Solution**

#### **Epson Colour Calibration Utility**

To work more efficiently across multiple networked printers, the P-series printers are equipped with Epson Colour Calibration Utility, which measures colour density and concentration, allowing printer network management from a central point. This makes calibrating your printers easier and faster as the derivatives can calibrate their colours based on the base printer by transferring the colour chart, increasing overall productivity.

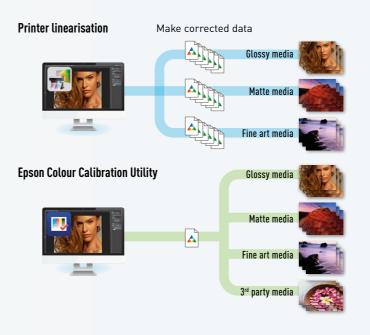

#### **Epson Print Layout Software**


This plug-in for Adobe Photoshop, Lightroom, and Nikon ViewNX-i includes a set of template layouts and supports ICC soft proofing, colour production, preview, custom media registration and panorama layouts. Along with a set of colour modes, including advanced black and white, to create different finishes and moods. The software operates via intuitive and consistent controls including slider bars and colour wheels for precise and easy adjustments.



#### **Epson Cloud Solution PORT**


Managing your printers is made easy and hassle-free with Epson's Cloud Solution PORT. Operators can monitor equipment and printer fleet across different sites from production floor or remotely, on PC or a mobile device without fuss. Boost operational efficiency by controlling, analysing and managing your printer fleet centrally from one intuitive interface while troubleshooting any rare issues.



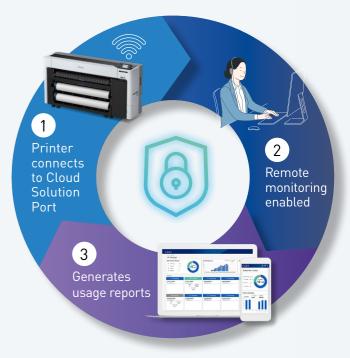





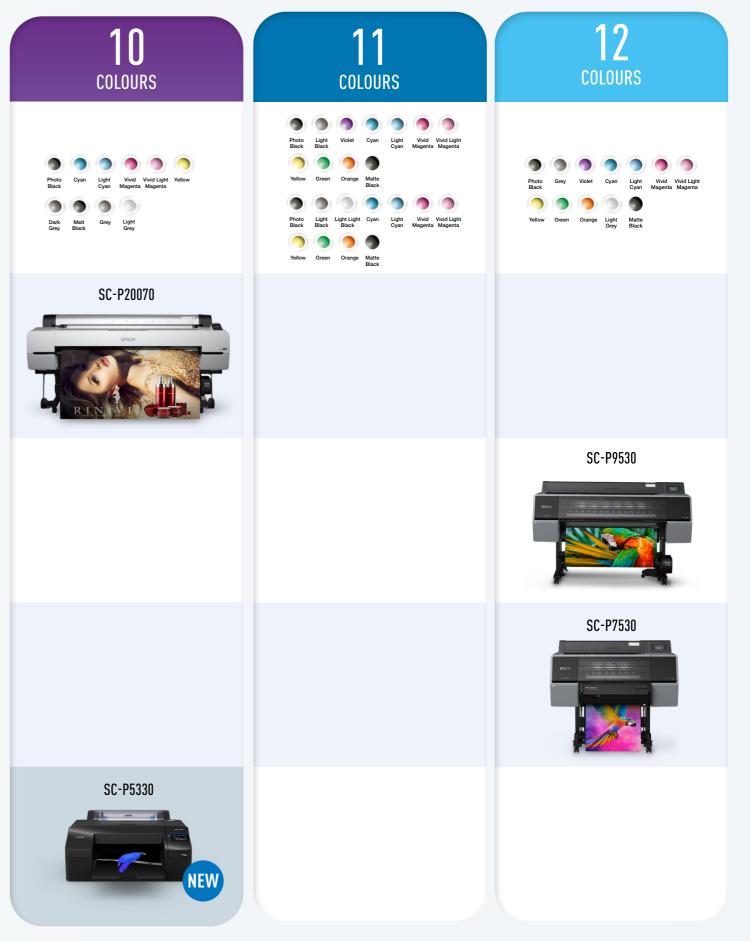

# SERIES

## **Brillance in Every Print**

### SC-P5330



#### **Consistently Vivid**

Experience an upgraded level of image perfection with the SC-P5330, which utilises the UltraChrome™ PRO 10 ink set with Violet for enhanced blue reproduction and a wider colour gamut. This synergises perfectly with the printer's Carbon Black and Black Enhance Overcoat print modes that provide higher levels of black density and increased contrast with smooth gradations.



#### Dedicated Black Ink Channels

Achieve continuous printing with the dedicated Matte Black and Photo Black ink channels.



#### **Convenience Driven**

#### **Epson ColorBase Software**

An easy to use colour calibration tool that meets the demands of photographers and graphic arts professionals, Epson ColorBase provides consistent colour quality throughout the printing process.

Supporting colour calibration from print to print and/ or printer to printer, Epson ColorBase makes print management easy and reliable. It enhances remote printing applications with critical colour calibration requirements and keeps a history of calibration files for easy reference.

#### **Epson Print Layout Software**

With easy access to all major functions, the Epson Print Layout software also helps to manage print layouts and colours with standard bundled industry-leading RIP software. Coupled with high-precision media feed technology, operators are ensured of smooth operation of their printers even when unattended.

#### **Archival Prints**

Standing the test of time, our Fine Art prints revel in its archival properties with colours lasting up to 60 years of light fastness\*.



\*Based on JEITA CP-3901A's standard for the measurement: glossy A4 paper, temperature at  $23^{\circ}\text{C}$  and humidity at 50%.

A compact photo printer that does not compromise on quality, the SC-P5330 is your perfect solution for impeccable colour reproduction in every print. Utilising Epson's Micro Piezo® printhead and UltraChrome™ Pro10 all-pigment ink set, every image is dynamic and vibrant, with detailed consistency in spectacular colours.



# SERIES

### **Unrivalled Colour Accuracy**

#### **Photographic Perfection**

With superior colour and clarity, the SC-P6000 and SC-P8000 produce prints with extremely fine blends and subtle photographic transitions. Regardless of the viewing light source, prints reveal a consistent colour balance and vibrancy. Equipped with the innovative PrecisionCore TFP printhead, precise dot placement accuracy ensures dynamic and crisp reproduction in every image.

#### **Advanced Media Handling and Loading**

Making printing process quicker and simpler, the Epson SC-P6000 and SC-P8000 printers offer:

#### Epson ePlaten™ Technology

Highly accurate automatic media loading and handling with fast, spindle-free roll media support for lower percentage of media damage.



#### **Professional Media Handling**

Compatible with virtually any media type; in roll or cut sheet, up to 24 or 44 inches wide, as well as an accurate loading of cut-sheet media of up to 1.5 mm thick posterboard. Media is front-loaded via a unique straight-through media path. A printer and driver based media identification and synchronisation system provides virtually error-free media use.

#### **Easy Workflow Integration**

#### **Epson Colour Calibration Utility**

Working efficiently across multiple networked printers, the SC-P6000 and SC-P8000 come with Epson Colour Calibration Utility, which measures fleet's colour density and concentration. Operators can manage their printer network from a central point, making printer calibration convenient and hustle-free.

SC-P6000/P8000

#### Ease of Connectivity

Comes with Hi-Speed USB 2.0, Ethernet connectivity and supported by professional Epson photo graphic drivers for Macintosh® and Windows®. The SC-P6000 and SC-P8000 can also be used with most leading third-party software RIPs and workflows.

#### Intelligent High-Capacity Ink System

Pressurised ink cartridge technology ensures ink is reliably delivered at all print speeds while dramatically reducing the physical size of the ink cartridges. The ink cartridges are available in capacity up to 700ml.



**2.7" LCD for Easy Preview** Preview print jobs and ink capacity quickly and conveniently.



Unleash limitless possibilities with the versatile SC-P6000 and SC-P8000, two state-of-the-art printers that incorporate the latest colour printing technologies. Watch images come to life in top-class accuracy and uncompromising image consistency.




Media Width 24"

Media Width

44


SC-P8000

# **Explosion of Vivid Colours With Efficiency and Excellence**

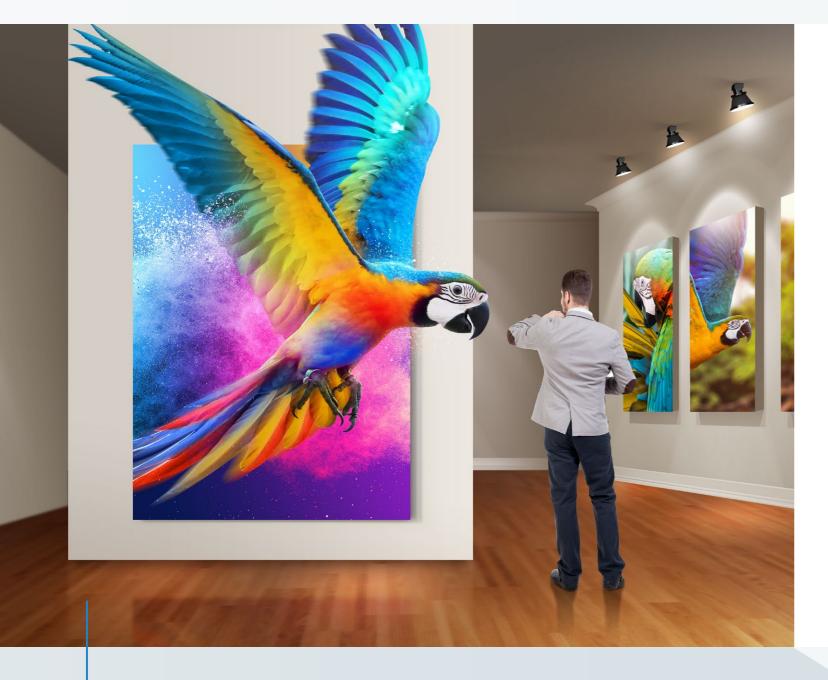

#### **Widest Colour Gamut**

Equipped with Epson's newly-developed UltraChrome PRO 12 inks, the SC-P7530 and SC-P9530 delivers a wide range of colours, reproducing every detail with unrivalled brilliance and accuracy. With the all-new 2.6-inch PrecisionCore MicroTFP printhead, these printers boast a productive workflow with dedicated channels for Matte and Photo Black inks.



Combining efficiency and quality, the SC-P7530 and SC-P9530 are fitted with PrecisionCore MicroTFP printhead, printing at 300dpi resolution with 12 channels. With smoother gradations and accurate texture reproduction, image quality is enhanced by Matte Black, Photo Black and Light Light Black inks, which are achieved through black enhancement overcoating technology.

#### **Wide Range of Applications**

Designed to print with a wide range of applications, professional photographers, fine art reproduction, packaging and contract proofers can now easily print with convenience. Even those that demand the highest print quality can unleash their creative freedom and print on a wide variety of media, including fine art papers, canvases and photo papers, without compromising on quality. The SC-P7530 and SC-P9530 photo printers support printing of up to 44" width media.

SC-P7530/P9530

\*Applicable to SC-P9530 only.



#### **Designed to Last**

Epson's SC-P7530 and SC-P9530 photo printers come with additional features such as a sealed roll media door for a dust-proof design and an integrated LED light to view projects while printing.

Catering to creatives that demand the most outstanding standards in printing, the SC-P7530 and SC-P9530 deliver perfect colour reproduction by leveraging on Epson's new UltraChrome PRO 12 pigment inks and PrecisionCore MicroTFP printhead technology. Ideal for Photo, Fine Art, Graphic Design and Proofing applications, be amazed by the explosion of vibrancy and precision in every print.



Media Width 24"
SC-P7530

Media Width

44

SC-P9530

## **Deliver Top Notch Gallery-quality Prints**



Epson's SureColor SC-P6530E and SC-P6530D employ an unprecedented level of innovative technology. Coupling PrecisionCore™ technology with UltraChrome PRO 6 Inks, high accuracy and resolution can be achieved allowing the finest details to stand out.

## SC-P6530E/P6530D

#### **Accurate Colour Reproduction**

Delivering superb image quality with true-to-life colour accuracy, Epson's UltraChrome PRO 6 inks bring prints to a whole new level of professionalism.

#### **Print That Last**

Epson's UltraChrome PRO 6 inks are water-, smudgeand fade-resistant, allowing prints to be durable and long-lasting.



Water and smudge resistant

#### Fade resistant

#### **Epson Smart Panel**

With the Epson Smart Panel app, users can set up, monitor, print and scan through an iOS or Android device.

Conveniently set up, monitor, print, and scan on your Epson printers and easily commence print jobs from your fingertips. With a wide variety of configuration features, you can also customise the app according to your requirements into an all-in-one management app.



#### Seamless Operation For SC-P6530D only

Operating with top-tier reliability, the Epson SureColor SC-P6530D saves time and manpower with the Automatic Roll switching, simplifying the loading of new media rolls. Minimising downtime, the seamless operation ensures continuous printing and smooth operation.



Automatic Roll-Media Feed Automatic Roll Switch



# SERIES

# Transform Ideas Into Vibrant True-To-Life Prints



### **Gallery Standards**

6-colour ink set delivers exceptionally wide colour gamut and high black density, producing photographic prints that are of gallery standards.





Photographic prints

Black-and-White prints

#### Up to 44" Wide Dual Roll Design

Management of prints is much easier with the dual roll 44" wide-format media configuration that maximises productivity and increases efficiency.



#### **Wide Variety of Media**

Professional printing can be done on a variety of media, such as artist canvas or premium photo papers.

SC-P8530D/DL/DM



Matte media

Gloss media

#### **Smoother Gradation for Professional Perfection**

Utilising the innovative two-level black ink technology that simultaneously employs Photo Black and Matte Black, Epson's UltraChrome PRO 6 inks produce rich true-to-life black density and grey balance to ensure top-notch quality in every print. Generating smooth gradients, transitions, and neutral grayscale in every photo.




Delivering stunning picturesque prints in striking colours, Epson's SC-P8530D/P8530DL/P8530DM transform your ideas into vivid larger-than-life pieces of art with detailed precision. With high installation flexibility and seamless work process, businesses can now increase their productivity effortlessly with Epson's large format photographic printer.



# Prz

## **Unparalleled Vividness and Productivity**

### SC-P20070

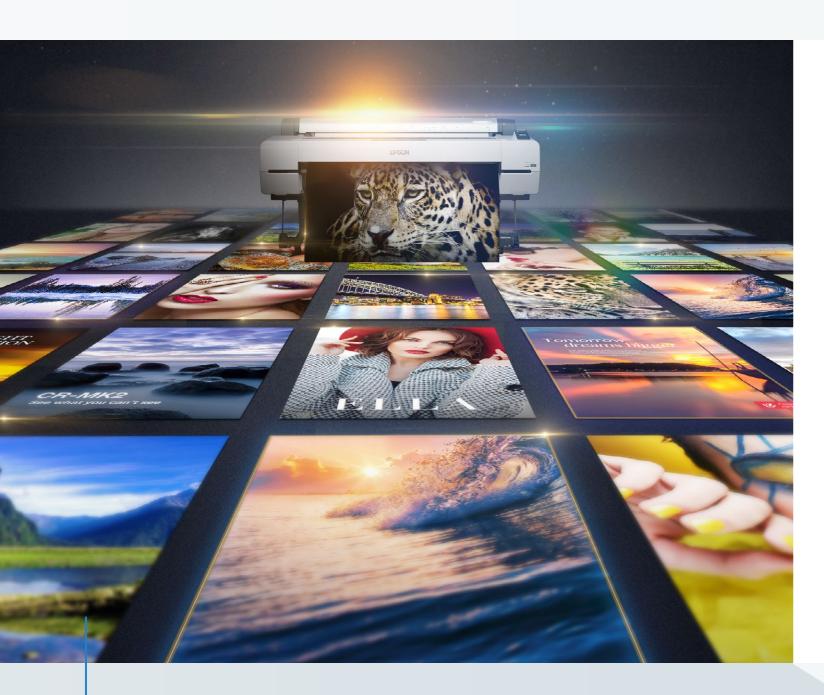

Epson's SC-P20070 photo printer leads the industry with its high performance, reliable and swift printing. Equipped with the revoluntionary PrecisionCore MicroTFP printhead and UltraChrome™ PRO ink, experience magnificence in every print at affordable running costs.

#### State-of-the-Art Standards

**Cost-Effective Production** 

No more worrying about high-volume quality print at fast speeds. Thanks to Epson's UltraChrome PRO archival ink technology and the innovative PrecisionCore MicroTFP, expect remarkably vivid and sharp prints that are gallery standards and last up to 200 years. With four levels of grey, your prints will feature accurate transitions with very low grain even at the fastest print modes.



CORE



Operating with reduced power consumption, businesses stand to gain with the reliable SC-P20070 printer as it requires minimum maintenance. Coming with large, cost-effective ink cartridges of up to 700ml, operators can also take advantage of the various configurations, such as an optional Postscript, Auto Take-Up system, and user selectable warranty and support packages.

#### **Efficiency Secured**

Built to minimise downtime during printing, the SC-P20070 comes with a new media feeding system that can keep up with high-volume prints without compromising on quality. Achieve maximum output with the Realtime Media Adjustment and Feedback System, and Media Inductive Roller System, allowing the printer to operate smoothly even when unattended.



Media feed rollers

Media inductive rollers

#### Range of Media



The SC-P20070 is a floor-standing printer with a 64" (1,626mm) wide carriage and improved flexible media handling, supporting basic bond paper, photo paper, transparent film, translucent back-lit and specialist synthetic media. It also accepts roll media via a spindle mounting with integrated tension adjustment and has a high-speed auto-cutter.



### **Ink & Options Compatibility Chart**

INK VOLUME									200	ml									
INK TYPE / REPLACEMENT UNITS	Maintenance Box	Borderless Maintenance Box	2/3" Dual Roll Feed Spindle	Auto Cutter Spare Blade	Photo Black	Matte Black	Gray	Light Gray	Cyan	Vivid Magenta	Yellow	<ul><li>Light Cyan</li></ul>	Vivid Light Magenta	Violet	Photo Black	Cyan	Vivid Magenta	Yellow	Light Cyan
PRINTERS									T-CODE	: / MOI	DEL NO								
SC-P5330	T55V / C13T619000	T55V / C13T619100	T55V / C12C811251	T55V / C12C815351	T55V / C13T55V100	T55V / C13T55V800	T55V / C13T55V700	T55V / C13T55V900	T55V / C13T55V200	T55V / C13T55V300	T55V / C13T55V400	T55V / C13T55V500	T55V / C13T55V600	T55V / C13T55VD00					
SC-P6000	T6997 / C13T699700														T8241 / C13T824144	T8242 / C13T824244	T8243 / C13T824344	T8244 / C13T824444	T8245 / C13T824544
SC-P6530	T6997 / C13S210116														T8241 / C13T48Y100	T8241/ C13T48Y200	T8241 / C13T48Y300	T8241 / C13T48Y400	
SC-P8000	T6997 / C13T699700														T8241 / C13T824144	T8242 / C13T824244	T8243 / C13T824344	T8244 / C13T824444	T8245 / C13T824544
SC-P8530	T6997 / C13S210116														T8241/ C13T48Y100	T8241 / C13T48Y200	T8241 / C13T48Y300	T8241/ C13T48Y400	
SC-P7530/ SC-P9530	T6997 / C13T699700														T44V1 / C13T44V100	T44V2 / C13T44V200	T44V3 / C13T44V300	T44V4 / C13T44V400	T44V5 / C13T44V500
INK TYPE / REPLACEMENT UNITS	Maintenance Box	Borderless Maintenance Box	Printer Cutter Blade												Photo Black	Cyan	Magenta	Yellow	Matte Black
SC-P20070	T6193 / C13T619300																		
SC-P8530D	S210115/ C13S210115	S210116/ C13S210116	S210117 / C13S210117												T48Y1 / C13T48Y100	T48Y2 / C13T48Y200	T48Y3/ C13T48Y300	T48Y4 / C13T48Y400	T48Y8 / C13T48Y800

3	50r	ทไ											7	00ı	าไ					
<ul><li>Vivid Light Magenta</li></ul>	Light Black	Grey	Matte Black	Light Light Black	• Orange	• Green	Violet	Photo Black	Cyan	Vivid Magenta	Yellow	Light Cyan	<ul><li>Vivid Light Magenta</li></ul>	Light Black	Grey	Matte Black	Light Light Black	Orange	• Green	Violet
									T-COD	E / M0	DEL NO	).								
T8246 / C13T824644	T82 <i>47  </i> C13T824744		T8248 / C13T824844	T8249 / C13T824944	T824A / C13T824A44	T824B / C13T824B44	T824D / C13T824D44	T8041/ C13T804100	T8042 / C13T804200	T8043 / C13T804300	T8044 / C13T804400	T8045/ C13T804500	T8046 / C13T804600	T8047 / C13T804700		T8048 / C13T804800	T8049 / C13T804900	T804A / C13T804A00	T804B / C13T804B00	T804D / C13T804D00
		T8241 / C13T48YE00	T8241 / C13T48Y800					T8041 / C13T48R100	T8041 / C13T48R200	T8041 / C13T48R300	T8041 / C13T48R400				T8041 / C13T48RE00	T8041 / C13T48R800				
T8246 / C13T824644	T8247 / C13T824744		T8248 / C13T824844	T8249 / C13T824944	T824A / C13T824A44	T824B / C13T824B44	T824D / C13T824D44	T8041 / C13T804100	T8042 / C13T804200	T8043 / C13T804300	T8044 / C13T804400	T8045 / C13T804500	T8046 / C13T804600	T8047 / C13T804700		T8048 / C13T804800	T8049 / C13T804900	T804A / C13T804A00	T804B / C13T804B00	T804D / C13T804D00
		T8241/ C13T48YE00	T8241/ C13T48Y800					T8041/ C13T48R100	T8041 / C13T48R200	T8041/ C13T48R300	T8041 / C13T48R400				T8041 / C13T48RE00	T8041 / C13T48R800				
T44V6 / C13T44V600	T44V7 / C13T44V800		T44V8 / C13T44V800	T44V9 / C13T44V900	T44VA / C13T44VA00	T44VB / C13T44VB00	T44VD / C13T44VD00	T44N1 / C13T44N100	T44N2 / C13T44N200	T44N3 / C13T44N300	T44N4 / C13T44N400	T44N5 / C13T44N500	T44N6 / C13T44N600	T44N7 / C13T44N700		T44N8 / C13T44N800	T44N9 / C13T44N900	T44NA / C13T44NA00	T44NB / C13T44NB00	T44ND / C13T44ND00
• Grey								Photo Black	Cyan	<ul><li>Vivid Magenta</li></ul>	Yellow	<ul><li>Light Cyan</li></ul>	<ul><li>Vivid Light Magenta</li></ul>	<ul><li>Dark Grey</li></ul>	Matte Black	• Grey	Light Grey	Magenta		
								T44N1 / C13T44N100	T44N2 / C13T44N200	T44N3 / C13T44N300	T44N4/ C13T44N400	T44N5/ C13T44N500	T44N6/ C13T44N600	T44N7 / C13T44N700	T44N8 / C13T44N800	T44N9 / C13T44N900	T44NA / C13T44NA00			
T48YE/ C13T48YE00								T48R1 / C13T48R100	T48R2 / C13T48R200		T48R4 / C13T48R400				T48R8 / C13T48R800	T48RE/ C13T48RE00		T48R3 / C13T48R300		

#### **SPECIFICATIONS**

MODEL NUMBER	SC-P5330
SKU Number	C11CL14403
Printing Technology	0110211100
Printing Method	On-Demand Inkjet (Pize Electric), Variable-Sized Droplet Technology
Print Head	Micro Piezo Printhead
Nozzle Configuration	1,800 Nozzles (180 Nozzles x 10 Channels x 1 Head)
Black	180 Nozzles (x2)
Colour	180 Nozzles (x8)
Maximum Resolution	5,760 x 1,440 dpi
Minimum Ink Droplet Volume	1.5pl
<b>Printing Specifications</b>	
Print Speed	Draft Mode: 0.5 minutes, Normal Mode (360 x 720dpi): 0.8 minutes
	Fine Mode (720 x 720 dpi): 1.8 minutes
	Super Fine Mode (720 x 720 dpi): 2.5 minutes
Line Accuracy	±0.2% of the specified vector length or ±0.26mm (whichever greater)
Ink System	
Ink Type	Pigment Ink
Ink Brand Name	UltraChrome PRO10 Ink
Colour	Photo Black, Matte Black, Gray, Light Gray, Cyan, Vivid Magenta, Yellow,
	Light Cyan, Vivid Light Magenta, Violet
Ink Capacity	80ml (Bundled) / 200ml
Ink Case	Ink Cartridge
Paper Handling	
Paper Path	Roll, Cut Sheet (manual feed), Poster Board (manual feed), ASF Cassette
Paper Feed Method	Friction Feed (Auto switching between cut sheet and roll paper)
Maximum Roll Diameter*1	2 inch-core: Max φ103 mm / 3 inch-core: Max φ150 mm
Paper Size	20x25cm (8"x10"), A4, Letter, 254x305mm (10"x12"), JIS B4 (257x364mm),
	US B (11x17"), 11x14", A3, A3+, SuperW A3, B3, A2, US C (17"x22")
Paper Thickness	Roll: Roll Paper: 0.08 – 0.50mm
	Manual: Cut Sheet: 0.08 – 08mm, Poster Board: 09 – 1.5mm
	ASF: Cut Sheet: 0.08 – 0.8mm
Maximum Printable Length*2	Roll Paper: 18m, Cut Sheet: 610mm, Poster Board: 610mm
Borderless	8/10/11/14/16/17", A4/A3/A3+/A2, 300 mm: Roll Paper
1050 11 14 01 1	10/14/16/17", A4/A3/A3+, 300 mm: Cut Paper & Poster Board
ASF Capacity: Max. Sheets	ASF Cassette: Plain paper 250 sheets (A4-A2/US-C)
Control Panel	40" O L 10D 0 FL 1 1 1 T 1 0
LCD Screen	4.3" Colour LCD & Electrostatic Touch Screen
Connectivity	0 0
Interface	SuperSpeed USB'3, 10BASE-T/100BASE-TX/IEEE802.11b/g/n/ac
Printer Language	ESC/P raster
Memory System	1GB
Operating System PC Supported OS	Windows 7, 8, 8.1, 10, 11 or later
PC Supported OS	
DC System Requirement	Windows Server 2022, 2019, 2016, 2012R2, 2012, 2008R2, 2008 CPU: Core 2 Duo 3.05GHz or more, Memory: Memory more than 4GB,
PC System Requirement	HDD: Free Space more than 64GB <sup>34</sup>
Mac Supported OS	Mac OS X10.9.5 or later
Mac System Requirement	CPU: Core 2 Duo 3.05GHz or more, Memory: Memory more than 8GB,
Mac System nequirement	HDD: Free Space more than 128GB <sup>*4</sup>
Utility Software	TIDD. Tree opace more than 1200D
Bundled in CD	Windows - Printer Driver - EpsonNet Print - EpsonNet Setup - EpsonNet Config
Barraica iri OB	SE - Epson Manual Launcher - Epson Print Layout - Epson Edge Dashboard -
	Epson Media Installer - Epson ColorBase3 - Epson Device Admin - Device Status
	System (DSS) - EPSON SureLab Order Controller
	Mac - Printer Driver - Firmware Update - EpsonNet Config SE - Epson Manual
	Launcher - Epson Print Layout
Web Delivery	Windows - Installer Package (Install Navi) - Web Installer - Software Updater -
VVCD Delivery	Firmware Updater - Adobe ICC Profile - LFP Accounting Tool
	Mac - Installer Package - Web Installer - Software Updater - Firmware Updater -
	Uninstaller
Electrical Specifications	Of in lotality
Voltage	AC 100 – 240V, 50/60Hz
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A
Power Consumption	Operating: Approx. 42W, Ready: Approx. 17W,
. cor concamption	Sleep: Approx. 2.4W, Standby: Approx. 0.2W
Environmental Conditions	GIOGETT STORE EL TITTS GERMANDS TY POPI ON CILTY
Temperature	Operating: 10°C to 35°C / Storage: -20°C to 40°C
Humidity	Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation
Dimensions & Weight	2 - 5 - 2 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3
	863 x 405 x 1,134 mm
Dimension (W x H x D) Weight	863 x 405 x 1,134 mm Approx. 53 kg

**Dimensions and Weight** 

SC-P5330 Weight: Approx. 53 kg



#### WHAT'S IN THE BOX

- Printer
- Initial ink cartridge (80ml)
- AC power cable
- Setup guide
- Maintenance boxBorderless maintenance box
- Paper casette cover
- Roll feed spindle
- · Borderless printing spacer

#### **OPTIONS**

Roll Feed Spindle (17")

©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is a registered trademark of Seiko Epson

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations.
The actual product design and contents may vary.
Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing. Printed April 2024

#### **SPECIFICATIONS**

**Dimensions & Weight** 

Dimension (W x H x D)

Weight

MODEL NUMBER	SC-P6000	SC-P8000	Dimensions and Weig	ght
SKU Number	C11CE41403	C11CE42403	SC-P6000	
Printing Technology		0110212100	Weight: Approx. 101 k	'n
Printing Method	PrecisionCore Inkjet Technology, Variable	e-Sized Droplet Technology	Weight. Applox. 101 K	9
Print Head	PrecisionCore TFP Printhead	O Olzed Bropiet Teermology		
Nozzle Configuration	360 Nozzles		_	
Black	360 Nozzles (x3)			
				1,218mm
Colour	360 Nozzles (x5)			
Maximum Resolution	2,880 x 1,440 dpi	_		
Minimum Ink Droplet Volume	3.5pl			•
Printing Specifications			66	7mm
Print Speed	Draft Mode (360 x 360 dpi): 0.8 minutes		1,356mm	7 11 11 11
	Normal Mode (360 x 720dpi): 1.5 minute	es		
	Fine Mode (720 x 720 dpi): 3.3 minutes		00 0000	
	Super Fine Mode (720 x 1440 dpi): 8.1 n	ninutes	SC-P8000	
	Super Photo Mode (2,880 x 1,440 dpi): 1	13.4 minutes	Weight: Approx. 135 k	.g
Ink System	-			
Ink Type	Pigment Ink		look and the same of the same	
Ink Brand Name	UltraChrome HD Ink	UltraChrome HD Ink		
Colour	Cyan, Photo Black, Matte Black, Vivid	Cyan, Photo Black, Matte Black,		1,218mm
Joioui	Magenta, Yellow, Light Cyan, Vivid Light	Vivid Magenta, Yellow, Light Cyan,		
	Magenta, Light Black, Light Light Black	Vivid Light Magenta, Light Black,		
	wayona, Light Diack, Light Light Black			a \downarrow
	150   050   700	Light Light Black*1 / Violet*1		, i
Ink Capacity	150ml, 350ml, 700ml		1,864mm	√667mm
Ink Case	Ink Cartridge		1,00411111	
Paper Handling				
Paper Path	Roll, Cut Sheet		WHAT'S IN THE BOX	
Paper Feed Method	Friction Feed		Printer	n.
Maximum Roll Diameter	254 - 610 mm, 2 inch-core / 3inch-core	254 – 1,118mm, 2 inch-core/ 3 inch-core	Initial ink cartridge (110)	mı)
	2 inch-core: Max 103 mm/ 3 inch-core:	2 inch-core: Max 103 mm/ 3 inch-core:	<ul><li>AC power cable</li><li>Setup guide</li></ul>	
	Max 150 mm	Max 150 mm	Software CD-ROM	
Paper Size (Width)	254 mm (10") – 610 mm (24"): Roll Paper	254 mm (10") – 1,118 mm (44"): Roll Paper	Maintenance box	
& Thickness	254 mm (10") - 610 mm (24"): Cut Sheet	210 mm (A4) – 1,118 mm (44"): Cut Sheet	maintenance sox	
	0.08 – 1.50 mm	0.08 – 1.50 mm		
Borderless	254mm (10"), 300mm (11.8"),	728mm(29"), 841mm (A0/33"),	OPTIONS	
Bordonooo	329mm (13"), 406mm (16"),	914mm (36"), 1118mm (44") 728mm	For CO D6000.	
	432mm (17"), 515mm (20.3"),	(29"), 841mm, (A0/33"), 914mm (36")	For SC-P6000: Spectroproofer	C12C890531)
	594mm (23"), 610mm (24")	1,118mm (44")	- Mounter 24"	0120090001)
Compostivity	59411111 (23 ), 61011111 (24 )	1,11011111 (44 )	ILS30EP	C12C932021
Connectivity	LI' 0 I LIOD - 40D A 0E T/400D A 0E T/	ACCODAGE T		
Interface	Hi-Speed USB, 10BASE-T/100BASE-T/	1000BASE-1	For SC-P8000:	
Printer Language	ESC/P raster		Spectroproofer	C12C890521
Memory	1GB		– Mounter 44"	
Operating System			ILS30EP	C12C932021
PC System Requirement	Windows XP/Vista 7, 8, 8.1 (32/64bit) or	later.	Automotic Take up Deal	C12C815321
Mac System Requirement	Mac OS X10.6.8 or later		Automatic Take-up Reel Hard Disc Unit, 320GB	C12C815321
Utility Software	-		Additional Roll Media	C12C811241
Bundled in CD	Windows - Printer driver - EpsonNet Set	rup - EpsonNet Print - EpsonNet Config	Adapters	0120011241
	SE - EPSON manuals - Manual Launche		Optional Roll Paper Belt	C12C890121
	Driver - PS Folder		Auto Cutter Spare Blade	C12C815331
Web Delivery	Windows - Epson Media Installer - Epson	nNet SetunManager - Enson Device		
VVCD DCIIVCI y	Admin - Epson Edge Dashboard - Epsor		*For SC-P8000 only.	
		Admin (Option) - Order Controller (Option)		
	Mac - Printer driver - EpsonNet Config S		©2024 Epson Singapore Pte Ltd	. All Rights Reserved
	Installer - Epson Edge Dashboard - Epso	on Print Layout - PS DriveriOS/Android -	Reproduction in part or in whole,	
	Epson Smart Panel		permission from Epson, is strictly	-
Electrical Specifications			EPSON is a registered trademark Corporation.	ot Seiko Epson
Voltage	AC 100 – 240V, 50/60Hz		All other product names and other	or company names
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A		used herein are for identification p	
Power Consumption	Operating: Approx. 65W,	Operating: Approx. 75W,	are the trademarks or registered	
-	Ready: Approx. 19W,	Ready: Approx. 19W,	respective owners.	
	Sleep: Approx. 2.0W,	Sleep: Approx. 2.0W,	Epson disclaims any and all rights Projected images shown herein a	
	Standby: Approx. 0.5W	Standby: Approx. 0.5W	The actual product design and co	
<b>Environmental Conditions</b>		1	Specifications are subject to char	nge without notice ar
Temperature	Operating: 10°C to 35°C / Storage: -20°	C to 40°C	may vary between countries. Plea Epson offices for more informatio	
Humidity		on), Storage: 5% to 85% (no condensation)	Apple, iPad and iPhone are trade	
Dimensions & Weight		, storago. o /o to oo /o (no condendation)	registered in the U.S. and other o	

<sup>\*1</sup> Users need to choose to configure the machine with either light light black or violet. Once this choice has been made, it is final and cannot be undone or switched at a later time. 99% Pantone coverage requires configuration with violet ink. Configured with light black provides

1,356 x 1,218 x 667 mm

Approx. 101 kg

1,864 x 1,218 x 667 mm

Approx. 135 kg

#### imensions and Weight





#### VHAT'S IN THE BOX

- Initial ink cartridge (110ml)
- AC power cable
- Setup guide
- Software CD-ROM

#### Maintenance box

#### PTIONS

_	For SC-P6000: Spectroproofer - Mounter 24" ILS30EP	C12C890531) C12C932021
_ _ _	For SC-P8000: Spectroproofer – Mounter 44" ILS30EP	C12C890521 C12C932021
-	Automatic Take-up Reel Hard Disc Unit, 320GB Additional Roll Media	C12C815321 C12C848031 C12C811241

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing. Printed April 2024

<sup>\*1</sup> Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range.

Printable length is limited depending on restrictions of OSs or applications.
 Compatible with the USB 3.0 specification.

<sup>\*4</sup> For utility software, please refer to system requirements for each utility software.

MODEL NUMBER	SC-P7530	SC-P9530
SKU Number	C11CH12402	C11CH13402
Printing Technology		1
Printing Method	PrecisionCore Inkjet Technology, Variab	le-Sized Droplet Technology
Print Head	PrecisionCore MicroTFP Printhead	io dizad Bropiet redifficiogy
Nozzle Configuration	9,600 Nozzles (800 nozzles x 12 chann	nels x 1 head)
Maximum Resolution	2,400 x 1,200 dpi	loto X i floady
Minimum Ink Droplet Volume	3.5pl	
Printing Specifications		
Print Speed	97 sec (Level 1)	219 sec (Level 1)
Time Opood	122 sec (Default) Premium Glossy	285 sec (Default) Premium Glossy
	Photo Paper 170gsm A1 Size/ISO Bike	
Ink System	- 110to 1 apoi 11 ogo7 ti olegi 100 biito	- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1
Ink Type	Pigment Ink	
Ink Brand Name	UltraChrome Pro 12 Ink	
Colour	Cyan, Vivid Magenta, Yellow, Light Cyar	n. Vivid Light Magenta, Orange, Green.
00.00.	Violet, Photo Black, Matte Black, Grey,	
Ink Capacity	350ml, 700ml	Light Groy
Ink Capacity  Ink Case	Ink Cartridge	
Paper Handling	30.0.090	
Paper Path	Roll Sheet (Manual)	
Paper Feed Method	Friction Feed	
Maximum Roll Diameter	2" Roll core-media: Max. 103 mm, 3" F	Roll core-media: Max. 150 mm
Maximum Roll Weight	6kg	10kg
Paper Width (Roll)	254 – 620 mm	254 – 1,118 mm
Paper Width (Cut Sheet)	210 – 620 mm	210 – 1,118 mm
Paper Thickness (Roll)	0.08 – 0.5 mm	.   210 1,11011111
Paper Thickness (Manual)	Cut Sheet: 0.08 – 1.5 mm	
Connectivity	Out Oricet. 0.00 1.5 mm	
Interface	Super-Speed USB*1, 100BASE-TX /	USB Interface (Hi-Speed USB/USB),
interiace	1000BASE-T	1000BASE-T/100BASE-TX
Printer Language	ESC/P raster	- I TOODHOL T/ TOODHOL-TA
Memory	2GB	
Operating System		
PC System Requirement	Windows 10, 8.1, 8, 7, Windows Vista,	Windows XP (32hit/64hit)
. S System Hoganorhom	Windows Server 2019/2016/2012 R2/2	
Mac System Requirement	Mac OS X 10.6.8 or later, Mac OS 11 o	
Utility Software	Mac Co / Tololo of latel, Mac Co TT o	i ideoi
Bundled in CD	Windows Install Navi - Printer driver - E	nsonNet Setup - EnsonNet Print
Barraica ii 1 OB	- EpsonNet Config SE -Epson Software	LIndater - EPSON manuals - Manual
		ac Setup Navi EpsonNet Config SE Epson
	Software Updater	LOSOIT THEY EPOOLING OUTING OF EPOOL
Web Delivery		mware Updater, PS Driver, HDI Driver, XPS
Donvory	Driver, Epson Media Installer, EpsonNet	
		Print, Epson Print Layout, LFP Accounting
		aller, Install Navi - Printer driver - EpsonNet
	Config - Epson Software Updater - Unit	
	Installer, Firmware Updater, Linux, Print	
Electrical Specifications	inotalior, i intrivaro opuator, Elitax, i filit	or direct
Voltage	AC 100 - 240V, 50/60Hz	
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A	
Power Consumption	Operating: Approx. 85W	Operating: Approx. 110W
. ottor condumption	Ready: Approx. 32W	Ready: Approx. 32W
	Sleep: Approx. 3.4W	Sleep: Approx. 3.4W
	Standby: Approx. 0.3W	Standby: Approx. 0.3W
Environmental Conditions	- Διαπαυγ. Αρριολ. Ο.344	- I Starraby, Approx. 0.044
	Operating: 10°C to 35°C / Storage: -20	0°C to 40°C
Temperature		
Humidity	Operating: 20% to 80% (no condensati	on), Storage: 5% to 85% (no condensation
Dimensions & Weight	Ctorogo 1 401 - 1 010 007	Ctorogo 1 000 1 010 007
Dimension (W x H x D)	Storage: 1,401 x 1,218 x 667 mm	Storage: 1,909 x 1,218 x 667 mm
	Printing: 1,401 x 1,218 x 2,211 mm Approx. 121.7 kg	Printing: 1,909 x 1,218 x 2,211 mm
Weight	0 p p r p v 1 1 1 7 kg	Approx. 153.8 kg

<sup>\*1</sup> Might differ depends on applications/media.

#### **Dimensions and Weight**

SC-P7530

Weight: Approx. 121.7 kg



SC-P9530 Weight: Approx. 153.8 kg



#### WHAT'S IN THE BOX

- Printer Stand
- Initial ink cartridge (110ml) AC power cable
- Setup guide Software CD-ROM
- Maintenance box

#### OPTIONS

- SpectroProofer SpectroPhotoMeter ILS30EP
- Auto Take Up Reel Unit Hard Disk Unit
- Adobe® PostScript® 3™
- Expansion Unit Roll Media Adapter

©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing. Printed April 2024

#### **SPECIFICATIONS**

MODEL NUMBER	SC-P6530E	SC-P6530D	Dimensions and Weight
SKU Number	C11CJ48402	C11CJ49402	SC-P6530E
Printing Technology			Weight: Approx. 115.2kg
Printing Method	PrecisionCore Inkjet Technology, Val	riable-Sized Droplet Technology	
Print Head	PrecisionCore MicroTFP Printhead	-	
Nozzle Configuration	9,600 Nozzles		
Black	Pk:1,600, Mk:1,600		975mm
Colour	C:1,600, M:1,600, Y:1,600, Gray:1,	600	
Maximum Resolution	2,400 x 1,200 dpi		
Minimum Ink Droplet Volume	3.5pl		
Printing Specifications			499mm
Print Speed	A1 Size Premium Glossy Photo Pap	per 170gsm, 1200dpi x 1200dpi	1,365mm
	EPSON Standard (sRGB) / Quality:		
Margin Roll Paper	Right: Min. 3mm*1 / Left: Min. 0mm		00 D0500D
Cut Sheet	Top: Min. 3mm <sup>*1</sup> / Bottom: Min. 1mi	m <sup>*1</sup>	SC-P6530D Weight: Approx. 115.6kg
Minimum Line Width	0.08 mm <sup>*2</sup> (0.02 mm <sup>*3</sup> )		Weight. Approx. 115.0kg
Ink System			
Ink Type	Pigment Ink		5700
Ink Brand Name	UltraChrome Pro 6 Ink		American and
Colour	Cyan, Magenta, Yellow, Gray, Photo	Black, Matte Black	975mm
Ink Capacity	350, 700 ml		
Ink Case	Ink Cartridge		
Paper Handling		1	499mm
Paper Path	Roll (Single Roll),	Roll (Double Roll),	1,365mm
	Cut Sheet (Manual Feed),	Cut Sheet (Manual Feed),	.,000
	Poster Board (Manual Feed)	Poster Board (Manual Feed)	
Paper Feed Method	Friction Feed		
Maximum Roll Diameter	Max. 170 mm*4		WILLIATIO IN THE DOV
Maximum Roll Weight	6.8kg		WHAT'S IN THE BOX  • Printer
Paper Width (Roll)	254 – 610 mm		Initial ink cartridge (110ml)
Paper Width (Cut Sheet)	203 – 610 mm		AC power cable
Paper Thickness (Roll)	0.07 – 0.8 mm		Setup guide     Sethware OR ROM
Paper Thickness (Manual)	Cut Sheet: 0.07 – 0.8 mm / Poster I	Board: 0.8 – 1.5 mm	<ul><li>Software CD-ROM</li><li>Maintenance box</li></ul>
Maximum Printable Length	91 m <sup>*5</sup>	(4011) 050 (4411) 400 (4011) 400	Widiliter laince box
Borderless Sizes		nm (13"), 356mm (14"), 406mm (16"), 432mm	
D    D   C		515mm (20.3"), 594mm (23"), 610mm (24")	OPTIONS
Roll Paper Remaining	_ The remaining amount is managed i	by the barcode printed on roll paper	Production Stacker (24")
Connectivity	C	000DACE T/IEEE000 111b /c/c/c	SSD Unit (C12C936671)
Interface	SuperSpeed USB, 100BASE-TX/10	JUUBASE-1/IEEE8U2.11b/g/n/ac,	
Drinter Language	USB Memory Stick ESC/P raster	LECC/D master LID OL/O* LID DTL*	*It is recommended to do test before
Printer Language	ESC/P raster	ESC/P raster, HP-GL/2*, HP RTL*, Adobe PostScript 3, Adobe PDF 1.7	purchasing printer if HP-GL/2 or HP R1
USB Direct Print	Von	Adobe PostScript 3, Adobe PDF 1.7	direct print is used, because the suppo
	Yes 4GB		is dependent on application or data.
Memory HDD (Optional)	SSD 960GB		
Operating System	_ <u>33D 900GB</u>		
PC System Requirement	Windows 10, 8.1, 8, 7, Windows Vis	eta Windows VD (20hit/64hit)	
PC System nequirement		R2/2012/2008/2003 R2/2003 SP2 or later	
Mac System Requirement	Mac OS X 10.6.8 or later, Mac OS 1		
Utility Software	_ IVIAC OO X TO.O.O OF TALEF, IVIAC OO T	i i di latei	©2024 Epson Singapore Pte Ltd. All Rights Reser
Bundled in CD	Windows - Printer driver - EnsonNe	t Setup - EpsonNet Print - EpsonNet Config	Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.
Barraica III OB	SE - EPSON manuals - Manual Lau		EPSON is a registered trademark of Seiko Epson
Web Delivery		etupManager - Epson Device Admin - Epson	Corporation.
vvoo Bolivory		out - Epson Print Automate - Order Controller	All other product names and other company name
		nfig SE - EPSON manuals - Epson Media	used herein are for identification purposes only and are the trademarks or registered trademarks of the
	Installer - Epson Edge Dashboard -		respective owners.
	Epson Smart Panel	Epsort fill Edyodiloo/Allarold	Epson disclaims any and all rights in those marks.
Electrical Specifications	_ Epoch Chart and		Projected images shown herein are simulations.  The actual product design and contents may vary.
Voltage	AC 100 - 240V, 50/60Hz		Specifications are subject to change without notic
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6		may vary between countries. Please check with lo Epson offices for more information.
Power Consumption	Operating: Approx. 75W, Ready: Ap		Apple, iPad and iPhone are trademarks of Apple Ir
1 ever concampaci	Sleep: Approx. 2W, Standby: Appro		registered in the U.S. and other countries. App Sto
<b>Environmental Conditions</b>			a service mark of Apple Inc.  Android is a trademark of Google Inc.
Temperature	Operating: 10°C to 35°C / Storage:	-20°C to 40°C	Android is a trademark of Google Inc.
Humidity	Operating: 20% to 80% (no conden		
	Storage: 5% to 85% (no condensati		Dealer's Stamp
Dimensions & Weight		·· · ,	
Dimension (W x D x H)	1,365 x 499 x 975 mm		
Weight	Approx. 115.2kg	Approx. 115.6kg	
	0	1 1.11. 2.11.0	
<ul> <li>Might differ depends on applications</li> <li>ISO/IEC 24790, Single weight matte</li> <li>Addressable.</li> </ul>	s/media. e paper, CAD/line drawing, speed, high speed=Off	f, finest detail=On.	Information correct at time of printing. Printed April 2024

SO/IEC 24/90, Single weight matte paper, CAD/line drawing, speed, high speed=Orr, linest detail=On.
 Addressable.
 Depending on the thickness of the paper. It is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range.
 Printable length is limited depending on restrictions of operating systems or applications.

RTL

ary. otice and h local

le Inc., Store is

#### **SPECIFICATIONS**

MODEL NUMBER SKU Number	SC-P8530D C11CJ50402	SC-P8530DM C11CJ51402	SC-P8530DL C11CJ75402	Dimensions and Weight
Printing Technology	0110000402	10110001402	10110373402	SC-P8530D / P8530DM
Printing Method		Technology, Variable-Sized Dro	oplet Technology	Weight: Approx. 155kg
Print Head	PrecisionCore MicroT	FP Printhead		
Nozzle Configuration  Black	9,600 Nozzles Pk:1,600, Mk:1,600			
Colour	C:1,600, M:1,600, Y:	1,600, Gray:1,600		975n
Maximum Resolution	2,400 x 1,200 dpi			
Minimum Ink Droplet Volume Printing Specifications	3.5pl			
Print Speed	B0 size Premium Glo	ssy Photo Paper 170gsm:		499mr
	152 sec (Speed), 281	sec (Quality), 614 sec (Max (		1,848mm
	Plain Paper: 35 sec (I	Draft), 46 sec (Speed), 258 se	ec (High Quality)	
	Standard(sRGB)/Qua		per 170gsm 1200dpi x 1200dpi:	
Margin Roll Paper	Right: Min. 3mm <sup>*1</sup> / L	.eft : Min. 0mm*1		SC-P8530DL
Cut Sheet	Top: Min. 3mm*1 / Bo	ttom: Min. 1mm*1		Weight: Approx. 165kg
Scanning Specifications Max. Scan Speed	_	10 ips	1-	
Max. Optical Resolution	_	600 dpi		-
Scanning Specifications		· · · · · · · · · · · · · · · · · · ·		975n
Max. Scan Speed Max. Optical Resolution	10 ips 600 dpi			
Copying Specifications	<u>600 api</u>			
Scaling		25 – 755%		499mr
Max. Copy	<u> </u>	99 copies		1,848mm
Ink System Ink Type	Pigment Ink			
Ink Brand Name	UltraChrome Pro 6 In	k	_	
Colour	Cyan, Magenta, Yello	w, Gray, Photo Black, Matte E		
Ink Capacity Ink Case	350, 700 ml Ink Cartridge		1,600 ml Ink Supply Unit	WHAT'S IN THE BOX
IIIk Case	irik Cartriage		(Bulk Ink Solution)	Printer
Paper Handling				<ul> <li>Initial ink cartridge (240ml)</li> </ul>
Paper Path		t Sheet (Manual Feed), Poster	r Board (Manual Feed)	AC power cable     Setup guide
Paper Feed Method Maximum Roll Diameter	Friction Feed Max. 170 mm <sup>2</sup>		_	<ul><li>Setup guide</li><li>Software CD-ROM</li></ul>
Maximum Roll Weight	12.5kg		_	<ul> <li>Maintenance box</li> </ul>
Paper Width (Roll)	254 – 1,118 mm			
Paper Width (Cut Sheet) Paper Thickness (Roll)	<u>203 – 1,118 mm</u> 0.07 – 0.8 mm			OPTIONS
Paper Thickness (Manual)		3 mm / Poster Board: 0.8 – 1.	5 mm	Roll Feed Spindle (44") (C12C936
Maximum Printable Length	91 m*3			Production Stacker (44") (C12C9: SSD Unit (C12C936671)
Borderless Sizes		(11.8"), 330mm (13"), 356mm )8mm (20"), 515mm (20.3"), 59		002 0 (0.120000)
	700mm (27.5"), 728m	m (28.6"), 841mm (33"), 914m	m (36"), 1030mm (40.5").	
	1188mm (44")			
Roll Paper Remaining	The remaining amour	nt is managed by the barcode	printed on roll paper	
Connectivity Interface	SuperSpeed USB*1. 1	100BASE-TX /1000BASE-T/IE	FEF802.11b/g/n/ac	
Printer Language	ESC/P raster, HP-GL	/2*, HP RTL*, Adobe PostScr	ipt 3, Adobe PDF 1.7	*It is recommended to do test be
USB Direct Print	Yes			purchasing printer if HP-GL/2 or
Memory HDD (Optional)	4GB SSD 960GB			direct print is used, because the is dependent on application or da
Operating System	<u> </u>			
PC System Requirement		7, Windows Vista, Windows >		
Mac System Requirement		9/2016/2012 R2/2012/2008/ ater, Mac OS 11 or later	2003 R2/2003 SP2 or later	
Utility Software	WIAC OO X 10.0.0 01 1	ater, Mac OO 11 Or later		©2024 Epson Singapore Pte Ltd. All Rights Reproduction in part or in whole, without th
Bundled in CD		ver - EpsonNet Setup - Epso		permission from Epson, is strictly prohibited
		s - Manual Launcher - LFP Pri	int Plug-in for Office - PS	EPSON is a registered trademark of Seiko E Corporation.
Web Delivery	Driver - PS Folder Windows - Foson Me	edia Installer - EpsonNet Setu	pManager - Epson Device	All other product names and other compan
rea zenre. y	Admin - Epson Edge	Dashboard - Epson Print Lay	out - Epson Print Automate -	used herein are for identification purposes of are the trademarks or registered trademarks
	Epson Edge Print (Or	otion) - Epson Print Admin (Op	otion) - Order Controller (Option)	respective owners.
		EpsonNet Config SE - EPSO	N manuals - Epson Media Lyout - PS DriveriOS/Android -	Epson disclaims any and all rights in those i
	Epson Smart Panel	c Dashboard - Epsort fint Ed	lyout 10 billon/Android	Projected images shown herein are simulati The actual product design and contents ma
<b>Electrical Specifications</b>	10 100 0101 =010			Specifications are subject to change withou may vary between countries. Please check
Voltage Rated Current	AC 100 - 240V, 50/6 AC 100V 3.4AAC 10			Epson offices for more information.
Power Consumption	Operating: Approx. 7		Operating: Approx. 75W	Apple, iPad and iPhone are trademarks of A registered in the U.S. and other countries. A
	Ready: Approx. 32W		Ready: Approx. 32W	a service mark of Apple Inc.
	Sleep: Approx. 2.0W	20.01	Sleep: Approx. 2.0W	Android is a trademark of Google Inc.
Environmental Conditions	Standby: Approx. 0.3	OVV	Standby: Approx. 0.3W	
				Dealer's Stamp
Temperature		$5^{\circ}$ C / Storage: -20 $^{\circ}$ C to 40 $^{\circ}$ C		Doddor o Otamp
Temperature Humidity			e: 5% to 85% (no condensation)	Dodoi o Otamp
Temperature Humidity Dimensions & Weight	Operating: 20% to 80	0% (no condensation), Storag		Board Gramp
Temperature Humidity		0% (no condensation), Storag		Sould a stamp





36171) 937131)

pefore or HP RTL e support data.

ts Reserved. the written

Epson

any names s only and rks of their

marks. ations. nay vary. out notice and k with local

of Apple Inc., a. App Store is

#### **SPECIFICATIONS**

MODEL NUMBER	SC-P20070
SKU Number	C11CE20402
Printing Technology	
Printing Method	PrecisionCore Inkjet Technology, Variable-Sized Droplet Technology
Print Head	PrecisionCore MicroTFP Printhead
Nozzle Configuration	4.000 Nozzles
Black	PK, MK, DGY, GY, LGY: 800 Nozzles
Colour	C, VM, Y, LC, VLM: 800 Nozzles
/Jaximum Resolution	2,400 x 1,200 dpi
Inimum Ink Droplet Volume	3.5pl
Printing Specifications	0.0pi
rint Speed	Draft Mode (600 x 600 dpi): 1/9 minutes
iiit Speed	Normal Mode (1,200 x 1,200 dpi): 3.0 minutes
	Fine Mode (2,400 x 1,200 dpi): 5.6 minutes
-l- Ct	Fine Mode (2,400 x 1,200 dpi): 5.6 minutes
nk System	B:
nk Type	Pigment Ink
nk Brand Name	UltraChrome Pro Ink
Colour	Cyan, Vivid Magenta, Yellow, Photo Black, Matte Black, Dark Grey, Grey,
	Light Grey, Light Cyan, Vivid Light Magenta
nk Capacity	700ml
nk Case	Ink Cartridge
aper Handling	
Paper Path	Roll (Single Roll), Cut Sheet (Manual Feed)
aper Feed Method	Friction Feed
Paper Width (Roll)	254 (10") – 1,626 (64") mm
Paper Width (Cut Sheet)	210 (A4) – 1,118 (44") mm
Paper Thickness (Roll)	0.08 – 1.50 mm
Borderless Sizes	254mm (10"), 300mm (11.8"), 329mm (A3+/A3++), 406mm (16"), 432mm
orderiode Cizoo	(17"/USC), 508mm (20"), 515mm (20.3"/B2), 594mm (A1), 610mm (24"/A0+),
	728, (29"/B1), 841mm (A0), 914mm (36"/A0+), 1,030mm (B0), 1,118mm
Ioll Danar Damaining	(44"/B0+), 1,270mm (50"), 1,372mm (54"), 1,524mm (60")
oll Paper Remaining	The remaining amount is managed by the barcode printed on roll paper
connectivity	11.0
nterface	Hi-Speed USB
Printer Language	ESC/P raster
JSB Direct Print	Yes
lemory	1.5GB
Operating System	
C System Requirement	Windows XP, Vista, 7, 8, 8.1 (32/64bit) or later
Nac System Requirement	Macintosh Mac OS X 10.6.8 or later
Itility Software	
Bundled in CD	User's Guide (EN), Network Guide (EN), LFP RemotePanel 2, Epson Color
	Calibration Utility, EpsonNet Setup, EpsonNet Confi g, EpsonNet Print
	(Windows only)
Veb Delivery	LFP Accounting Tool (Job monitoring, consumable cost tracking),
<b>,</b>	HDD Utility software (Web download)
lectrical Specifications	1.55 Starty Contrate (1705 Contrated)
oltage	AC 100 – 240V, 50/60Hz
ated Current	AC 100 – 240V, 30/00FIZ AC 100V 3.4AAC 100-240V 3.4-1.6A
ower Consumption	Operating: Approx. 95W,
	Sleep: Approx. 2.8W <sup>-1</sup> ,
	Standby: Approx. 0.5W
nvironmental Conditions	
emperature	Operating: 10°C to 35°C / Storage: -20°C to 40°C
lumidity	Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation
Dimensions & Weight	
	0.445 4.445 700
Dimension (W x H x D)	2,415 x 1,145 x 760 mm

Interface is 1000BASE-T.

#### ensions and Weight

#### P20070 ght: Approx. 171 kg



#### IAT'S IN THE BOX

- itial ink cartridge (110ml)
- C power cable

- Setup guide Software CD-ROM Maintenance box

TIONS
o Cutter Spare Blade aning Stick C13S210040 C13S090013 ntenance Box C13T619300 Take-up Reel Unit I Adapter

bbe® PostScript® 3™

bansion Unit

d Disk Unit

4 Epson Singapore Pte Ltd. All Rights Reserved. oduction in part or in whole, without the written ission from Epson, is strictly prohibited.

C12C932201

C12C891131 C12C848031

N is a registered trademark of Seiko Epson ration.

breath.

The product names and other company names herein are for identification purposes only and the trademarks or registered trademarks of their ctive owners.

n disclaims any and all rights in those marks. cted images shown herein are simulations. citual product design and contents may vary. ifications are subject to change without notice and vary between countries. Please check with local n offices for more information.

e, iPad and iPhone are trademarks of Apple Inc., ered in the U.S. and other countries. App Store is rice mark of Apple Inc.

d is a trademark of Google Inc.

Dealer's Stamp

Depending on the thickness of the paper. It is larger than the available outer diameter size within the outside diameter range.
 Printable length is limited depending on restrictions of operating systems or applications.

Information correct at time of printing. Printed April 2024