SPECIFICATIONS

SKU Code		SC-T5730D C11CH81402	C11CH83402	Dimensions and We SC-T3730E/DE/D
Printer Width	24"	36"	44"	 Weight: Approx. 118
Printing Technology				
Print Head	PrecisionCore MicroTFP Printhe			The second second
Nozzle Configuration Maximum Resolution	9,600 Nozzles (400 nozzles x 24 channels x 1 head) 2,400 x 1,200 dpi			thermourned in the
Minimum Ink Droplet Volume	3.5pl			
Line Accuracy	±0.1% or ±0.26mm			
Minimum Line Width	0.08mm ^{*1} (0.02mm ^{*2})			
Print Speed	A1 Size	AO Size	BO Size	1.005
	Plain Paper: 16 sec (Draft),	Plain Paper: 25 sec (Draft),	Plain Paper: 35 sec (Draft),	1.365mm
	21 sec (Speed), 111 sec (High Quality)	32 sec (Speed), 184 sec (High Quality)	46 sec (Speed), 258 sec (High Quality)	
	Premium Glossy Photo	Premium Glossy Photo	Premium Glossy Photo	SC-T5730D
	Paper 170gsm: 65 sec	Paper 170gsm: 108 sec	170gsm: 152 sec	Weight: Approx. 136
	(Speed), 111 sec (Quality),	(Speed), 184 sec (Quality),	(Speed), 281 sec (Quality),	
	245 sec (Max Quality)	417 sec (Max Quality)	614 sec (Max Quality)	100
CAD	A1 Size	A1 Landscape		Management of the second
	Plain Paper 300dpi x 600dpi		dpi Line Draw/Draft: 16 sec,	
	Line Draw/Draft: 20 sec,	600dpi x 600dpi Line Drav	W/Speed: 23 sec	
	600dpi x 600dpi Line Draw/Speed: 27 sec Plain Paper 300dpi x 600dpi Line Draw/Draft: 28 sec,			
	Elle Braw opcea. 27 300	600dpi x 600dpi Line Drav		4
Poster	A1 Size	AO Size	BO Size	
	Plain Paper 300dpi x 600dpi	Plain Paper 300dpi x 600dpi	i Plain Paper 300dpi x 600dpi	1,01011111
	EPSON Vivid/Speed: 21 sec	EPSON Vivid/Speed: 32 sec	EPSON Vivid/Speed: 46 sec	- SC-T7730D
Ink System				
Ink Type	UltraChrome XD3 Pigment Ink Cyan, Magenta, Yellow, Red, M	atta Blaak, Dhata Blaak		_ Weight: Approx. 155
Colours Paper Handling	Cyan, Magerita, Yellow, Red, M	alle black, Pholo black		
Paper Path	Roll (Double Roll), Cut Sheet (M	anual Feed). Poster Board (N	(anual Feed)	Pro Contraction
Maximum Roll Diameter	2/3" Core, Max. 170mm			Antonio antonio antonio anto
Maximum Roll Weight	6.8kg	10.5kg	<u>12.5kg</u>	
Paper Width Roll	254 – 610mm	254 – 914mm	254 – 1,118mm	
Cut Sheet	203 – 610mm	203 – 914mm	203 – 1,118mm	
Margin (Roll Paper)³	Top, Bottom: Min. 3mm right, le	eft: Min. Omm	203 – 1,118mm	
Margin (Roll Paper) ⁻³ Margin (Cut Sheet) ⁻³	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1	eft: Min. 0mm 2.7mm right, left: Min. 0mm		- 1,848mm
Margin (Roll Paper) ⁻³ Margin (Cut Sheet) ⁻³ Media Thickness	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Posta	er Board: 0.8mm – 1.5mm	- 1,848mm
Margin (Roll Paper) ⁻³ Margin (Cut Sheet) ⁻³ Media Thickness Borderless Width Sizes (mm) ⁻⁴	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Posta	er Board: 0.8mm – 1.5mm	1,848mm
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm) ^{'4} Connectivity Interface	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm) ^{'4} Connectivity Interface Wi-Fi Direct	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	- OPTIONS
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm) ^{'4} Connectivity Interface Wi-Fi Direct USB Host	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁻⁵	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE device connections)	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	OPTIONS Roll Feed Spindle (24")
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm) ^{'4} Connectivity Interface Wi-Fi Direct USB Host	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ^{*5} SC-T3730D / T5730D / T7730	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE device connections) D:	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36")
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE device connections) D:	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44")
Margin (Roll Paper) ³ Margin (Cut Sheet) ⁷³ Media Thickness Borderless Width Sizes (mm) ⁷⁴ Connectivity Interface Wi-Fi Direct USB Host	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ^{*5} SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ^{*8} , HI SC-T3730E/T3730E/	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post , 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB)
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8}	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ¹⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ¹⁸ , HI SC-T3730D / T5730D / T7730 Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ECSC/R raster, HP-GL/2 ¹⁸ , HP R	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 43 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8} D:	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ¹⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ¹⁸ , HI SC-T3730D / T5730D / T7730DE: Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T6730D / T7730 ESC/R raster, HP-GL/2 ¹⁸ , HP R SC-T3730E / T3730D / T6730D / T6730	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HI SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ⁸ , HP R SC/T3730F: ESC/R raster, HP-GL/2 ⁸ , HP R	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HP Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ⁸ , HP R SC-73730D/T3730DE: ESC/R raster, HP-GL/2 ⁸ , HP R 4.3" Touch Screen	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ¹⁶ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ¹⁷ Control Panel Mobile Solutions	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HP R SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ³ , HP R SC/R raster, HP-GL/2 ³ , HP R 4.3 ^m Touch Screen Epson Smart Panel, Apple AirP	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ¹⁶ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{*6} Printer Languages ^{*7} Control Panel Mobile Solutions Memory	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HP Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ⁸ , HP R SC-73730D/T3730DE: ESC/R raster, HP-GL/2 ⁸ , HP R 4.3" Touch Screen	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8} D: TL ^{*8} , Adobe PostScript 3, Ad TL ^{*8}	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n)	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ¹⁷ Control Panel Mobile Solutions	Top, Bottom: Min. 3mm right, Ic Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes's SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2*, HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC/T3730D / T5730D / T7730D ESC/R raster, HP-GL/2*, HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions <u>Memory</u> Operating System	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ¹⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ¹⁸ , HI SC-T3730D / T5730D / T7730D PDF, TIFF, JPEG, HP-GL/2 ¹⁸ , HP SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730D ESC/R raster, HP-GL/2 ¹⁸ , HP R 4.3 ^m Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm) ^{'4} Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ^{:7} Control Panel Mobile Solutions <u>Memory</u> Operating System Electrical Specifications	Top, Bottom: Min. 3mm right, IcTop: Min. 3mm, Bottom: Min. 1Roll: 0.07mm – 0.8mm, Cut Sh1118, 1030, 914, 841, 728, 700USB 3.0, Ethernet (100BASE-TWi-Fi Direct (Simple AP, up to 8Yes ⁵ SC-T3730D / T5730D / T7730PDF, TIFF, JPEG, HP-GL/2 ³ , HISC-T3730D / T5730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-T3730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-T3730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-73730E/T3730DE:ESC/R raster, HP-GL/2 ³ , HP R4.3" Touch ScreenEpson Smart Panel, Apple AirP4GB + 960GB (Option SSD)Windows XP (32bit/64bit) / VistWindows Server 2003 SP2 or IaMac OS X 10.6.8 or later	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L
Margin (Roll Paper) ³ Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ⁻⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730 Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ³ , HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ³ , HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ³ , HP R SC-R raster, HP-GL/2 ³ , HP R SC-R raster, HP-GL/2 ³ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	 OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick ©2023 Epson Singapore Pte L Reproduction in part or in whole
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current	Top, Bottom: Min. 3mm right, IcTop: Min. 3mm, Bottom: Min. 1Roll: 0.07mm – 0.8mm, Cut Sh1118, 1030, 914, 841, 728, 700USB 3.0, Ethernet (100BASE-TWi-Fi Direct (Simple AP, up to 8Yes ⁵ SC-T3730D / T5730D / T7730PDF, TIFF, JPEG, HP-GL/2 ³ , HISC-T3730D / T5730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-T3730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-T3730D / T5730D / T7730ESC/R raster, HP-GL/2 ³ , HP RSC-73730E/T3730DE:ESC/R raster, HP-GL/2 ³ , HP R4.3" Touch ScreenEpson Smart Panel, Apple AirP4GB + 960GB (Option SSD)Windows XP (32bit/64bit) / VistWindows Server 2003 SP2 or IaMac OS X 10.6.8 or later	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption	Top, Bottom: Min. 3mm right, Ic Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes's SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2*, HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC/T3730D / T5730D / T7730D ESC/R raster, HP-GL/2*, HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8} D: TL ^{*8} , Adobe PostScript 3, Ad TL ^{*8} rint a / 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick ©2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOURV
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730 Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ³ , HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ³ , HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ³ , HP R SC-R raster, HP-GL/2 ³ , HP R SC-R raster, HP-GL/2 ³ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ rint a / 7 / 8 / 8.1 / 10 / 11	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR V trademarks of Seiko Epson Co All other product names and of
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ^{'7} Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep	Top, Bottom: Min. 3mm right, Ic Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2°, HH SC-T3730D / T5730D / T7730 Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2°, HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2°, HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ^{*®} G, HP-GL/2 ^{*®} , HP RTL ^{*®} D: TL ^{*®} , Adobe PostScript 3, Ad TL ^{*®} rint a / 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2 80W <u>32W</u> 2.0W	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) bobe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stic EPSON and EXCEED YOUR VI trademarks of Seiko Epson Co Al other product names and of used herein are for identification
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{*6} Printer Languages ^{*7} Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HP SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HP R SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ⁸ , HP R SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ⁸ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or I Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁹ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ a/ 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2 80W <u>32W</u>	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stic EPSON and EXCEED YOUR VI trademarks of Seiko Epson Co Al other product names and of used herein are for identification
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{'6} Printer Languages ^{'7} Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions	Top, Bottom: Min. 3mm right, Ic Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes' ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ⁸ , HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC/T3730D / T5730D / T7730D ESC/R raster, HP-GL/2 ⁸ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8} D: TL ^{*8} , Adobe PostScript 3, Ad TL ^{*8} rint a / 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) bobe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VI trademarks of Seiko Epson do All other product names and of used herein are for identificatio are the trademarks or registere respective owners.
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print' ⁶ Printer Languages' ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature	Top, Bottom: Min. 3mm right, Ic Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes's SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2*, HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730D ESC/R raster, HP-GL/2*, HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or Ia Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 0.03W Operating: 10°C to 35°C, Stora	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ^{*8} G, HP-GL/2 ^{*8} , HP RTL ^{*8} D: TL ^{*8} , Adobe PostScript 3, Ad TL ^{*8} Adobe PostScript 3, Ad TL ^{*8} int a / 7 / 8 / 8.1 / 10 / 11 a ter / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022 19 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VU Virademarks of Selko Epson Co All other product names and of used herein are for identificatio are the trademarks or registere Epson disclaims any and all rig Projected images shown herei
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ³ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730D PDF, TIFF, JPEG, HP-GL/2 ³ , HP R SC-T3730D / T5730D / T7730D ESC/R raster, HP-GL/2 ³ , HP R SC-T3730D / T5730D/ T7730D ESC/R raster, HP-GL/2 ³ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows XP (32bit/64bit) / Vist Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cord	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ^{1%} G, HP-GL/2 ^{1%} , HP RTL ^{1%} D: TL ^{1%} , Adobe PostScript 3, Ad TL ^{1%} a/7/8/8.1/10/11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C densation), Storage: 5% to 8	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) bobe PDF 1.7 019 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Preproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VI trademarks or registerer respective owners. Epson disclaims any and all rig Projected images shown hereir The actual product design and Specifications are subject to cf
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print' ⁶ Printer Languages ^{:7} Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity Sound Pressure	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes' ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ^{*8} , HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ^{*8} , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or la Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cor	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁹ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ Adobe PostScript 3, Ad TL ¹⁸ a / 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C densation), Storage: 5% to 8 46dB(A)	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VU trademarks of Seiko Epson Co Al other product names and ot used herein are for identificatio are the trademarks or registere respective owners. Epson disclairns any and all rig Projected images shown hereir The actual product design and Specifications are subject to ch may vary between countries.
Margin (Roll Paper) ^{'3} Margin (Cut Sheet) ^{'3} Media Thickness Borderless Width Sizes (mm)' ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ^{*6} Printer Languages ^{*7} Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity Sound Pressure Sound Power	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ³ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730D PDF, TIFF, JPEG, HP-GL/2 ³ , HP R SC-T3730D / T5730D / T7730D ESC/R raster, HP-GL/2 ³ , HP R SC-T3730D / T5730D/ T7730D ESC/R raster, HP-GL/2 ³ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows XP (32bit/64bit) / Vist Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cord	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ^{1%} G, HP-GL/2 ^{1%} , HP RTL ^{1%} D: TL ^{1%} , Adobe PostScript 3, Ad TL ^{1%} a/7/8/8.1/10/11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C densation), Storage: 5% to 8	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) bobe PDF 1.7 019 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022 109 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VU trademarks of Seiko Epson Co Al other product names and ot used herein are for identificatio are the trademarks or registere respective owners. Epson disclairns any and all rig Projected images shown herein The actual product design and Specifications are subject to c' may vary between countries.P Epson offices for more informa
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity Sound Pressure Sound Power Dimensions & Weight	Top, Bottom: Min. 3mm right, le Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes' ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ^{*8} , HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730 ESC/R raster, HP-GL/2 ^{*8} , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or la Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cor	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE device connections) D: P RTL ¹⁹ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ Adobe PostScript 3, Ad TL ¹⁸ a / 7 / 8 / 8.1 / 10 / 11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C densation), Storage: 5% to 8 46dB(A)	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VI trademarks or registere respective owners. Epson disclaims any and all rig Projected images shown hereir The actual product design and Specifications are subject to cf may vary between countries. P Epson offices for more informar Apple, iPad and iPhone are tra
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity Sound Pressure Sound Power Dimensions & Weight Dimension (W x D x H), Stowed Weight	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes ⁵ SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2 ³ , HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC-T3730D / T5730D / T7730D ESC/R raster, HP-GL/2 ³ , HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows XP (32bit/64bit) / Vist Windows XP (32bit/64bit) Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 2.0W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cor 46dB(A) 6.3B(A) 1.365 x 499 x 975mm 118.1kg	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post ,610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ¹⁸ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ a/7/8/8.1/10/11 ater / 2008 / 2012 / 2016 / 2 80W 32W 2.0W 0.3W ge: -20°C to 40°C ndensation), Storage: 5% to 3 46dB(A) 6.4B(A) 1.645 x 499 x 975mm 136.8kg	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022 70W 32W 2.0W 0.3W 35% (no condensation) 50dB(A) 6.6B(A))	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Print Admin Serve Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stric EPSON and EXCEED YOUR VU trademarks of Seiko Epson Co Al other product names and ot used herein are for identificatio are the trademarks or registere respective owners. Epson disclairns any and all rig Projected images shown herein The actual product design and Specifications are subject to c' may vary between countries.P Epson offices for more informa
Margin (Roll Paper) ³ Margin (Cut Sheet) ³ Media Thickness Borderless Width Sizes (mm) ⁴ Connectivity Interface Wi-Fi Direct USB Host USB Direct Print ⁶ Printer Languages ⁷ Control Panel Mobile Solutions Memory Operating System Electrical Specifications Voltage Rated Current Power Consumption Operating Ready Sleep Standby Environmental Conditions Temperature Humidity Sound Pressure Sound Power Dimensions & Weight Dimension (W x D x H), Stowed	Top, Bottom: Min. 3mm right, k Top: Min. 3mm, Bottom: Min. 1 Roll: 0.07mm – 0.8mm, Cut Sh 1118, 1030, 914, 841, 728, 700 USB 3.0, Ethernet (100BASE-T Wi-Fi Direct (Simple AP, up to 8 Yes's SC-T3730D / T5730D / T7730 PDF, TIFF, JPEG, HP-GL/2*, HI SC-T3730D / T5730D / T7730D Epson Scanned PDF, TIFF, JPE SC/R raster, HP-GL/2*, HP R SC/R raster, HP-GL/2*, HP R SC/R raster, HP-GL/2*, HP R 4.3" Touch Screen Epson Smart Panel, Apple AirP 4GB + 960GB (Option SSD) Windows XP (32bit/64bit) / Vist Windows Server 2003 SP2 or la Mac OS X 10.6.8 or later AC 100-240V 50/60Hz 3.4-1.6A 75W 32W 0.3W Operating: 10°C to 35°C, Stora Operating: 20% to 80% (no cord 46dB(A) 6.3B(A) 1,365 x 499 x 975mm	eft: Min. 0mm 2.7mm right, left: Min. 0mm eet: 0.07mm – 0.8mm, Post 610, 594, 515, 508, 500, 433 X/1000BASE-T), Wi-Fi (IEEE: device connections) D: P RTL ¹⁹ G, HP-GL/2 ¹⁸ , HP RTL ¹⁸ D: TL ¹⁸ , Adobe PostScript 3, Ad TL ¹⁸ Adobe PostScript 3, Ad TL ¹⁸ Adobe PostScript 3, Ad TL ¹⁸ Mathematical Additional Addi	er Board: 0.8mm – 1.5mm 2, 406, 356, 330, 300, 254 802.11b/g/n) obe PDF 1.7 019 / 2022 19 / 2022 10 / 202 10	OPTIONS Roll Feed Spindle (24") Roll Feed Spindle (24") Roll Feed Spindle (36") Roll Feed Spindle (44") SSD Unit (960GB) Epson Print Admin Epson Edge Print Pro CONSUMABLE Maintenance Box Borderless Maintenance Printer Cutter Blade Cleaning Stick @2023 Epson Singapore Pte L Reproduction in part or in whol permission from Epson, is stic EPSON and EXCEED YOUR VI trademarks of Seiko Epson Co All other product names and of used herein are for identification are the trademarks or registere respective owners. Epson dilcatims any and all rig Projected images shown herein The actual product design and Specifications are subject to c' may vary between countries. P Epson offices for more informa Apple, iPad and iPhone are tra registered in the U.S. and other

Max supported size depends on the max supported width of printer. Not supported for USB memory with an encryption or security function. Not-guarantee connected through USB memory reader/writer

Stor cable. T3730DE: Epson Scanned PDF, TIFF, JPEG, HP-GL/2, HP RTL T3730DE: ESC/P raster, HP-GL/2, HP RTL. mmended to do test before purchasing printer if HP-GL/2 or HP RTL direct print is used, because whether supported or not depends on application or data.







C12C937711 C12C937671 C12C936171 C12C936671 7110574 s 7111310 185105401

C13S210115 C13S210116 C13S210117 C13S090013

All Rights Reserved rithout the writter rohibited. ON are registered company names

rposes only and demarks of their in those marks.

e simulations. htents may vary. ge without notice and check with local

arks of Apple Inc. intries. App Store is

nformation correct at time of printing. Printed March 2023

IT'S IN THE DETAILS.

Impressive Precision

Exceptional accuracy in every print with PrecisionCore MicroTFP printhead technology, down to the finest details.

Reliable Productivity Reduce downtime with higher capacity inks and dual rollers for increased non-stop productivity.

LARGE FORMAT TECHNICAL PRINTERS SURECOLOR SC-T3730E/T3730DE/T3730D/ T5730D/T7730D

CUTTING EDGE FOR HIGH VOLUME AND SECURED PRINTING.

SC-T3730E SC-T3730D/DE (24") (24") SC-T7730D (44")

Exceptional performance, spectacular precision, and true-to-life colours from your SureColor printer.


Be ready to amplify your ideas and showcase them in spectacular precision with Epson's new SureColor technical printer series. Equipped with PrecisionCore MicroTFP printheads for precise printing and vivid colour-accurate prints using the UltraChrome XD3 inks. On top of versatile printing capabilities, the printers come equipped with user-friendly functions and secured management for businesses to enjoy a seamless printing process. Get ready to be mesmerised by the exceptional line printing accuracy and top-class efficiency.













Secured Management Supports print authentication using an ID card reader* and remote device management with print volume tracking.

*Users would be required to set up a Windows server to use Epson Print Admin.

LARGE FORMAT TECHNICAL PRINTERS SURECOLOR SC-T3730E/T3730DE/T3730D/T5730D/T7730D

Even when the tiniest details matter, you can trust the SureColor technical printers to help your businesses deliver remarkable results in every print. Achieving outstanding accuracy even for the finest lines with PrecisionCore printhead technology and an all-new chassis design, the printer also uses a range of top-class technology such as Variable Size Dot Technology to deliver vibrant, crisp prints at fast print speeds.

PRECISIONCOR

Precise, Accurate And Compact

PrecisionCore Micro TFP Printhead

The larger 2.64" printheads deliver increased productivity from faster speed coupled with industry-leading precise droplet formation. Using the variable-sized droplets technology, businesses can expect crisp line accuracy, sharp text and vibrant photo quality in all their prints.



Self-Encrypting SSD

With the self-encrypting SSD, enjoy improved performance and handling of large print data. The 960GB additional storage memory allows the capability to create folders for PC-less production printing with its data secured by

AES-256 and protected by a TPM chip. Users can also opt to set up password protection for specific folders in the in-built storage.



Improved Media Handling

With dual-roll* capability, operators' workload is reduced and productivity is maximised. Using the function for automatic selection of different media types and sizes, operators can also use the second reel as a take-up reel for unattended non-stop operation. Automatic roll feed and paper edge detection sensor allows users to load paper with ease and convenience.

*SC-T3730E does not have a dual roll function.





Take-up Reel

Automatic Roll Switch

Outstanding Print Quality and Performance

Achieving the finest details both on paper and special media, the UltraChrome XD3 inks with new red ink produce prints in rich and vivid colours, especially for POP materials. Featuring six colours, including the all-new gamut-expanding red ink, businesses can print everything from everyday technical drawings to graphics and renderings. Water, smudge and faderesistant, this cutting-edge pigment ink set produces durable, vibrant, and long-lasting prints.



To suit different needs, ink cartridges come in three different ink capacities:

110ml	Photo Black Cyan Magenta Yellow Matte Black Red	C13T51F100 C13T51F200 C13T51F300 C13T51F400 C13T51F800 C13T51FF00
350ml	Photo Black Cyan Magenta Yellow Matte Black Red	C13T50Y100 C13T50Y200 C13T50Y300 C13T50Y400 C13T50Y800 C13T50YF00
700ml	Photo Black Cyan Magenta Yellow Matte Black Red	C13T50R100 C13T50R200 C13T50R300 C13T50R400 C13T50R800 C13T50R800 C13T50RF00

Improved Performance with Adobe PostScript*

Delivering prints with improved accuracy for transparent and overprint layers, as well as faster processing time for PDF and PS output. This includes additional support for printing of EPS, PDF, PS, TIFF, JPEG and Cals-G4 data.

*SC-T3730E and T3730DE does not come with Adobe Postscript




Not accurate

Ease-Of-Use Features

Full Frontal Operation Design

Intuitive front loading improves convenience for operators with an innovative full frontal operation design. For non-stop productivity and increased efficiency, operational downtime is reduced with high-capacity ink cartridges, storage space for consumables, and dual rollers. Operators can easily check printer status on the 4.3" LCD touch screen, and print directly from USB storage devices.

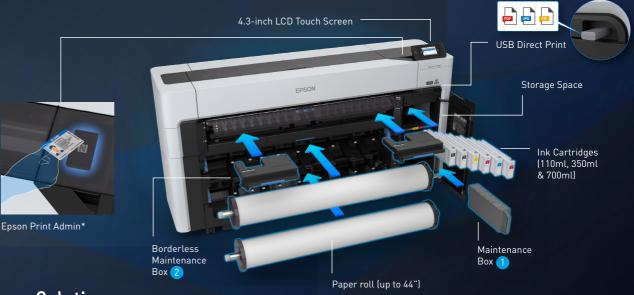

Software Solutions

Print Management

Epson Print Admin* is a centralised print management solution that creates a secure printing and scanning environment through user authentication. Improve convenience with document distribution and pull printing, set rules and guota for better cost savings. A serverless version is available for organisations that require simple print management.

*Epson Print Admin requires a Windows Server. Epson Print Admin Serverless requires SSD Option

Epson Smart Panel

Print directly from mobile devices with the Epson Smart Panel app. Transform your iOS[®] and Android[™] mobile devices into an intuitive control centre. Conveniently set up, monitor, print, and scan on Epson printers. With a variety of configuration features, you can customise the app into an all-in-one management tool to support your needs.



Accurate



Fleet Management and Production Monitor

With Epson Device Admin, operators can easily deploy and monitor the status of a fleet of mixed Epson devices. The IT admin can automatically update, troubleshoot, provide timely support, and also generate reports for accountability and cost saving activities. Through internet connection, operators can also monitor the live production status of equipment with Epson Cloud Solution PORT. Improve efficiency, optimise printing workflow, and reduce downtime by receiving accurate support with remote troubleshooting from Epson technical support.

Epson Edge Print Pro

An easy to use RIP software by Epson to provide the best print quality by maximising the printer's capability with advanced imaging processing technologies. High print performance and accuracy with Adobe PS engine to process PostScript data, the software is able to handle job and colour management for improved efficiency and colour accuracy.

