LARGE FORMAT PHOTO PRINTERS

SURECOLOR SC-P5330/P6530E/P6530D/P7530/ P8530D/P8530DL/P8530DM/P9530/P20070/P20530



SPEARHEADING INDUSTRIAL STANDARDS IN PHOTOGRAPHIC REPRODUCTION.

Impeccable print quality in spectacular accuracy with Epson's P-series printers.

When you require exemplary prints that are top-class in quality, precision, and colour accuracy, trust Epson's P-series printers to weave their magic and deliver just what you need. Equipped with Epson's proprietary PrecisionCore™ MicroTFP printheads, the SureColor P-series photographic printers revel in their precise and reliable print productivity. Coupled with colour-accurate reproduction using genuine UltraChrome PRO 6 inks, you can now get gallery-quality picturesque prints easily and efficiently.

ENGINEERED FOR GOOD

Highest Standards in Print The additional grey ink in the UltraChrome PRO 6 inks offers smooth and natural colour gradation in every print.

Installation Flexibility

Flat top design allows for easy placement of printer in challenging and narrow spaces, giving businesses more options in installation.

EPSON

Find out more at www.epson.com.sg/gobig-photo

f EpsonSingapore 🙆 EpsonSingapore 🜔 EpsonSoutheastAsia in Epson Singapore 🛃 EpsonSingapore

Epson Singapore Pte Ltd Epson Customer Care Center 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.











Boosted Efficiency

Improved print speeds and continuous automatic printing with dual rollers* help ensure high productivity with minimal downtime.

Experience the Magic


Epson SureColor P-series photographic printers deliver superior detail-accurate images thanks to the latest colour printing technologies. With Epson's PrecisionCore™ Thin Film Piezo (TFP) printhead and UltraChrome[™] all-pigment ink sets, uncompromising image consistency and immaculate colour quality are evident in every print. The P-series printers are integrated with industry-leading software solutions, which create seamless work processes that increase efficiency for businesses while meeting the demanding needs of the photo, proofing and graphic arts industry.



Unmatched Precision

Epson's PrecisionCore[™] technology delivers unparalleled colourmatching capability in every print, enabling ultra-precise control of dot size, shape and placements with its revolutionary printhead. The print nozzles can also produce a wide variety of droplet sizes, allowing fine detail and quick filling of larger areas at a single pass.

PRECISIONCORE

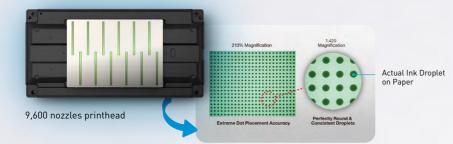











SC-P8530D/P8530DL/P8530DM




P6530E/P6530D




Latest Generation of **Professional-Quality Pigment Inks**

Epson's revolutionary Ultrachrome HD inks ensure colouraccurate prints, delivering stunning vibrancy in every photo. With the new addition of Photo Black and Matte Black inks, images are printed with greater colour depth; especially when printing black and white images. In addition, the improved black density and higher D-Max value, the new black ink is 1.5 times denser than the previous ink formulation, providing significant improvements to the overall contrast ratio and optical clarity.

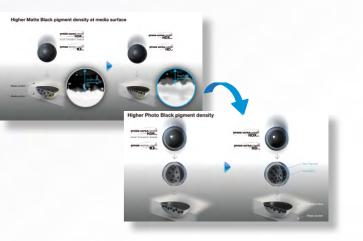

SC-P20530

Photographic Perfection and Accuracy

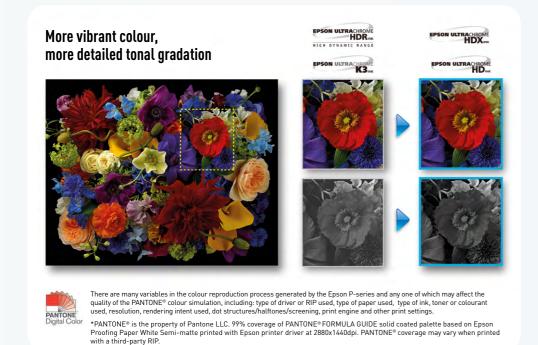



Utilising a three-level black ink technology that simultaneously employs Grey, Light Grey and Light Light Grey, the innovative Epson UltraChrome pigment inks produce brilliant black density and grey balance in sharp definition. On the media surface, the UltraChrome HDX, HD matte, and photo black inks achieve a much higher pigment density, making sure that the pigments do not penetrate too deep when printing on third-party media.

With the newly-added Violet ink[^], the Ultrachrome HDX ink achieves a wider colour gamut, allowing it to hit spot and client-specific colours accurately, achieving an unparalleled 99% max certified PANTONE® coverage*. The various ink configurations also aid in achieving impeccable print quality for both colour and monochrome reproductions.

[^]For selected models

Epson AccuPhoto HDR Screening

ight Ligh

Wider colour coverage with

dark-colour tonal gradations

detailed reproduction of



vivid colour reproduction Less chance to print monochrome images






 Decent (more than 4-colour colour coverage with more detailed reproduction of dark-colour tonal gradations Advanced ten-colour screening algorithm delivering prints with superior colour and clarity, producing extremely fine blends and subtle photographic transitions.

With Epson AccuPhoto HDR Screening, each print contains extremely accurate highlight-toshadow details with no visible photographic graininess.

Efficient Workflow Solution

Epson Colour Calibration Utility

To work more efficiently across multiple networked printers, the P-series printers are equipped with Epson Colour Calibration Utility, which measures colour density and concentration, allowing printer network management from a central point. This makes calibrating your printers easier and faster as the derivatives can calibrate their colours based on the base printer by transferring the colour chart, increasing overall productivity.

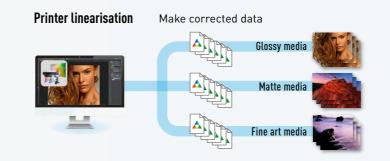

Epson Print Layout Software


This plug-in for Adobe Photoshop, Lightroom, and Nikon ViewNX-i includes a set of template layouts and supports ICC soft proofing, colour production, preview, custom media registration and panorama layouts. Along with a set of colour modes, including advanced black and white, to create different finishes and moods. The software operates via intuitive and consistent controls including slider bars and colour wheels for precise and easy adjustments.

Custom media registration

One-click selection of custom media settings





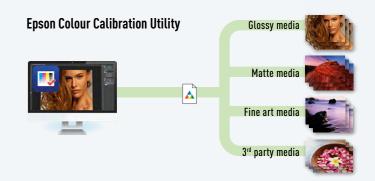

The Efficient Remote Monitoring System for Large Format Printers



Epson Cloud Solution PORT

Managing your printers is made easy and hassle-free with Epson's Cloud Solution PORT. Operators can monitor equipment and printer fleet across different sites from production floor or remotely, on PC or a mobile device without fuss. Boost operational efficiency by controlling, analysing and managing your printer fleet centrally from one intuitive interface while troubleshooting any rare issues.

Benefits of Epson Cloud Solution PORT:

Real-Time Fleet Monitoring & Issue Management

Epson Production Monitor reduces printer fleet downtime by providing real-time updates on print job errors and disruptions, and allows remote monitoring of your fleet's status and issues from iOS and Android devices.

Enjoy cost transparency

With our dynamic user-friendly Cost Reporting feature, you can easily check and customise expenses, and adjust views effortlessly for multiple units and specific criteria.

Enjoy peace of mind with end-to-end security

Epson is committed to developing robust and secure solutions, engaging service providers that meet global security standards and safeguarding our customer's data privacy.







Brillance in Every Print

A compact photo printer that does not compromise on quality, the SC-P5330 is your perfect solution for impeccable colour reproduction in every print. Utilising Epson's Micro Piezo[®] printhead and UltraChrome[™] PRO 10 all-pigment ink set, every image is dynamic and vibrant, with detailed consistency in spectacular colours.

Consistently Vivid

Experience an upgraded level of image perfection with the SC-P5330, which utilises the UltraChrome[™] PRO 10 ink set with Violet for enhanced blue reproduction and a wider colour gamut. This synergises perfectly with the printer's Carbon Black and Black Enhance Overcoat print modes that provide higher levels of black density and increased contrast with smooth gradations.



Dedicated Black Ink Channels

Achieve continuous printing with the dedicated Matte Black and Photo Black ink channels.







Convenience Driven

Epson ColorBase Software

An easy to use colour calibration tool that meets the demands of photographers and graphic arts professionals, Epson ColorBase provides consistent colour quality throughout the printing process.

Supporting colour calibration from print to print and/ or printer to printer, Epson ColorBase makes print management easy and reliable. It enhances remote printing applications with critical colour calibration requirements and keeps a history of calibration files for easy reference.

Epson Print Layout Software

With easy access to all major functions, the Epson Print Layout software also helps to manage print layouts and colours with standard bundled industry-leading RIP software. Coupled with high-precision media feed technology, operators are ensured of smooth operation of their printers even when unattended.

Archival Prints

Standing the test of time, our Fine Art prints revel in its archival properties with colours lasting up to 60 years of light fastness^{*}.



*Based on JEITA CP-3901A's standard for the measurement: glossy A4 paper, temperature at 23°C and humidity at 50%.




Explosion of Vivid Colours With Efficiency and Excellence



Widest Colour Gamut

Equipped with Epson's newly-developed UltraChrome PRO 12 inks, the SC-P7530 and SC-P9530 delivers a wide range of colours, reproducing every detail with unrivalled brilliance and accuracy. With the all-new 2.6-inch PrecisionCore MicroTFP printhead, these printers boast a productive workflow with dedicated channels for Matte and Photo Black inks.



Combining efficiency and quality, the SC-P7530 and SC-P9530 are fitted with PrecisionCore MicroTFP printhead, printing at 300dpi resolution with 12 channels. With smoother gradations and accurate texture reproduction, image quality is enhanced by Matte Black, Photo Black and Light Light Black inks, which are achieved through black enhancement overcoating technology.

Catering to creatives that demand the most outstanding standards in printing, the SC-P7530 and SC-P9530 deliver perfect colour reproduction by leveraging on Epson's new UltraChrome PRO 12 pigment inks and PrecisionCore MicroTFP printhead technology. Ideal for Photo, Fine Art, Graphic Design and Proofing applications, be amazed by the explosion of vibrancy and precision in every print.





SC-P7530/P9530

Wide Range of Applications

Designed to print with a wide range of applications, professional photographers, fine art reproduction, packaging and contract proofers can now easily print with convenience. Even those that demand the highest print quality can unleash their creative freedom and print on a wide variety of media, including fine art papers, canvases and photo papers, without compromising on quality. The SC-P7530 and SC-P9530 photo printers support printing of up to 44" width media.

*Applicable to SC-P9530 only.



Designed to Last

Epson's SC-P7530 and SC-P9530 photo printers come with additional features such as a sealed roll media door for a dust-proof design and an integrated LED light to view projects while printing.



Deliver Top Notch Gallery-quality Prints





Epson's SureColor SC-P6530E and SC-P6530D employ an unprecedented level of innovative technology. Coupling PrecisionCore[™] technology with UltraChrome PRO 6 Inks, high accuracy and resolution can be achieved allowing the finest details to stand out.

Accurate Colour Reproduction

Delivering superb image quality with true-to-life colour accuracy, Epson's UltraChrome PRO 6 inks bring prints to a whole new level of professionalism.

Print That Last

Epson's UltraChrome PRO 6 inks are water-, smudgeand fade-resistant, allowing prints to be durable and long-lasting.



Water and smudge resistant

Fade resistant

Seamless Operation For SC-P6530D only

Operating with top-tier reliability, the Epson SureColor SC-P6530D saves time and manpower with the Automatic Roll switching, simplifying the loading of new media rolls. Minimising downtime, the seamless operation ensures continuous printing and smooth operation.



SC-P6530E/P6530D

Epson Smart Panel

With the Epson Smart Panel app, users can set up, monitor, print and scan through an iOS or Android device.

Conveniently set up, monitor, print, and scan on your Epson printers and easily commence print jobs from your fingertips. With a wide variety of configuration features, you can also customise the app according to your requirements into an all-in-one management app.





Automatic Roll-Media Feed



Automatic Roll Switch



Transform Ideas Into Vibrant True-To-Life Prints



Delivering stunning picturesque prints in striking colours, Epson's SC-P8530D/P8530DL/P8530DM transform your ideas into vivid largerthan-life pieces of art with detailed precision. With high installation flexibility and seamless work process, businesses can now increase their productivity effortlessly with Epson's large format photographic printer.

Gallery Standards

6-colour ink set delivers exceptionally wide colour gamut and high black density, producing photographic prints that are of gallery standards.



Photographic prints

Black-and-White prints

Up to 44" Wide Dual Roll Design

Management of prints is much easier with the dual roll 44" wide-format media configuration that maximises productivity and increases efficiency.





SC-P8530D/DL/DM

Wide Variety of Media

Professional printing can be done on a variety of media, such as artist canvas or premium photo papers.



Matte media

Gloss media


Smoother Gradation for Professional Perfection

Utilising the innovative two-level black ink technology that simultaneously employs Photo Black and Matte Black, Epson's UltraChrome PRO 6 inks produce rich true-to-life black density and grey balance to ensure top-notch quality in every print. Generating smooth gradients, transitions, and neutral grayscale in every photo.





Unparalleled Vividness and Productivity

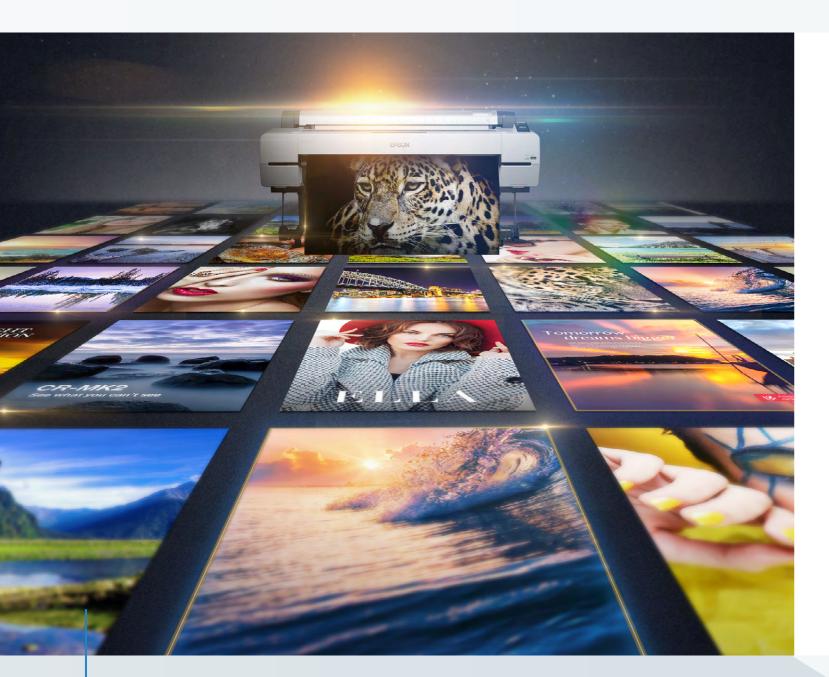

Epson's SC-P20070 photo printer leads the industry with its high performance, reliable and swift printing. Equipped with the revoluntionary PrecisionCore MicroTFP printhead and UltraChrome[™] PRO ink, experience magnificence in every print at affordable running costs.

State-of-the-Art Standards

No more worrying about high-volume quality print at fast speeds. Thanks to Epson's UltraChrome PRO archival ink technology and the innovative PrecisionCore MicroTFP, expect remarkably vivid and sharp prints that are gallery standards and last up to 200 years. With four levels of grey, your prints will feature accurate transitions with very low grain even at the fastest print modes.





Cost-Effective Production

Operating with reduced power consumption, businesses stand to gain with the reliable SC-P20070 printer as it requires minimum maintenance. Coming with large, cost-effective ink cartridges of up to 700ml, operators can also take advantage of the various configurations, such as an optional Postscript, Auto Take-Up system, and user selectable warranty and support packages.



SC-P20070

Efficiency Secured

Built to minimise downtime during printing, the SC-P20070 comes with a new media feeding system that can keep up with high-volume prints without compromising on quality. Achieve maximum output with the Realtime Media Adjustment and Feedback System, and Media Inductive Roller System, allowing the printer to operate smoothly even when unattended.



Media feed rollers

Media inductive rollers


Range of Media



The SC-P20070 is a floor-standing printer with a 64" (1,626mm) wide carriage and improved flexible media handling, supporting basic bond paper, photo paper, transparent film, translucent back-lit and specialist synthetic media. It also accepts roll media via a spindle mounting with integrated tension adjustment and has a high-speed auto-cutter.



Industry-Grade Precision Printing

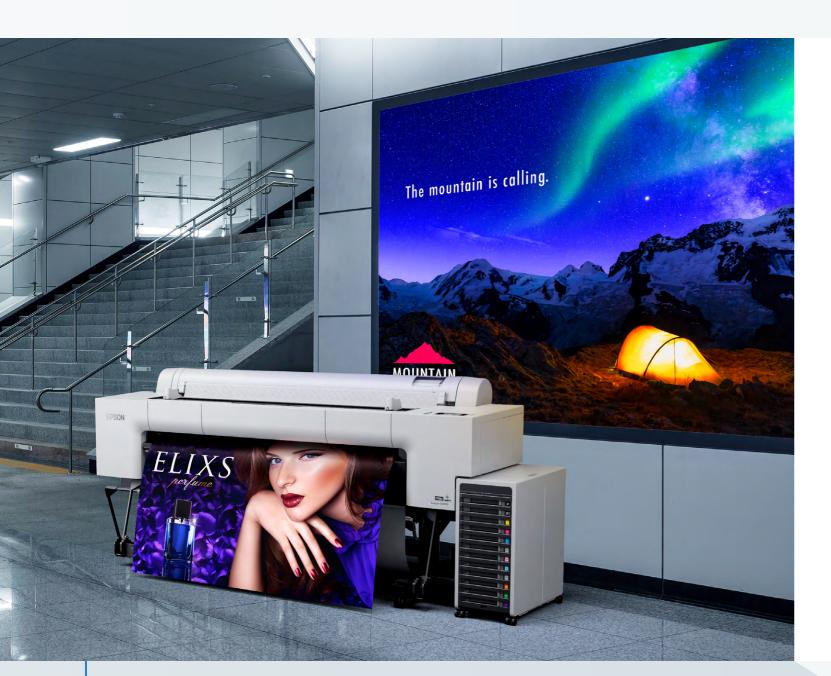

The Epson SureColor SC-P20530 is a 64" large-format printer designed for professional photographers and fine art reproduction. It features PrecisionCore MicroTFP technology and a 12-colour UltraChrome PRO 12 ink set for exceptional detail, colour accuracy, and durability. With advanced media handling, high-capacity ink, and seamless connectivity, it ensures superior print quality and productivity for high-end print shops.

Wider Colour Gamut with 12-Colour Ink Set

Utilising UltraChrome PRO 12 ink with the addition of Orange, Green, and Violet colours, the SC-P20530 offers a wider colour gamut, making it ideal for highly accurate and vibrant fine art and photographic prints.





12-colour ink set

PrecisionCore MicroTFP Printhead

With two additional lines supporting the 12-colour ink set and 9,600 nozzles, this printer features dedicated channels for PK and MK black, reducing both printing time and ink consumption for greater efficiency.



Two additional lines support the 12-colour ink set.

99% PANTONE® Coverage

Achieve unparalleled colour accuracy and impeccable print quality for both colour and monochrome reproductions.



SC-P20530

Superior Black Enhancement

Enhanced black reproduction with Black Enhanced Overcoat (BEO) mode uses Light Grey ink to improve black density, contrast, and tonality, while reducing bronzing^{*}, making it ideal for high-quality black and white fine art photos.

*Only on glossy paper.



Overcoat OFF

Overcoat ON

Increased Productivity and Usability

Boasting a 1.6L bulk ink system for continuous printing with fewer changes and an intuitive 4.3-inch touchscreen display, this printer offers businesses both operational efficiency and reduced environmental impact.





1.6L Ink Packs



_

_

INK	INK & OPTIONS COMPATIBILITY CHART						
PRINTE	R MODELS	SC-P5330	SC-P6530/P8530/P8530D	SC-P8530DL	SC-P7530/P9530	SC-P20070	SC-P20530 NEW
						LOAURIOUS SPA	FLIXS
MAINTE	NANCE BOX	T55V / C13T619000	SC-P6530/P8530: T6997 / C13S210116 SC-P8530D: S210115 / C13S210115	S210115 / C13S210115	T6997 / C13T699700	T6193 / C13T619300	T6193 / C13T619300
INK TYF	PE (T-CODE / MODEL NUMBER)	T55V	T50S	T50S	T44V (350ml) / T44N (700ml)	T44N	T56J
	Photo Black 🛛 🕒	C13T55V100					
lge	Cyan 🔷	C13T55V200					
tric	Vivid Magenta 📃 📃	C13T55V300					
Car	Yellow 🦳	C13T55V400					
k	Light Cyan 📃	C13T55V500					
	Vivid Light Magenta 📃 📃	C13T55V600					
200ML Ink Cartridge	Grey	C13T55V700					
8	Matte Black	C13T55V800					
3	Light Grey	C13T55V900					
	Violet Grev	C13T55VD00	C13T48YE00				
-	Grey Photo Black				C13T44V100		
-			C13T48Y100 C13T48Y200		C13T44V100 C13T44V200		
lge	Vivid Magenta / Magenta		C13T48T200 C13T48Y300		C13T44V200 C13T44V300		
tric	Yellow		C13T48T300		C13T44V400		
Cal	Light Cyan		0101401400		C13T44V500		
h	Vivid Light Magenta				C13T44V600		
	Light Grey				C13T44V700		
Σ	Matte Black		C13T48Y800		C13T44V800		
350ML Ink Cartridge	Light Light Grey				C13T44V900		
~~	Orange 🔴				C13T44VA00		
	Green 🔴				C13T44VB00		
	Violet				C13T44VD00		
-	Photo Black		C13T48R100		C13T44N100	C13T44N100	
-	Light Light Grey		0407/07000		C13T44N900		
a -	Cyan •		C13T48R200		C13T44N200 C13T44N300	C13T44N200	
Ink Cartridge	Vivid Magenta / Magenta 🔶 Yellow –		C13T48R300 C13T48R400		C13T44N400	C13T44N300 C13T44N400	
art	Light Cyan		0131401(400		C13T44N500	C13T44N500	
k C	Vivid Light Magenta				C13T44N600	C13T44N600	
<u> </u>	Light Black / Grey				C13T44N700	C13T44N700	
	Matte Black		C13T48R800		C13T44N800	C13T44N800	
700ML	Dark Grey 🔴					C13T44NA00	
2	Grey		C13T48RE00			C13T44N900	
-	Orange 🔴				C13T44NA00		
-	Green 🔴				C13T44NB00		
	Violet				C13T44ND00		
-	Photo Black			C13T53J100			C13T56J100
	Cyan • Vivid Magenta •			C13T53J200			C13T56J200
ack -	Vivid Magenta Yellow			C13T53J300 C13T53J400			C13T56J300 C13T56J400
1600ML Ink Pack	Light Cyan			6131333400			C13T56J500
	Vivid Light Magenta						C13T56J600
Į	Grey			C13T53J700			C13T56J700
6	Matte Black			C13T53J800			C13T56J800
09	Light Grey						C13T56J900
-	Orange 🔴						C13T56JA00
	Green						C13T56JB00
	Violet 🔹						C13T56JD00

SPECIFICATIONS

Part Heart Moor Pore Partnersd Processing Bio Nozaces 100	MODEL NUMBER	SC-P5330	Dimensions and Weight	MODEL NUMBER	SC-P7530
Share		C11CL14403			C11CH12402
 Marken Kanner Kanner			Weight: Approx. 53 kg		
Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control Excel Control					PrecisionCore Inkjet Tech
Brain Brain Marcan Televolution Brownel (d) (m) Brain Marcan Televolution Brownel (d) (m) Brownel (d) (m) <t< td=""><td></td><td></td><td></td><td>Print Head</td><td>PrecisionCore MicroTFP</td></t<>				Print Head	PrecisionCore MicroTFP
Char Districtly (Solid 1) Districtly (Solid 1) <thdistrictly (solid<br="">1) Districtly (Solid 1)</thdistrictly>	Nozzle Configuration			Nozzle Configuration	9,600 Nozzles (800 nozz
Advances Advan				Maximum Resolution	
 Harrin Periodia Section Harrin Periodia Harrin Periodia					3.5pl
Name Specification Specification Specification And Component Specification Based Meeters (20 x 100 pc) 20 minutes (20 x 100 x		· · · ·			
Trint Ruccatif Grant Multic 2014, 2014, 2014, 2014, 2014, million manage Mark Control, Marker, Carlon, Marker, Markanan, Marker, Marker, Marker, Marker, Marke		1.5pl		Print Speed	
Date Mode Loss Mit Mode Loss Mit Mode Date Mode Distance Procession Proce	Printing Specifications				122 sec (Default) Premiu
 Charles Marken Balanseen Caracter Marken Balanseen Caract	Print Speedr ^{*1}		863mm 1 134mm		Photo Paper 170gsm A1
Marc					
Link Accuracy 2012. The specified work of length or all disting and length or all disting and work of length					
nk system Baret file Baret file Web State nc Data Group Baret file Baret file Baret file nc Data Group Baret file Baret file Baret file page file Baret file					UltraChrome PRO 12 Ink
 March March March		$\pm 0.2\%$ of the specified vector length or ± 0.26 mm (whichever greater)		Colour	Photo Black, Cyan, Vivid
nk aland hanne bild Charam H2O Din K. Spen Vale Magnah, Yabas, Malie Back, Groy, Ligit Groy, Back Malie Back, Back Malie Back, Back Malie Back, Back Malie Back, Back Malie					Vivid Light Magenta, Ora
Oder Prior Black, Court, Work Magning, Malor,				Ink Capacity	
 And Construction of Construction					Ink Cartridge
K Caractive Softi Biordials / 200ml Procession Procession <th< td=""><td>Colour</td><td></td><td></td><td>Paper Handling</td><td></td></th<>	Colour			Paper Handling	
K Case (Section Propertion and speer families) Institution Institution Milling Califormic (Section Propertion Section Properties (Section Properties Section Properties Properties Section				Paper Path	Roll Sheet (Manual)
Space Factor Find C Construction Space Factor Find C				Paper Feed Method	
Stor P Fail Pail, Call Stock (manual lock), Point Power (manual lock), Point Casolic + inter in casespa 0004 Pail, Call Stock (manual lock), Point Power (Manual Lock), PSC Casolic + inter in casespa 0004 Pailer Field, Mind Pailer (Manual Lock), PSC Power (Manua Lock), PSC Power (Man		Ink Cartridge	WHAT'S IN THE BOX	Maximum Roll Diameter	2" Roll core-media: Max
Apple Fail Point of 2002 (mining and 2002 (m				Maximum Roll Weight	6kg
Maxmun Hall Danuel ¹² 2 <u>Link page Name (13) mm (2) Th (14) mm (2) Jake (27) mm (24) Jake (27) Mm (24) Jake (27) Jake</u>					254 – 620 mm
Addred in 101 Linkheiter gene Thickness <u> <u>Andred wind</u> body <u> Andred wind</u> body <u> <u>Andred wind</u> body <u> Andred wind</u> body <u> <u>Andred wind</u> body</u> <u> <u>Andred wind</u> body <u> <u>Andred wind</u> body</u> <u> <u>Andred wind</u> body</u> </u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u>				Paper Width (Cut Sheet)	
Space State Space State Space State Space State State Space State					0.08 – 0.5 mm
Apper Theorees Model 1, NUT_1, 1011, Address Jack (USL 1), 1022 (UTL X21) Page cases in code Data ad grade Data ad g	Paper Size			Paper Thickness (Manual)	Cut Sheet: 0.08 – 1.5 mr
Manual Cut Spect 0.08 - 0.08m, Dermit Board 0.09 - 1.0mm - Boothers parting spacer - Boothers parting spacer Musicinam Printable Langth - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Star Copport - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Star Copport - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Star Copport - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Star Copport - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer - Boothers parting spacer - Boothers parting spacer - Boothers parting spacer Operating Spacer				Connectivity	
Merchann Printable Langin Merchann Printable Langin Merchann Printable Langin Merchann Printable Langin Merchann M	Japer Thickness			Interface	Super-Speed USB*1, 100
Maintam Protable Langh* Bail Paper: En., Cal Sheet: Eliform, Bole Paper Maintam Protable Langh* Protocol Pr			 Borderless printing spacer 		1000BASE-T
Wachtight initiation Harringen (Ling) Herrory 2013 Statistics Statistics Statistics Merrory 2013 Statistics Statistics Statistics Statistics Merrory 2013 Statistics Statistics Statistics Statistics Merrory Statistics Statistics Statistics Statistics Merrory Statistics Statistics Statistics Statistics Merrory Statistics Statistics Statistics Statistics Merrory Statistics Statistics Statistics Merrory Statistics Merrory Statistics Statistics Merrory Statistics Merrory Statistics Merrory Statistics Statistics Merrory Merrory Merrory Statistics Merrory Statistics Statistics Merrory Merrory Merory Merrory Merrory <t< td=""><td>Ma 'aa aa D 'adabda da aadb *3</td><td></td><td></td><td>Printer Language</td><td>ESC/P raster</td></t<>	Ma 'aa aa D 'adabda da aadb *3			Printer Language	ESC/P raster
Bit Capacity, Max, Sheets SSR Capacity, Max, Sheets Capacity, Max, Max, Max, Max, Max, Max, Max, Max		Roll Paper: 18m, Cut Sneet: 610mm, Poster Board: 610mm		Memory	
ASP Cases/tr. Max. Sheets. ASP Cases/tr. Mar. Sheets. <th< td=""><td>Borderiess</td><td></td><td></td><td></td><td></td></th<>	Borderiess				
Description Proceeding with the statute process of the statut	ACE Canadity May Chaota			PC System Requirement	Windows 10, 8.1, 8, 7, V
Cick Scroom 4.3° Colour LCD & Electrostatic Touch Scroon Mac CS X 10.6.5 or Cick Scroom SuperSpectral QS SuperSpectral QS SuperSpectral QS Windows 7, 8, 1, 10, 11 or later Windows 7, 10, 11 or later Window		ASF Casselle: Main paper 250 sheels (A4-A2/US-C)			Windows Server 2019/20
Connectivity Interfaces SuperSpeed USP*, 108ASE-T/100BASE-T/IEEE802,11b/g/r/vec ESC/P rastar SuperSpeed USP*, 108ASE-T/100BASE-T/IEEE802,11b/g/r/vec ESC/P rastar Utily Software Organization Conversion Partiar Language Windows 7, 8, 8, 1, 0, 11 or itster Windows 7, 8, 8, 1, 0, 11 or itster Windows 7, 8, 8, 1, 0, 11 or itster Vector Conversion Partiar Beguinement Windows Swist Mark Coru Core 2 Duo 306GHz or more, Memory: Memory more than 46B; HDD. Free Space more than 612GE* Windows 7, 8, 8, 1, 0, 11 or itster Windows System Requirement HDD. Free Space more than 612GE* System Requirement HDD. Free Space more than 612GE* Windows - Printer Driver - Epson/Nel Print - Epson/Nel Print 2, 2019 Epson Markai Beson Print 2, 2019 Essot Space more than 612GE* Windows - Installer Package (Installer - Spann Merid Ser - Epson Markai Back Admin - Device Status System (DSS): FESON Suita Da Orde Controller Medica Package (Installer - Spann Merid Ser - Epson Markai Back Admin - Device Status System (DSS): FESON Suita Da Orde Controller Meridows - Installer Package (Installer - Software Updater Firmware Updater - Adoba (CO Prolls - LPP Accounting Tool Markai Back Admin Tool - 2007, K000 Meridows - Installer Package (Installer - Software Updater Firmware Updater - Adoba (CO Prolls - LPP Accounting Tool Markai Back Admin Tool - 2007, K000 Meridows - Installer Package (Installer - Software Updater Firmware Updater - Adoba (CO Prolls - LPP Accounting Tool Markai Back Admin Tool - 2007, K000 Meridows - Installer Package (Installer Software Updater Firmware Updater - Adoba (CO Prolls - LPP Accounting Tool Markai Back Admin Tool - 2007, K000 Meridows - Installer Package (Installer Software Updater Firmware		4.2" Colour LCD & Electrostatic Touch Sereen	Auto Outlei Opare Diade 0120013331	Mac System Requirement	Mac OS X 10.6.8 or later
SuperSpeed USB*, 10EASE:T/100				Utility Software	
Primer Language ESC/P nater	-	SuperSpeed LISP'4 10PASE T/100PASE TV/IEEE002 11b/a/p/20		Bundled in CD	Windows Install Navi - Pr
Memory IGE Linkfler - Epson (Augustantian Section 2002) Departual System PC Supported US Windows 7, 8, 81, 10, 11 or later Windows Sever 2022, 2019, 2016, 2012 R2, 2012, 2008 R2, 2008 CC System Requirement House System Requirement Utility Software Barciled in CO Windows - Printer Driver - EpsonNet Band Bds* Mac OS SU10.9.5 or later Mac OS SU10.5 or later Mac OS SU10.5 or later Mac OS SU10.5 or later Mac OS SU10.5 or l					- EpsonNet Config SE -E
Operating System Windows 7, 8, 8, 1, 10, 11 or later Software Updater VC Supported OS Windows 7, 8, 8, 1, 10, 11 or later Windows 7, 8, 8, 1, 10, 11 or later Windows 7, 8, 8, 1, 10, 11 or later Windows Sever 2022, 2019, 2016, 2012PZ, 2012, 2008PZ, 2008 Contract Updater Software Updater Software Updater Web Supported OS Windows 6, 78, 18, 10, 11 or later Windows 6, 78, 18, 10, 11 or later Windows 1, 78, 18, 11, 10, 11 or later Web Supported OS Windows 7, 8, 18, 10, 11 or later Windows 6, 78, 18, 60, 10, 2012PZ, 2012, 2008PZ, 2008 Contract Updater Web Delivery Windows - Printer Driver - EpsonNet Thirt - Epson Net/Sature Updater - Epson Mexica Unitation - Device Status Person Sinapore Pie LD, A Rights Heavest, Person Maria Laurcher - Epson Print Layout - Epson Net/Sature Updater - Firmware Updater - Acobe ICC Profile - LPSON Struke Updater - Firmware Updater - Firmware Updater - Firmware Updater - Acobe ICC Profile - LPSON Struke Updater - Struke Backage - Web Installer - Software Updater - Ministaller Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100 - 240V, 50/60Hz Ac 100	0 0				Luncher - Epson Control
CC Supported OS Windows 7, 8, 8, 1, 10, 11 or later Web Delivery Web Delivery Web Delivery Web Delivery Web Delivery Differe Space more than 4GB, 40, 400; CC PMIC - 100, 30, 5GHz or more, Memory: Memory more than 8GB, 40, 400; CC PMIC - 100, 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 30, 5GHz or more, Memory: Memory more than 8GB, 400; CC PUI C Core 2 Duo 40, 400; CC PUI C Core 2					
C System Requirement Windows Server 2022, 2019, 2016, 2017, 2012, 2019, 2016, 2012, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2012, 2019, 2016, 2019, 2019, 2016, 2019, 2019, 2016, 2019,		Windows 7, 8, 8, 1, 10, 11 or later		Web Delivery	Windows Install Navi, We
2C System Requirement Web System Requirement Web CPU: Core 2 Duo 3.05GHz or more, Memory: Memory more than 4GB, <u>HDD: Free Space more than 64GB*</u> Wac OS X10.9.5 or later Wac System Requirement UDI: Free Space more than 128GB* HDD: Free Space More more more more more more more more m					Driver, Epson Media Inst
HDD: Free Space more than 14GB* HDD: Free Space more than 14GB* Conf. 2 Subscription C	PC System Requirement				Epson Edge Dashboard,
Mace System Requirement Mace OS X10.3.6 or later Config - Egos Name Wace System Requirement CDU Core 2 to 00.3056/t zor more, Memory more than 98.8, HDD: Free Space more than 128G8* 0004 Exon Srgpcore Pie Ld. All Rights Reserved. Repoduction into Exon is whelly without = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos net (to 000 + typos) = typos) = typos net (to 000 + typos) = typos) = typos net (to	,				tool, Adobe ICC Profiles,
Value System Requirement CPU: Core 2 Duo 3.05GHz or more, Memory: Memory more than 8GB, HDD; Free Space more than 128GB* Installer, Firmware U Utility Software Bundled in CD Windows - Phitter Driver - Epson Net Setup - Epson Net Setup - Epson Net Golg Dashband - Epson Merial Launcher - Epson Print Layout - Epson Net Golg Dashband - Epson Merial Setup - Epson Net Config Se - Epson Manual Launcher - Epson Print Layout - Epson Net Config Se - Epson Manual Launcher - Epson Print Layout - Epson Net Config Se - Epson Manual Launcher - Software Updater - Minware Updater - More or Config Se - Epson Manual Launcher - Software Updater - Software	Mac Supported OS				Config - Epson Software
HDD: Free Space more than 1280B ³ HDD: Free Space more than 1280B ³ HDD: Free Space more than 1280B ³ Bundled in CD Windows - Printer Dirver - Epson Net Call I space to Ego abboard - Epson Media Installer - Epson Media Installer - Epson CalorBase3 - Epson Device Admin - Device Status System (DSS) - EPSON SureLab Order Controller Eco24 Epson Alera at the part or wheat at the orange yourset at the orange					Installer, Firmware Updat
Utility Software Bundled in CD Windows - Printer Driver - EpsonNet Print - EpsonNet Setup - EpsonNet Contig SE - Epson Manual Launcher - Epson Print Layout - Epson Netice Admin - Device Status Epson Media Installer - Epson Print Layout - Epson Netroller Controller				Electrical Specifications	
Bundled in CD Windows - Printer Diver - EpsonNet Print - EpsonNet Point Layout - Epson Edge Dashboard - Epson Manual Launcher - Epson Point Layout - Epson Device Admin - Device Status System (DSS) - EPSON SureLab Order Controller Mac - Phinter Diver - Firmware Update - EpsonNet Config SE - Epson Manual Launcher - Epson Phint Layout - EpsonNet Config SE - Epson Manual Launcher - Epson Phinte Joure - Formware Update - EpsonNet Config SE - Epson Manual Launcher - Epson Phinte Joure - Firmware Update - EpsonNet Config SE - Epson Manual Launcher - Epson Phinte Joure - Firmware Update - EpsonNet Config SE - Epson Manual Launcher - Epson Phinte Joure - Firmware Updater - Firmware Updater - EpsonNet Config SE - Epson Manual Launcher - Spon Phinte Joure - Firmware Updater - EpsonNet Config SE - Epson Manual Launcher - Epson Phint Layout - EpsonNet Config SE - Epson Manual Launcher - Epson Phint Layout - EpsonNet Config SE - Epson Manual Launcher - Epson Phinte Joure - Firmware Updater -	Jtility Software	· · · · ·		Voltage	AC 100 - 240V, 50/60Hz
Sb: - Epson Marula Laurcher - Epson Marula Laurcher - Epson Narula Dorder Controller permission tom Epson, status prohibited. Web Delivery Windows - Installer Package (Installer - Epson Print Layout permission tom Epson, status prohibited. Web Delivery Windows - Installer Package (Installer - Epson Print Layout permission tom Epson, status prohibited. Web Delivery Windows - Installer Package (Installer - Epson Print Layout permission tom Epson, status prohibited. Web Delivery Windows - Installer Package (Installer - Epson Print Layout permission tom Epson, status probated. Uninstaller Package (Installer - Software Updater - Firmware Updater - Consumption Deresting 3,400 km endeated of the trademak of Bole Epson Bandware Updater - Firmware Updater - Software Units and Bandware O dorde to charge theorem contrine. Page Son Bandware Development Son Bandware Devel		Windows - Printer Driver - EpsonNet Print - EpsonNet Setup - EpsonNet Config			AC 100V 3.4AAC 100-2
Epson Media Installer - Epson OlorBase3 - Epson Device Admin - Device Status System (DSS) - EPSON Survace Ontroller Mac - Printer Driver - Firmware Update - EpsonNet Config SE - Epson Manual Launcher - Epson Print Layout PSON is a rightmed trademark of Selio Epson Select Pasc		SE - Epson Manual Launcher - Epson Print Layout - Epson Edge Dashboard -		Power Consumption	Operating: Approx. 85W
System (DSS) = EPSON SureLab Order Controller Mac - Printue Driver - Firmware Update - Epson Net Config SE - Epson Manual Launcher - Epson Print Layout Corporation. Corporation. Standby: Approx. 3.4W		Epson Media Installer - Epson ColorBase3 - Epson Device Admin - Device Status			
Web Delivery Launcher - Epson Print Layout Device the product design and be producted and the product design and be producted and the product design and be produced design and be product design and be product design and be product design and be pr		System (DSS) - EPSON SureLab Order Controller			
Web Delivery Ladin Cleff - C. Spoor Print LeyOut are the tradomake or registered tradomakes or there are simulations. The actual product design and contents may vay. Specifications are subject to charge without cotter and may vay between countries. Prese check with local Epson chines to there countries. Apple inc. Apperox. 53 kg		Mac - Printer Driver - Firmware Update - EpsonNet Config SE - Epson Manual			Standby: Approx. 0.3W
Web Delivery Windows - Installer Package (Install Nav) - Web Installer - Software Updater - Firmware Updater - Adobe ICC Profile - LFP Accounting Tool Mac - Installer Package - Web Installer - Software Updater - Firmware Updater - Firmware Updater - Uninstaller respective owners. respective owners. Importantions Electrical Specifications foltage Act 100 - 240V, 50/60Hz AC 100 - 240V, 50/60Hz Storage: 1,401 x 60 Act 100 - 240V, 50/60Hz Act 100 - 240V, 50/60Hz Act 100 - 240V, 50/60Hz Bit Package - Web Installer - Software Updater - Firmware Updater - Power Consumption Projection mage without notice and may apy. Specifications are subject to change without notice and may apy. Specifications are subject to change without notice and may app. Weight Storage: 1,401 x 60 Power Consumption Operating: 10°C to 35°C / Storage: -20°C to 40°C Approx. 121.7 kg Dimensions & Weight Media is tandemark of Google Inc. Dealer's Stamp Dimension (W x D x H) 863 x 1,134 x 405 mm Dealer's Stamp Weight Approx. 53 kg Intermation correct at time of printing. Printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Intermation correct at time of printing. Printid Splember 2024 Intermation correct at time of printing. Printid Splember 2024 It unitity outware, please refer to system requirements for each utility software. Printidig on testincins on the same re					
Mac - Installer Package - Web Installer - Software Updater - Firmware Updater - Uninstaller Projected mages shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Page betwee with local design and counters. Page betwee with local design and counters. Page betwee mounts. Apple IPad and Phone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., and there countries. App Store is a service mark of Apple Inc., and there countries. App Store is a service mark of Apple Inc., and the Apple Inc., and the Apple Inc., and there countries and the Apple Inc., and the Apple Inc., and the Apple Inc., and there are any and the Apple Inc., and there are any and the Apple Inc., and the Apple Inc., and there are any and the Apple Inc., and there are any and the Apple Inc.,	Veb Delivery				Operating: 10°C to 35°C
mid: - installer Package - Web installer - Software Opdater - Printware Opd			Epson disclaims any and all rights in those marks.		Operating: 20% to 80%
Uninstaller Specifications are subject to change without notice and mey vary between contribution series subject to change without notice and mey vary between contributions. Please check with local Epson offices for more information. Dimension (W x D x H) Storage: 1,401 x 66 Printing: 1,401 x 2.2 Approx. 42W, Ready: Approx. 17W, See the value of the countries. App Store is a service mark of Apple inc. Apple, iPad and iPhone are trademarks of Apple inc. Apple, iPad and iPhone are trademarks of Apple inc. Power Consumption Steep: Approx. 24W, Standby: Approx. 0.2W Android is a trademark of Googe Inc. Meight Environmental Conditions Operating: 10°C to 35°C / Storage: -20°C to 40°C Delarity Stamp Delarity Stamp Dimension (W x D x H) 863 x 1,134 x 405 mm Delarity Stamp Delarity Stamp Delarity Stamp Dimension the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Information correct at time of printing. Printed September 2024 Portable with the USB 3.0 specification. Cos of So or applications. Compatible with the USB 3.0 specification. So specifications. Compatible with the USB 3.0 specification. For utility software, please relet to system requirements for each utility software. Information correct at time of printing. Printable length		Mac - Installer Package - Web Installer - Software Updater - Firmware Updater -			
AC 100 - 240V, 50/60Hz Epion offices for more information. Act 100 - 240V, 50/60Hz AC 100 - 240V, 50/60Hz Act 100 - 240V, 20/03.44AC 100-240V 3.4-1.6A Operating: Approx. 42W, Ready: Approx. 17W, Super: Approx. 2.4W, Standby: Approx. 0.2W Apple, iPad and iPhone are trademarks of Apple Inc., Forwironmental Conditions Operating: 10°C to 35°C / Storage: -20°C to 40°C Android is a trademark of Google Inc. Dimension & Weight Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Dimension (W x D x H) 863 x 1,134 x 405 mm Dealer's Stamp Neight Approx. 53 kg Information correct at time of printing. Portable legending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the USB 3.0 specification. Information correct at time of printing. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. September 2024 Compatible with the USB 3.0 specification. Comatifies of the paper is to system requirem		Uninstaller	Specifications are subject to change without notice and	Dimension (W x D x H)	Storage: 1,401 x 667 x 1
Voltage AC 100 - 240V, 50/60Hz Apple, Pad and Phone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Meight Apple, Pad and Phone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Power Consumption Operating: 10°C to 35°C / Storage: -20°C to 40°C Android is a trademark of Google Inc. Dealer's Stamp Dimension & Weight B63 x 1,134 x 405 mm Dealer's Stamp Dealer's Stamp 1 Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Information correct at time of printing. Printed September 2024 Information correct at time of printing. Printed September 2024 1 Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Information correct at time of printing. Printed September 2024 Printed September 2024 2 Printable Insertifications of OSs or applications. Compatible with the USB 3.0 specification. Information correct at time of printing. Printed September 2024 4 For utility software, please refer to system requirements for each utility software. Information correct at time of printing. Printed September 2024	Electrical Specifications				Printing: 1,401 x 2,211 x
Attend Current AC 100V 3.44AC 100-240V 3.4-1.6A registered in the US. and other countries. App Store is a service mark of Apple Inc. Power Consumption Operating: Approx. 42W, Ready: Approx. 0.2W registered in the US. and other countries. App Store is a service mark of Apple Inc. " Might differ depends on applications/media. Environmental Conditions Operating: 10°C to 35°C / Storage: -20°C to 40°C Depending: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Dimension & Weight 863 x 1,134 x 405 mm Approx. 53 kg Dealer's stamp Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Depending on testrictions of OSs or applications. Information correct at time of printing. Pointable learner range. Operating: 1 is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the USB 3.0 specification. Printable learner size are for to system requirements for each utility software.				Weight	Approx. 121.7 kg
Sleep: Approx. 2.4W, Standby: Approx. 0.2W Android is a trademark of Google Inc. Environmental Conditions Operating: 10°C to 35°C / Storage: -20°C to 40°C Dealer's Stamp Humidity Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Dimensions & Weight 863 x 1,134 x 405 mm Dealer's Stamp Neight 863 x 1,134 x 405 mm Printable outer diameter range. Pending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Information correct at time of printing. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. Printable nergth is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. To rullity software, please refer to system requirements for each utility software. Printable compatible outer diameter size. If roll paper is used, please confirm that it is within			registered in the U.S. and other countries. App Store is		
Environmental Conditions Operating: 10°C to 35°C / Storage: -20°C to 40°C Deparating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Temperature Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Dimensions & Weight 863 x 1,134 x 405 mm Dealer's Stamp Dimension (W x D x H) 863 x 1,134 x 405 mm Dealer's Stamp Veight Approx. 53 kg Information correct at time of printing. Perpending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outsid so specification. Information correct at time of printing. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. Printable length is limited depending on restrictions of OSs or applications. For utility software, please refer to system requirements for each utility software. To weight software, please refer to system requirements for each utility software. Dealer's Stamp	Power Consumption			*1 Might differ depends on applications.	/media.
Temperature Operating: 10°C to 35°C / Storage: -20°C to 40°C Dealer's Stamp Humidity Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dealer's Stamp Dimension & Weight 863 x 1,134 x 405 mm Approx. 53 kg Dealer's Stamp I Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Dealer's Stamp Dealer's Stamp I Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Dealer's Stamp Dealer's Stamp I based on printing on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the diameter range. Information correct at time of printing. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification Dealer's Stamp Printable length is limited specification For utility software, please refer to system requirements for each utility software. Dealer's Stamp		Sleep: Approx. 2.4W, Standby: Approx. 0.2W	Android is a trademark of Google Inc.		
Humidity Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation) Dimensions & Weight B63 x 1,134 x 405 mm Dimension (W x D x H) 863 x 1,134 x 405 mm Veight Approx. 53 kg Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Information correct at time of printing. Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Information correct at time of printing. Printed Bepending on restrictions of OSs or applications. Printed September 2024 Printed September 2024 Compatible with the USB 3.0 specification. For utility software, please refer to system requirements for each utility software. For utility software, please refer to system requirements for each utility software. For utility software, please refer to system requirements for each utility software.					
Dimensions & Weight 863 x 1,134 x 405 mm Dimension (W x D x H) 863 x 1,134 x 405 mm Neight Approx. 53 kg Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Information correct at time of printing. Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Information correct at time of printing. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. Printed September 2024 For utility software, please refer to system requirements for each utility software. For utility software. For utility software.	•		Dealer's Stamp		
Dimension (W x D x H) 863 x 1,134 x 405 mm Approx. 53 kg Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. For utility software, please refer to system requirements for each utility software.		Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation)			
Weight Approx. 53 kg 1 Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. 1 Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. 2 Printable length is limited depending on restrictions of OSs or applications. 3 Compatible with the USB 3.0 specification. 4 For utility software, please refer to system requirements for each utility software.					
 Based on printing on A2 size Premium Glossy Photo Paper from starting pass to cut. Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Printable length is limited depending on restrictions of OSs or applications. Compatible with the USB 3.0 specification. For utility software, please refer to system requirements for each utility software. 		· · · · · · · · · · · · · · · · · · ·			
 Depending on the thickness of the paper, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within the outside diameter range. Printed September 2024 	Weight	Approx. 53 kg			
the outside diameter range. ² Printable length is limited depending on restrictions of OSs or applications. ³ Compatible with the USB 3.0 specification. ⁴ For utility software, please refer to system requirements for each utility software.					
 ² Printable length is limited depending on restrictions of OSs or applications. ³ Compatible with the USB 3.0 specification. ⁴ For utility software, please refer to system requirements for each utility software. 		per, it is larger than the available outer diameter size. If roll paper is used, please confirm that it is within	Printed September 2024		
 ³ Compatible with the USB 3.0 specification. ⁴ For utility software, please refer to system requirements for each utility software. 	² Printable length is limited depending of	on restrictions of OSs or applications.			
	³ Compatible with the USB 3.0 specific	ation.			
	For utility software, please refer to sys	stem requirements for each utility software.			
Find out more at www.epson.com.sg/gobig-photo 🖬 EpsonSingapore 🕑 EpsonSingapore 🕑 EpsonSingapore 🕑 EpsonSingapore 🕑 EpsonSingapore 🖉 EpsonSingapore EpsonSin					

SPECIFICATIONS

IODEL NUMBER	SC-P7530	SC-P9530	
KU Number	C11CH12402	C11CH134	
rinting Technology			
rinting Method	PrecisionCore Inkjet Technology, Variable	-Sized Drop	
rint Head	PrecisionCore MicroTFP Printhead		
ozzle Configuration	9,600 Nozzles (800 nozzles x 12 channe	ls x 1 head)	
laximum Resolution	2,400 x 1,200 dpi		
linimum Ink Droplet Volume	3.5pl		
rinting Specifications			
rint Speed	97 sec (Level 1)	219 sec (Le	
	122 sec (Default) Premium Glossy	285 sec (D	
	Photo Paper 170gsm A1 Size/ISO Bike	Photo Pape	
nk System			
k Type	Pigment Ink		
k Brand Name	UltraChrome PRO 12 Ink		
olour	Photo Black, Cyan, Vivid Magenta, Yellov	v. Matte Bla	
orodi	Vivid Light Magenta, Orange, Green, Viol		
k Capacity	350ml, 700ml	01, 010), 2.9	
k Case	Ink Cartridge		
aper Handling			
aper Path	Roll Sheet (Manual)		
aper Feed Method	Friction Feed		
laximum Roll Diameter	2" Roll core-media: Max. 103 mm, 3" Ro	Il coro modi	
laximum Roll Weight	6kg 254 – 620 mm	10kg	
aper Width (Roll)		$\frac{254 - 1,11}{210}$	
aper Width (Cut Sheet)	210 - 620 mm	210 – 1,11	
aper Thickness (Roll)	0.08 – 0.5 mm		
aper Thickness (Manual)	Cut Sheet: 0.08 – 1.5 mm		
onnectivity			
terface	Super-Speed USB ^{*1} , 100BASE-TX /	USB Interfa	
	1000BASE-T	1000BASE	
rinter Language	ESC/P raster		
lemory	2GB		
perating System			
C System Requirement	Windows 10, 8.1, 8, 7, Windows Vista, V		
	Windows Server 2019/2016/2012 R2/20		
lac System Requirement	Mac OS X 10.6.8 or later, Mac OS 11 or	later	
tility Software			
undled in CD	Windows Install Navi - Printer driver - Eps		
	- EpsonNet Config SE - Epson Software I		
	Luncher - Epson Control DashboardMac	Setup Navi	
	Software Updater		
/eb Delivery	Windows Install Navi, Web Installer, Firm		
	Driver, Epson Media Installer, EpsonNet S		
	Epson Edge Dashboard, Epson Edge Pri		
	tool, Adobe ICC Profiles, Mac Web Instal		
	Config - Epson Software Updater - Unins	staller - Epsc	
	Installer, Firmware Updater, Linux, Printer	driver	
lectrical Specifications			
oltage	AC 100 – 240V, 50/60Hz		
ated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A		
ower Consumption	Operating: Approx. 85W	Operating:	
	Ready: Approx. 32W	Ready: App	
	Sleep: Approx. 3.4W	Sleep: App	
	Standby: Approx. 0.3W	Standby: A	
nvironmental Conditions			
emperature	Operating: 10°C to 35°C / Storage: -20°	C to 40°C	
umidity	Operating: 20% to 80% (no condensation	n), Storage:	
imensions & Weight			
imension (W x D x H)	Storage: 1,401 x 667 x 1,218 mm	Storage: 1	
	Printing: 1,401 x 2,211 x 1,218 mm	Printing: 1	
/eight	Approx. 121.7 kg	Approx. 15	
-	.		



438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 Epson Singapore Pte Ltd Epson Customer Care Center

100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

Epson Singapore Pte Ltd Epson Customer Care Center

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

402

plet Technology

_evel 1) Default) Premium Glossy per 170gsm B0 Size/ISO Bike

ack, Light Cyan, ght Grey

dia: Max. 150 mm

18 mm 18 mm

face (Hi-Speed USB/USB), E-T/100BASE-TX

P (32bit/64bit) 2003 R2/2003 SP2 or later

tup - EpsonNet Print EPSON manuals - Manual i EpsonNet Config SE Epson

ter, PS Driver, HDI Driver, XPS ager, Epson Device Admin, Print Layout, LFP Accounting Navi - Printer driver - EpsonNet son Manuals, Epson Media

Approx. 110W oprox. 32W prox. 3.4W Approx. 0.3W

: 5% to 85% (no condensation)

,909 x 667 x 1,218 mm 1,909 x 2,211 x 1,218 mm Approx. 153.8 kg

Dimensions and Weight

SC-P7530

Weight: Approx. 121.7 kg



SC-P9530 Weight: Approx. 153.8 kg



WHAT'S IN THE BOX

- PrinterPrinter Stand
- Initial ink cartridge (110ml)
- AC power cable
- Setup guideSoftware CD-ROM
- Maintenance box

OPTIONS

Spectro Proofer (24")	C12C890531
 Compatible with P7500 	
Spectro Proofer (44")	C12C890521
 Compatible with P5500 	
ILS30EP	C12C932021
Auto Take Up Reel	C12C935931
Hard Disk Unit	C12C934551
Roll Media Adapter	C12C935931
Adobe [®] PostScript [®] 3 [™]	C12C934571
Expansion Unit	

©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing. Printed September 2024



SPECIFICATIONS

MODEL NUMBER	SC-P6530E	SC-P6530D	Dimensions and Weight
SKU Number	C11CJ48402	C11CJ49402	SC-P6530E
Printing Technology			Weight: Approx. 115.2kg
Printing Method	PrecisionCore Inkjet Technology, Variable	e-Sized Droplet Technology	
Print Head	PrecisionCore MicroTFP Printhead		
Nozzle Configuration	9,600 Nozzles		Account of
Black	Pk:1,600, Mk:1,600		975mm
Colour	<u>C:1,600, M:1,600, Y:1,600, Grey:1,600</u>		
Maximum Resolution	2,400 x 1,200 dpi		
Minimum Ink Droplet Volume	3.5pl		499mm
Printing Specifications			1,365mm
Print Speed	A1 Size Premium Glossy Photo Paper 1		1,0051111
	EPSON Standard (sRGB) / Quality: 111	Sec	
Margin Roll Paper	Right: Min. 3mm ^{*1} / Left : Min. 0mm ^{*1}		SC-P6530D
Cut Sheet	Top: Min. 3mm*1 / Bottom: Min. 1mm*1		Weight: Approx. 115.6kg
Minimum Line Width	0.08 mm ^{*2} (0.02 mm ^{*3})		
nk System	Diamont Inly		
nk Type	Pigment Ink		
Ink Brand Name	UltraChrome PRO 6 Ink	the Diagle Oraci	975mm
Colour	Photo Black, Cyan, Magenta, Yellow, Ma	atte Black, Grey	9731111
Ink Capacity	350, 700 ml		
nk Case	Ink Cartridge		
Paper Handling			499mm
Paper Path	Roll (Single Roll),	Roll (Double Roll),	1,365mm
	Cut Sheet (Manual Feed),	Cut Sheet (Manual Feed),	
	Poster Board (Manual Feed)	Poster Board (Manual Feed)	
Paper Feed Method	Friction Feed		
Maximum Roll Diameter	Max. 170 mm ^{*4}		WHAT'S IN THE BOX
Maximum Roll Weight	6.8kg 254 – 610 mm		Printer
Paper Width (Roll)			 Initial ink cartridge (110ml)
Paper Width (Cut Sheet)	203 – 610 mm		AC power cable
Paper Thickness (Roll)	0.07 – 0.8 mm		Setup guideSoftware CD-ROM
Paper Thickness (Manual)	Cut Sheet: 0.07 – 0.8 mm / Poster Boar	d: U.8 – 1.5 mm	Maintenance box
Maximum Printable Length	<u>91 m^{*5}</u>		
Borderless Sizes		13"), 356mm (14"), 406mm (16"), 432mm	OPTIONS
	(17"), 500mm (19"), 508mm (20"), 515m		Roll Feed Spindle (24") C12C937711
Roll Paper Remaining	The remaining amount is managed by the	le barcode printed on roll paper	SSD Unit C12C936671
Connectivity	SuperSpeed LICE 100DACE TV/1000D		
nterface	SuperSpeed USB, 100BASE-TX/1000B	ASE-1/1EEE802.11D/g/11/ac,	
	USB Memory Stick		*It is recommanded to do toot before
Printer Language	ESC/P raster	ESC/P raster, HP-GL/2*, HP RTL*,	*It is recommended to do test before purchasing printer if HP-GL/2 or HP RTL
ICD Dive at Dviet		Adobe PostScript 3, Adobe PDF 1.7	direct print is used, because the support
USB Direct Print	Yes		is dependent on application or data.
	4GB SSD 960GB		
HDD (Optional)	22D 900GB		
Operating System			
PC System Requirement	Windows 10, 8.1, 8, 7, Windows Vista, V	· /	
	Windows Server 2019/2016/2012 R2/2		
Mac System Requirement	Mac OS X 10.6.8 or later, Mac OS 11 or	later	©2024 Epson Singapore Pte Ltd. All Rights Reserve
Jtility Software	Windows Drinter driver EngeneNat Ori		Reproduction in part or in whole, without the written
Bundled in CD	Windows - Printer driver - EpsonNet Set		permission from Epson, is strictly prohibited.
Neb Deliver	SE - EPSON manuals - Manual Launche		EPSON is a registered trademark of Seiko Epson Corporation.
Web Delivery	Epson Media Installer - EpsonNet Setup	All other product names and other company names	
	Edge Dashboard - Epson Print Layout -	used herein are for identification purposes only and	
	Mac - Printer driver - EpsonNet Config S		are the trademarks or registered trademarks of their respective owners.
	Installer - Epson Edge Dashboard - Eps	on Finit LayoutiOS/Android -	Epson disclaims any and all rights in those marks.
Electrical Specifications	Epson Smart Panel		Projected images shown herein are simulations.
Electrical Specifications			The actual product design and contents may vary. Specifications are subject to change without notice a
Voltage Datad Current	AC 100 – 240V, 50/60Hz		may vary between countries. Please check with local
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A	· 20\\/	Epson offices for more information.
Power Consumption	Operating: Approx. 75W, Ready: Approx		Apple, iPad and iPhone are trademarks of Apple Inc. registered in the U.S. and other countries. App Store
	Sleep: Approx. 2W, Standby: Approx. 0.	300	a service mark of Apple Inc.
Environmental Conditions	Operating 10°C to 05°C / Otaman 000	2C to 10°C	Android is a trademark of Google Inc.
Temperature	Operating: 10°C to 35°C / Storage: -20°		
Humidity	Operating: 20% to 80% (no condensation)	лт <u>у</u>	Dealer's Stamp
Dimonoione 9 Weight	Storage: 5% to 85% (no condensation)		
Dimensions & Weight	1 265 x 400 x 075 mm		
	1,365 x 499 x 975 mm	Approv. 115 Clim	
. ,	Approx. 115.2kg	Approx. 115.6kg	
. ,			Information correct at time of printing.
Weight	nedia.		
Weight Might differ depends on applications/r SO/IEC 24790, Single weight mattep	iedia. aper, CAD/line drawing, speed, high speed=Off, fines	t detail=On.	Printed September 2024
Weight ¹ Might differ depends on applications/r ² ISO/IEC 24790, Single weight matte p ³ Addressable.	aper, CAD/line drawing, speed, high speed=Off, fines		Printed September 2024
Weight 1 Might differ depends on applications/r 2 ISO/IEC 24790, Single weight matte p 3 Addressable. 4 Depending on the thickness of the pay within the outside diameter range.	aper, CAD/line drawing, speed, high speed=Off, fines er. It is larger than the available outer diameter size.		Printed September 2024
 Addressable. Depending on the thickness of the pay within the outside diameter range. 	aper, CAD/line drawing, speed, high speed=Off, fines		Printed September 2024

SPECIFICATIONS

MODEL NUMBER SKU Number	_ <u>SC-P8530D</u> C11CJ50402	SC-P8530DM C11CJ51402
Printing Technology Printing Method	PrecisionCore Inkjet Technology, Variable-Siz	
Print Head Nozzle Configuration	PrecisionCore Micro 9,600 Nozzles	
Black	Pk:1,600, Mk:1,600	
Colour Maximum Resolution	C:1,600, M:1,600, Y: 2,400 x 1,200 dpi	:1,600, Grey:1,600
Minimum Ink Droplet Volume	3.5pl	
Printing Specifications Print Speed	B0 cizo Promium Clo	ossy Photo Paper 170gsm:
Finit Speeu	152 sec (Speed), 28 Plain Paper: 35 sec (Poster – B0 size Eps	1 sec (Quality), 614 sec (Max (Draft), 46 sec (Speed), 258 se on Premium Glossy Photo Pa
Margin Roll Paper	Standard(sRGB)/Qua Right: Min. 3mm ^{*1} / L	
Cut Sheet	Top: Min. 3mm ^{*1} / Bo	
Scanning Specifications Max. Scan Speed	_	10 ips
Max. Optical Resolution		600 dpi
Scanning Specifications Max. Scan Speed	10 ips	
Max. Optical Resolution	600 dpi	
Copying Specifications		1.25 7550/
Scaling Max. Copy	-	<u></u> <u>25 – 755%</u> 99 copies
Ink System	Diamant late	
Ink Type Ink Brand Name	Pigment Ink UltraChrome PRO 6	Ink
Colour	Photo Black, Cyan, N	Magenta, Yellow, Matte Black,
Ink Capacity Ink Case	350, 700 ml Ink Cartridge	
Paper Handling Paper Path	Roll (Double Roll) C	ut Sheet (Manual Feed), Poster
Paper Feed Method	Friction Feed	n oncor (manual i eeu), FOSIE
Maximum Roll Diameter	Max. 170 mm ^{*2}	
Maximum Roll Weight Paper Width (Roll)	12.5kg 254 – 1,118 mm	
Paper Width (Cut Sheet)	203 – 1,118 mm	
Paper Thickness (Roll) Paper Thickness (Manual)	0.07 – 0.8 mm Cut Sheet: 0.07 – 0.8	8 mm / Poster Board: 0.8 – 1.
Maximum Printable Length	<u>9</u> 1 m [™]	
Borderless Sizes	(17"), 500mm (19"), 50 700mm (27.5"), 728m	n (11.8"), 330mm (13"), 356mm 08mm (20"), 515mm (20.3"), 59 nm (28.6"), 841mm (33"), 914m
Roll Paper Remaining	<u>1188mm (44")</u> The remaining amou	nt is managed by the barcode
Connectivity		32 X
Interface Printer Language	SuperSpeed USB ^{*1} ,	100BASE-TX /1000BASE-T/IE /2*, HP RTL*, Adobe PostScr
Printer Language USB Direct Print	Yes	
Memory	4GB	
HDD (Optional) Operating System	SSD 960GB	
PC System Requirement		7, Windows Vista, Windows X
Mac System Requirement	Windows Server 201	9/2016/2012 R2/2012/2008/3 later, Mac OS 11 or later
Utility Software	INIG CO A 10.0.0 0	iator, mao OO I I UI Ialei
Bundled in CD		iver - EpsonNet Setup - Epson
	Driver - PS Folder	s - Manual Launcher - LFP Pri
Web Delivery	Windows - Epson Me	edia Installer - EpsonNet Setu
		e Dashboard - Epson Print Lay ption) - Epson Print Admin (Op
	Mac - Printer driver -	EpsonNet Config SE - EPSO
	Installer - Epson Edg Epson Smart Panel	e Dashboard - Epson Print La
Electrical Specifications		
Voltage Rated Current	AC 100 - 240V, 50/6	
Rated Current Power Consumption	AC 100V 3.4AAC 10 Operating: Approx. 7	
	Ready: Approx. 32W	/
	Sleep: Approx. 2.0W Standby: Approx. 0.3	
Environmental Conditions		
Temperature Humidity		<u>35°C / Storage: -20°C to 40°C</u> 0% (no condensation), Storage
Dimensions & Weight	_ <u>Uperalling</u> , 20% (0 8)	070 (110 00110E115a11011), 3101291
Dimension (W x D x H)	<u>1,848 x 499 x 975 m</u>	าท
Weight	Approx. 155kg	
*1 Might differ depends on applications *2 Depending on the thickness of the particular sectors.		able outer diameter size. If roll paper is
within the outside diameter range.	on restrictions of operating sy	
	VIENTICATION OF A DEPARTMENT SALES	
	on recencione of operating of	

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours. Epson Singapore Pte Ltd Epson Customer Care Center

 Epson Singapore Pte Ltd
 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500

 Epson Customer Care Center
 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

SC-P8530DL C11CJ75402	Dimensions and Weight
d Droplet Technology	SC-P8530D / P8530DM Weight: Approx. 155kg
	975mm
n: /lax Quality) 58 sec (High Quality) o Paper 170gsm 1200dpi x 1200dpi:	1,848mm
	SC-P8530DL Weight: Approx. 165kg
	975mm
	1,848mm
ack, Grey 1,600 ml	
Ink Supply Unit (Bulk Ink Solution) oster Board (Manual Feed)	WHAT'S IN THE BOX Printer Initial ink cartridge (240ml) AC power cable Setup guide Software CD-ROM
	Maintenance box
5 – 1.5 mm 6mm (14"), 406mm (16"), 432mm "), 594mm (23"), 610mm (24"), 14mm (36"), 1030mm (40.5"),	OPTIONS Roll Feed Spindle (44") C12C936171 SSD Unit C12C936671
code printed on roll paper	
-T/IEEE802.11b/g/n/ac stScript 3, Adobe PDF 1.7	*It is recommended to do test before purchasing printer if HP-GL/2 or HP RTL direct print is used, because the support is dependent on application or data.
ows XP (32bit/64bit) 008/2003 R2/2003 SP2 or later	
EpsonNet Print - EpsonNet Config P Print Plug-in for Office - PS	©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is a registered trademark of Seiko Epson Corporation.
SetupManager - Epson Device t Layout - Epson Print Automate - n (Option) - Order Controller (Option) PSON manuals - Epson Media nt Layout - PS DriveriOS/Android -	All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary.
	Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.
Operating: Approx. 75W Ready: Approx. 32W Sleep: Approx. 2.0W Standby: Approx. 0.3W	Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android is a trademark of Google Inc.
40°C orage: 5% to 85% (no condensation)	Dealer's Stamp
Approx. 165kg	
aper is used, please confirm that it is	Information correct at time of printing. Printed September 2024
Singapore 🗿 EpsonSingapore 🕨 EpsonSouth	eastAsia in Epson Singapore 🕑 EpsonSingapore

SPECIFICATIONS

MODEL NUMBER	SC-P20070	Dimensions and Weight	MODEL NUMBER
SKU Number	C11CE20402	SC-P20070	SKU Number
Printing Technology		Weight: Approx. 171 kg	Printing Technology
Printing Method	PrecisionCore Inkjet Technology, Variable-Sized Droplet Technology		Printing Method
Print Head	PrecisionCore MicroTFP Printhead		Print Head
Nozzle Configuration	4,000 Nozzles	PDI	Nozzle Configuration
Black	PK, MK, DGY, GY, LGY: 800 Nozzles		Black
Colour	C, VM, Y, LC, VLM: 800 Nozzles	1,145mm	Colour
Maximum Resolution	2,400 x 1,200 dpi		Maximum Resolution
Minimum Ink Droplet Volume	3.5pl		Minimum Ink Droplet Vo
Printing Specifications		· · · · ·	Printing Specification
Print Speed	Draft Mode (600 x 600 dpi): 1.9 minutes	2,415mm 760mm	Print Speed
	Normal Mode (1,200 x 1,200 dpi): 3.0 minutes	2, 11011111	Line Accuracy
	Fine Mode (2,400 x 1,200 dpi): 5.6 minutes		Ink System
Ink System			Ink Type
Ink Type	Pigment Ink		Ink Brand Name
Ink Brand Name	UltraChrome PRO Ink	WHAT'S IN THE BOX	Colour
Colour	Photo Black, Cyan, Vivid Magenta, Yellow, Matte Black, Dark Grey, Grey,	Printer	001001
Colour		 Initial ink cartridge (110ml) 	Inly Connaity
Ink Capacity	Light Grey, Light Cyan, Vivid Light Magenta 700ml	AC power cable	Ink Capacity
		Setup guideSoftware CD-ROM	Ink Case
Ink Case	Ink Cartridge	Maintenance box	Paper Handling
Paper Handling			Paper Path
Paper Path	Roll (Single Roll), Cut Sheet (Manual Feed)	OPTIONS	Paper Feed Method
Paper Feed Method	Friction Feed	Auto Cutter Spare Blade C13S210040	Paper Width (Roll)
Paper Width (Roll)	254 (10") – 1,626 (64") mm	Cleaning Stick C13S090013	Paper Width (Cut Sheet
Paper Width (Cut Sheet)	210 (A4) – 1,118 (44") mm	Maintenance Box C13T619300	Paper Thickness (Roll)
Paper Thickness (Roll)	0.08 – 1.50 mm	Auto Take-up Reel Unit C12C932201	Paper Margin (Cut Shee
Borderless Sizes	254mm (10"), 300mm (11.8"), 329mm (A3+/A3++), 406mm (16"), 432mm	Roll Adapter C12C932231 Adobe® PostScript® 3™	
	(17"/USC), 508mm (20"), 515mm (20.3"/B2), 594mm (A1), 610mm (24"/A0+),	Expansion Unit C12C891131	Paper Margin (Roll)*1
	728, (29"/B1), 841mm (A0), 914mm (36"/A0+), 1,030mm (B0), 1,118mm	Hard Disk Unit C12C848031	
	(44"/B0+), 1,270mm (50"), 1,372mm (54"), 1,524mm (60")		Maximum Printable Len
Roll Paper Remaining	The remaining amount is managed by the barcode printed on roll paper		Maximum Reel Diamete
Connectivity			Maximum Reel Weight*3
Interface*1	Hi-Speed USB		Maximum Roll Diameter
Printer Language	ESC/P raster		Maximum Reel Weight*
USB Direct Print	Yes		Borderless Sizes
Memory	1.5GB		
Operating System			
PC System Requirement	Windows XP, Vista, 7, 8, 8.1 (32/64bit) or later		
Mac System Requirement	Macintosh Mac OS X 10.6.8 or later		Roll Paper Remaining
Utility Software			Connectivity
Bundled in CD	User's Guide (EN), Network Guide (EN), LFP RemotePanel 2, Epson Color		Interface
	Calibration Utility, EpsonNet Setup, EpsonNet Confi g, EpsonNet Print		Printer Language
	(Windows only)	©2024 Epson Singapore Pte Ltd. All Rights Reserved.	
Web Delivery	LFP Accounting Tool (Job monitoring, consumable cost tracking),	Reproduction in part or in whole, without the written	USB Direct Print
-	HDD Utility software (Web download)	permission from Epson, is strictly prohibited.	Memory
Electrical Specifications		EPSON is a registered trademark of Seiko Epson Corporation.	Operating System
Voltage	AC 100 – 240V, 50/60Hz	All other product names and other company names	PC System Requiremer
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A	used herein are for identification purposes only and are the trademarks or registered trademarks of their	Mac System Requireme
Power Consumption	Operating: Approx. 95W,	respective owners.	Utility Software
	Sleep: Approx. 2.8W,	Epson disclaims any and all rights in those marks.	Bundled in CD
	Standby: Approx. 0.5W	Projected images shown herein are simulations. The actual product design and contents may vary.	
Environmental Conditions		Specifications are subject to change without notice and	
Temperature	Operating: 10°C to 35°C / Storage: -20°C to 40°C	may vary between countries. Please check with local Epson offices for more information.	Web Delivery
Humidity	Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation)	Apple, iPad and iPhone are trademarks of Apple Inc.,	
Dimensions & Weight		registered in the U.S. and other countries. App Store is	Electrical Specification
Dimension (W \times D \times H)	2,415 x 760 x 1,145 mm	a service mark of Apple Inc.	Voltage
Weight	Approx. 171 kg	Android is a trademark of Google Inc.	Rated Current
0	בייייקיי.		
¹ Interface is 1000BASE-T.		Dealer's Stamp	Power Consumption

SPECIFICATIONS

MODEL NUMBER	SC-P20530
SKU Number	C11CK99402
Printing Technology	
Printing Method	PrecisionCore Inkjet Technology, Variable-Sized Droplet Technology
Print Head	PrecisionCore MicroTFP Printhead 9.600 Nozzles
Nozzle Configuration Black	9,600 Nozzles PK, MK, GY, LGY: 800 Nozzles
Colour	C, VM, Y, LC, VLM, OR, GR, V: 800 Nozzles
Maximum Resolution	2,400 x 1,200 dpi
Minimum Ink Droplet Volume	3.5pl
Printing Specifications	
Print Speed	Plain Paper Draft Mode: Approx. 122 m ² h
Line Accuracy	±0.2% or ±.26 mm (whichever greater)
Ink System	· · · · · · · · · · · · · · · · · · ·
Ink Type	Pigment Ink
Ink Brand Name	UltraChrome PRO 12 Ink
Colour	Photo Black, Cyan, Vivid Magenta, Yellow, Matte Black, Grey, Light
	Light Cyan, Vivid Light Magenta, Orange, Green, Violet
Ink Capacity	1,600ml
Ink Case	Ink Supply Unit
Paper Handling	
Paper Path	Roll (Single Roll), Cut Sheet (Manual Feed), Poster Board (Manual Fe
Paper Feed Method	Friction Feed
Paper Width (Roll)	$\frac{254 (10") - 1,626 (64") \text{ mm}}{210 (44") + 1,118 (44") \text{ mm}}$
Paper Width (Cut Sheet)	210 (A4) – 1,118 (44") mm
Paper Thickness (Roll) Paper Margin (Cut Sheet) ^{*1}	0.08 – 0.5 mm With Border (Top, Right, Left): Min. 3 mm / (Bottom): Min 14 mm
Paper Margin (Out Sheet)	Borderless (Top): Min. 3 mm / (Bottom): Min 14 mm / (Right, Left): N
Paper Margin (Roll) ^{*1}	With Border (Top, Right, Left, Bottom): Min. 3 mm
	Borderless (Top, Right, Left, Bottom): Min. 0 mm
Maximum Printable Length ^{*2}	91 m
Maximum Reel Diameter ^{*3}	Max. 190 mm
Maximum Reel Weight ⁻³	Max. 24 Kg
Maximum Roll Diameter*3	Max. 170 mm
Maximum Reel Weight ^{*3}	Max. 24 Kg
Borderless Sizes	254mm (10"), 300mm (11.8"), 330mm (A3+/A3++), 406mm (16"), 4 (17"/USC), 508mm (20"), 515mm (20.3"/B2), 594mm (A1), 610mm 728, (29"/B1), 841mm (A0), 914mm (36"/A0+), 1,030mm (B0), 1,11
	(44"/B0+), 1,270mm (50"), 1,372mm (54"), 1,524mm (60"), 1,626m
Roll Paper Remaining Connectivity	The remaining amount is managed by the barcode printed on roll pa
Interface	SuperSpeed USB, 100BASE-TX / 1000BASE-T (Option)
Printer Language	ESC/P raster, Adobe PostScript 3 ⁻⁴ , Adobe PDF 1.7 ⁻⁴ , TIFF ⁻⁴ , JPEG
	CALS G4 (Type I) ²⁴ , EPS ²⁴
USB Direct Print	Yes
Memory	Physical 6GB (Printer H/W)
Operating System	
PC System Requirement	Windows XP, Vista, 7, 8, 8.1 (32/64bit) or later
Mac System Requirement	Macintosh Mac OS X 10.6.8 or later
Utility Software	
Bundled in CD	User's Guide (EN), Network Guide (EN), LFP RemotePanel 2, Epson
	Calibration Utility, EpsonNet Setup, EpsonNet Config, EpsonNet Pr
	(Windows only)
Web Delivery	LFP Accounting Tool (Job monitoring, consumable cost tracking),
	HDD Utility software (Web download)
Electrical Specifications	
Voltage	AC 100 – 240V, 50/60Hz
Rated Current	AC 100V 3.4AAC 100-240V 3.4-1.6A
Power Consumption	Operating: Approx. 95W,
	Sleep: Approx. 2.2W,
	Standby: Approx. 0.5W
Environmental Conditions	Operating: 10°C to 35°C / Storago: 20°C to 10°C
Temperature Humidity	Operating: 10°C to 35°C / Storage: -20°C to 40°C Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no
Dimensions & Weight	operating. 2070 to 0070 (no condensation), otoraye. 370 to 0070 (no
Dimension (W x D x H)	2,740 x 976 x 1,145 mm
Weight	Approx. 224 kg
woigi it	rppion, 224 ky
 ^{*1} Might differ depends on applications/ ^{*2} Auto Take-up Reel Unit (Option) is ne ^{*3} Printable length is limited depending ^{*4} Adobe[®] PostScript[®] 3TM Expansion U 	eded. on restrictions of operating systems or applications.

Find out more at www.epson.com.sg/gobig-photo

📑 EpsonSingapore 💿 EpsonSingapore 🗈 EpsonSoutheastAsia in Epson Singapore 🕑 EpsonSingapore

Information correct at time of printing. Printed September 2024

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 Epson Singapore Pte Ltd Epson Customer Care Center 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours. Find out more at www.epson.com.sg/gobig-photo



Epson Singapore Pte Ltd 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 Epson Customer Care Center 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

Dimensions	and	Weight
------------	-----	--------

SC-P20530 (Stowed Position) Weight: Approx. 224 kg



WHAT'S IN THE BOX

- Printer AC power cable
- Setup guide
- Software CD-ROM
- Maintenance box

OPTIONS

Auto Cutter Spare Blade	C13S210040
Bulk Ink Solution	C12C939161
Cleaning Sheet	C13S400045
Cleaning Stick	C13S090013
Maintenance Box	C13T619300
Auto Take-up Reel Unit	C12C932201
Roll Adapter	C12C932231
Adobe [®] PostScript [®] 3 [™]	
Expansion Unit	C12C939191
SSD Unit	C12C936671

atte Black, Grey, Light Grey, en, Violet

ster Board (Manual Feed)

ottom): Min 14 mm 1 mm / (Right, Left): Min. 0 mm mm nm

3++), 406mm (16"), 432mm 594mm (A1), 610mm (24"/A0+), , 1,030mm (B0), 1,118mm 524mm (60"), 1,626mm (64") code printed on roll paper

DF 1.7^{*4}, TIFF^{*4}, JPEG^{*4},

RemotePanel 2, Epson Color Config, EpsonNet Print

©2024 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

orage: 5% to 85% (no condensation)

Dealer's Stamp

Information correct at time of printing. Printed September 2024

📑 EpsonSingapore 🧿 EpsonSingapore 🗈 EpsonSoutheastAsia in Epson Singapore 🛃 EpsonSingapore