


SPECIFICATIONS


Model Number	Auto Colour Chart Reading Portable Table
Colour Path Size	14 mm x 14 mm (0.55" x 0.55")
Supported Media Size	329 x 483 mm (A3+ / 13" x 19")
Media Thickness	0 – 13 mm
Connectivity	
Interfaces	Hi-Speed USB Type-B Connector (PC to Auto Colour Chart Reading Portable Table)
Dimensions & Weight	
Main Unit	
Dimensions (L x W x H)	395 x 550 x 128 mm
Weight	3.4 kg
Carrying Case	
Dimensions (L x W x H)	415 x 570 x 145 mm
Weight	1.7 kg
Environment Conditions	
Temperature (°C)	Operating: 10 °C – 35 °C Storage: -20 °C – 40 °C
Humidity	5 – 85% (No Condensation)
Electrical Specifications	
Rated Voltage	AC 100 – 240V
Rated Frequency	50 – 60 Hz
Power Consumption	0.6 A – 0.4 A
Operating System	
Supported OS	Windows 8.1 (64 bit), Windows 10 (64 bit), Windows 11 (64 bit)
Polution Index	PD2
Water Proof Index	IPX0
Maximum Elevation	Below 2,000m
Certifications	Respective country's WEEE / RoHS

Dimensions & Weight

Main Unit
SKU Code: B42B900331
Weight: 3.4kg



Carrying Case
(Included with Main Unit)
Weight: 1.7kg



What's in the box:

- Carrying Case
- Shoulder Strap
- Setup Guide
- Power Cable
- USB I/F Cable
- CD-ROM (OSS License)
- Masking Tape

©2024 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing.
Printed February 2024

SPECIFICATIONS

Model Number	SD-10
Colour Measurement	
Technology	Spectroscopic Device
Spectral Range	400 – 700nm
Sampling Interval	Colour Measurement
Photometric Range	10nm (Interpolation by software)
Measurement Frequency	13 times measurement per second (Scanning Mode)
Measurement Geometry	45° Circumferential / Normal Geometry (45° c : 0°)
Measurement Aperture	Φ 7.6mm
Light Source	LED (Including UV)
Measurement Conditions	• M0: Including UV light component, ISO 13655:2017 measurement condition M0 • M1e: D50 - Including UV light component, measurement conditions equivalent to ISO 13655:2017 measurement condition M1 (Measurement conditions held with a radiant power at all wavelengths from 400 to 700 nm, and power ratios in the 300 to 400 nm and 400 to 500 nm regions similar to D50) • M2: Without UV, ISO 13655:2017 measurement condition M2
Illuminants	D50 / D65 / A / F1 / F2 / F3 / F7 / F8 / F9 / F10 / F11 / F12
Observers	2° / 10°
ΔE Methods	ΔE 2000 / ΔE 1994 (Graphic Arts) / ΔE1994 (Textiles) / ΔE 1976
Calibration	White reference built in the sensor cover
Scan Length	400mm
Inter-Instrument Agreement	0.4 or less ΔE00 average 1.0 or less ΔE00 maximum • Deviation from SD-10 manufacturing standard for 12 BCRA colour tiles (D50, 2°) • Ambient temperature 23°C (73.4°F), humidity 50%
Short Term Repeatability	0.1 ΔE94 White • Average of 10 measurements every 3 seconds on white tile (D50, 2°) • Ambient temperature 23°C (73.4°F), humidity 50%
Colour difference from BCRA tile	Calibration value 1.0 or less Δ E00 average • Deviation from the colour measurement value for 12 BCRA colour tiles (D50, 2°) by a measuring instrument traceable to the national metrological standard • Ambient temperature 23°C (73.4°F), humidity 50%
Language	
Supported Language	English / French / German / Dutch / Italian / Spanish / Portuguese / Turkish / Russian / Simplified Chinese / Traditional Chinese / Korean / Japanese
Connectivity	
Interfaces	• USB Type-C • USB 2.0 Full-Speed • BLE Bluetooth Low Energy
Memory	Number of saved data at Stand-alone (Spot Mode): 100 Colours
Environment Conditions	
Temperature (°C)	Operating: 0 °C – 40 °C (Spot Mode) / 0 °C – 35 °C (Scan Mode) Storage: -20 °C – 60 °C
Humidity	Operating: 5 – 85% (No Condensation) Storage: 5 – 85% (No Condensation)
Electrical Specifications	
Rated Voltage	AC 220 – 240V
Power Consumption	Operating: 5V
Battery Specifications	
Battery Type	Lithium ion battery
Battery Capacity	1,860mAh
Compatible Epson Software	Epson Edge Print Pro / Epson Spectrometer App

Find out more at www.epson.com.sg

Epson Singapore Pte Ltd
Epson Customer Care Center

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6596-5500
100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

[f](#) EpsonSingapore [@](#) EpsonSingapore [▶](#) EpsonSoutheastAsia [in](#) Epson Singapore [v](#) EpsonSingapore

Dimensions & Weight

SD-10
SKU Code: B41CK17402
Weight: 190g




Main Unit Cover (Optional)

Material: Silicon
SKU Code: B42B900101



Alignment Guide (Optional)

Material: Black Part (ABS) /
Transparent Part (PET)
SKU Code: B42B900201



What's in the box:

- Setup Guide*
- Storage Case
- Strap
- USB Type A to C Cable
- Certificate of Calibration

* PDF user guide is provided on the web/CD-ROM of Open-Source software license document.

©2024 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON is a registered trademark of Seiko Epson Corporation.

All other product and company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing.
Printed February 2024

SD-10 SPECTROPHOTOMETER AND
AUTO COLOUR CHART READING PORTABLE TABLE

EPSON

PORTABLE TOOLS
FOR PRECISE COLOUR
MEASUREMENT
ON-THE-GO.



Embrace the digital frontier of colour management effortlessly with Epson's
SD-10 Spectrophotometer and Auto Colour Chart Reading Portable Table.

The Epson SD-10 colour spectrophotometer revolutionises printing workflow by speeding up colour matching and simplifying colour management process. Compatible with the Auto Colour Chart Reading Portable Table, improve your workflow and save time while ensuring colour consistency throughout your printer fleet. Say goodbye to tedious, time-consuming process of analogue colour matching and embrace the ease of measuring, and reproducing colours with the SD-10 and Auto Colour Chart Reading Portable Table.



Battery
Operated*



Colour
Management

(*Rechargeable battery for SD-10 only.)

ENGINEERED FOR good

Epson Edge Color Lite



**Epson
Spectrometer
App**

Portable & Convenient

Weighing just 190g, the SD-10 is lightweight and can be easily carried along with the Auto Colour Chart Reading Portable Table anywhere you go.

Colour Consistency

Connect your smart devices to the Auto Colour Chart Reading Portable Table via a USB Type-C connector for seamless colour consistency in all your prints.

User-Friendly Usage

Easily operate the SD-10 on the go as a standalone device, thanks to its intuitive LCD and built-in battery, ensuring operation independence without the need for a PC.

Find out more at www.epson.com.sg

[f](#) EpsonSingapore [@](#) EpsonSingapore [▶](#) EpsonSoutheastAsia [in](#) Epson Singapore [v](#) EpsonSingapore

Epson Singapore Pte Ltd
Epson Customer Care Center

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6596-5500
100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours.

Combining precision with portability, the SD-10 spectrophotometer performs accurate colour matching with exceptional reliability. Seamlessly compatible with the Auto Colour Chart Reading Table, the SD-10 elevates colour consistency across printer fleets. Rely on the SD-10 to fulfill your requirements for precise and user-friendly colour management.

SUPERIOR USABILITY

Lightweight & Portable
The SD-10 weighs only 190g and is highly portable with its own carrying case and wrist strap.

Main Unit Cover (Optional)
The silicon cover provides minimises scratches, reduces damage from accidental drops and provides additional grip when handling the device. Safeguard your device from dust, scratches, and spills while preserving its pristine appearance.




SD10 with functional LCD Display



Network-free & PC-less Operation
Operate the SD-10 as a stand-alone unit without needing a PC or connecting to the network. The spectrophotometer is equipped with a LCD display and built-in battery for lasting operation and is easily chargeable via USB Type-C cable.

Alignment Guide (Optional)
Perform colour scans precisely with the optional Alignment Guide, on an exact spot or across a larger target area.



SD-10 Alignment Guide

SEAMLESS CONNECTION

Pair the SD-10 with the Auto Colour Chart Reading Portable Table using the attached USB Type-C.*



via USB Type-C*
*SD-10 can connect to PC via USB-C cable.



ACCURATE COLOUR CALIBRATION & VERIFICATION

Colour calibration and verification can be done easily to ensure colour consistency throughout your fleet of Epson printers.


Epson Edge Color Lite



CREATION OF ICC PROFILE

Easily create optimised ICC profiles using the Epson Edge Color Lite to get accurate and consistent colours throughout your Epson large format printer* fleet.

*Printers must be of the same model to maintain colour accuracy.

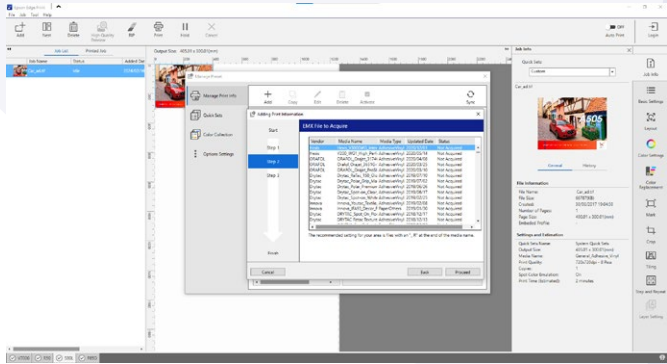

Create ICC profiles optimised for each media type using Epson Edge Print.

PRECISE COLOUR MANAGEMENT WITH AUTO COLOUR CHART READING TABLE

The Auto Colour Chart Reading Portable Table, in collaboration with the SD-10, accurately manages colours for Epson's Large Format printers. This is achieved through creating ICC profiles* for various printing modes and media types, ensuring consistent colours across your printer fleet.

*Works with Epson Edge Print only.



Compatible with:
Epson Edge Color Lite



GREAT PORTABILITY

Conveniently bring the Auto Colour Chart Reading Portable Table to different site locations in its carrying case. During storage, the table can be easily stored without obstructing your workspace.



Compact storage.




Portable and hassle-free.

FUSS-FREE OPERATION

With the automatic media thickness and position function, it takes less than 5 minutes* to scan a 379 colour patch for colour calibration. This significantly improves production workflow and saves time for colour management.

*Based on internal testing.

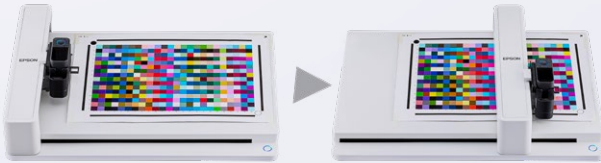

IMPROVED COLOUR MATCHING WORKFLOW

Manual colour matching workflow by traditional colour swatches

Typically repeated **4 to 5 times** on average



- STEP 1**
Receive the printing data from client.
- STEP 2**
Print the data to media customer requested by printer.
- STEP 3**
Compare the printed colour with colour chart by visual judgement.
- STEP 4**
Input of colour values to softwares.
- STEP 5**
Print the adjusted data and confirming accuracy visually.
- STEP 6**
Complete the colour matching.

Eliminate time-consuming process of colour matching in an analogue workflow by going digital with SD-10. Instead of going through multiple visual checking and data adjusting, let Epson's spectrophotometer do the spot colour matching, helping your business save valuable time and costly manpower.

Digital colour matching workflow by SD-10

Typically repeated **1 to 2 times** on average



- STEP 1**
Receive the printing data from client.
- STEP 2**
Measure the targeted colour using SD-10.
- STEP 3**
Alternatively, perform spot colour matching method using the Epson Edge Print Pro.
- STEP 4**
Print the adjusted image.
- STEP 5**
Check for accuracy again using SD-10 and complete the workflow.
- STEP 6**
If necessary, compare using the colour charts for higher accuracy.

*Only solid colour areas can be replaced using the function of spot colour matching in Epson Edge Print Pro.

READY-TO-USE CONVENIENCE

The Auto Colour Chart Reading Portable Table is ready for immediate use upon unpacking from its carrying case, complete with the necessary cables and setup guide. This allows operators to start their work promptly at the onsite location.

*Refer to the specification sheet for bundled items. SD-10 is sold separately.

