
## LARGE FORMAT PRINTER SURECOLOR™ SC-S40670/S60670





The new Epson SureColor™ S-Series printers are Epson's next generation of high-performance eco-solvent signage printers, which incorporates the latest printing technologies to be Epson's most advanced signage printers to date. The printers come with the new sophisticated precision media feeding system, high-performance PrecisionCore™ TFP printheads and a myriad of advanced features that enable them to reliably meet most demanding jobs while minimising operation costs.



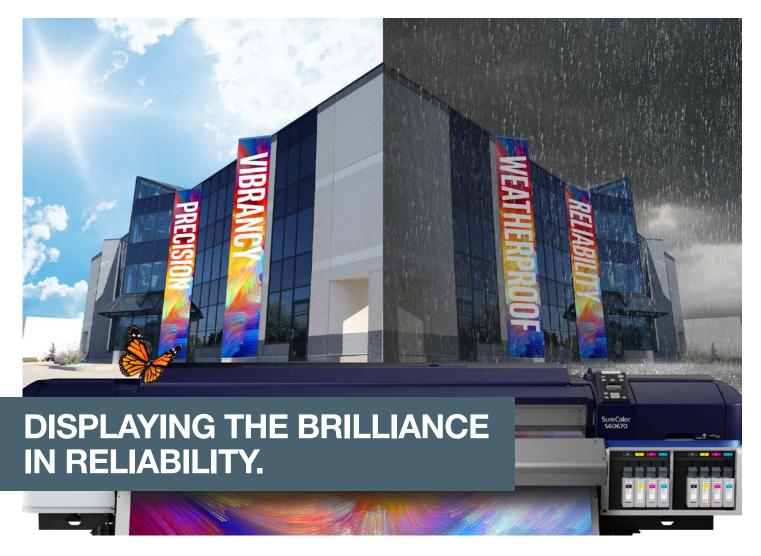

Class criteria for low chemical emissions.

IT'S IN THE DETAILS.



Printheads





Up to 64" wide





Epson Genuine Inks

Environmentally Friendly





۱X.		GS3
	SC-S40670	ULTRACHROME
	SC-S60670	GS3INK

MAXIMUM MEDIA WIDTH 64"

MAX, INK CAPACITY PER COLOUR PRECISIONCORE TFP PRINTHEAD SINGLE



High-volume printing is made ultra-reliable with an advance precision media feeding system to ensure you minimal downtime.

16.6

## **Engineered For Convenience**

Automatic media alignment, printhead cleaning and remote management features ensure you great ease during operations.

## **Exceptional Print Quality**

Showcasing Epson's industry-leading PrecisionCore™ printhead technology and UltraChrome™ GS3 ink, expect consistently vibrant quality with every print.



**Epson Edge** Print

Only available on the SC-S60670.
 Based on 8-pass printing for high quality and 4-pass printing for production, on banner media.

## SPECIFICATIONS SURECOLOR™ SC-S40670/S60670



MODEL NUMBER	SC-S40670	SC-S60670	Dimensions & Weight	·
SKU No.	C11CE44402	C11CE46402	SC-S40670	
Printer Width	64 "		Weight: 279 kg (without ink)	
Printing Technology				↑
Print Head	PrecisionCore™ TFP® Printhead	Dual PrecisionCore™ TFP® Printhead	-	
Nozzle Configuration	360 x 2 nozzles each colour (x4)	360 x 2 x 2 nozzles each colour (x4)		1,338 mm
Maximum Resolution	1440 x 1440 dpi		ATT.	1,000 11111
Minimum Ink Droplet Volume	4.2 pl			
Print Speed				↓
Max Speed - 1 pass	Up to 58.4 m <sup>2</sup> /h (360 x 720 dpi)	Up to 95.3 m <sup>2</sup> /h (360 x 720 dpi)		880 mm
High Speed - 2 pass (Billboard)	Up to 29.4 m²/h (720 x 720 dpi)	Up to 52.3 m <sup>2</sup> /h (720 x 720 dpi)	2,620 mm	2 000 111111
Production 1 - 3 pass	Up to 20.8 m²/h (720 x 720 dpi)		- SC-S60670	
Production 2 - 4 pass	Up to 16.6 m²/h (720 x 720 dpi)	Up to 31.6 m²/h (720 x 720 dpi)	Weight: 291 kg (without ink)	
Production 3 - 6 pass	Up to 11.0 m²/h (720 x 1440 dpi)	Up to 20.7 m²/h (720 x 1440 dpi)		
High Quality - 8 pass	Up to 8.6 m²/h (720 x 1440 dpi)	Up to 14.6 m²/h (720 x 1440 dpi)		<b>1</b>
Max Quality 1 - 12 pass	Up to 4.7 m²/h (1440 x 1440 dpi)	Up to 8.7 m <sup>2</sup> /h (1440 x 1440 dpi)		
Max Quality 2 - 16 pass	Up to 3.5 m²/h (1440 x 1440 dpi)	Up to 6.8 m²/h (1440 x 1440 dpi)		1,338 mm
Max Quality 3 - 24 pass	Up to 2.6 m²/h (1440 x 1440 dpi)	Up to 4.9 m <sup>2</sup> /h (1440 x 1440 dpi)		2
Ink System				
Ink Type	Epson UltraChrome™ GS3 Ink Technology			, , , , , , , , , , , , , , , , , , ,
Colours	4 colours - Cyan, Magenta, Yellow, Black		2,620 mm	972 mm
Ink Capacity	700 ml ink cartridge			
Paper Handling	Rear roll feed (2 " / 3 " core with max 250 mm diameter and up to 45 kg); Auto take-up reel		_	
Media Type			Ink Cartridge Compatibility	
Printable Area			700 ml Ink Cartridges	
Media Width	300 to 1626 mm		Black	C13T892100
Media Thickness	Up to 1 mm		Cyan	C13T892200
Heaters	<u>·</u>		Magenta	C13T892300
Control Panel			- Yellow	C13T892400
Connectivity			Supplies & Optional Accessori	es
Printer Interfaces	ter Interfaces Hi-Speed USB 2.0, 100BASE-TX / 1000BASE-T		350 ml Cleaning Cartridge	C13T696000
Printer Languages	Standard: ESC/P raster		Maintenance Parts Kit	C13S210044
Printer Drivers	=		Ink Cleaner	C13T699300
Memory	512 MB main + 128 MB network		Cleaning Stick	C13S090013
Software	Standard: CD Installer, Communication Driver, EPSON Manuals Launcher, Operators Guides, General		Clean Room Wiper	C13S090016
	Information, Epson Control Dashboard, EpsonNet Contig, EpsonNet Setup, EpsonNet Print, Epson  Ac Software Updater, Epson Edge Print  Mi		Waste Ink Bottle	C13T724000
			Additional Print Drying System  Media Holding Guide	C12C932381 C12C932411
Other Features			Epson Edge Print	C12C932411
Power and Operating Requirements				
Power Requirements	Input voltage AC 100-240 V 50/60 Hz / 10 - 5 A			
Power Consumption	Operating: Approx. 480 W; Standby: Approx.	Operating: Approx. 745 W; Standby: Approx.	_	
	330 W w/ heater ON; Sleep: Approx. 12 W;	445 W w/ heater ON; Sleep: Approx. 13 W;		
	Power Off: Less than 1.5 W	Power Off: Less than 1.8 W		
Recommended Operating			<u> </u>	
Temperature & Humidity	15 - 35 °C; 20 - 80 % RH (non-condensing)			
Printer Dimensions			© 2019 Epson Singapore Pte Ltd. All Ri	
Dimensions	2,620 x 880 x 1,338 mm (W x D x H) (storage)	2,620 x 972 x 1,338 mm (W x D x H) (storage)	Reproduction in part or in whole, withou permission from Epson, is strictly prohib	ited. EPSON and
Weight	279 kg (without ink)	291 kg (without ink)	<ul> <li>EXCEED YOUR VISION are registered tr Epson Corporation. All other products n</li> </ul>	
Bundled Items	Substrate Support System (C12C932361),	Substrate Support System (C12C932361),	company names used herein are for idea	ntification purposes
	Printer Starter Kit (include 1 set of inks and	Additional Print Drying System (C12C932381),	only and are the trademarks or registere their respective owners. Epson disclaim:	s any and all rights
	Epson Edge Print)	Printer Starter Kit (include 1 set of inks and	in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please	
		Epson Edge Print)		
			<ul> <li>check with local Epson offices for more</li> </ul>	intormation.

Information correct as at November 2019