

ESSENTIAL PROJECTORS FOR EFFECTIVE MEETINGS.




Epson business projectors are the essential choice for your office with convenient features from wide connectivity options to space-saving designs. Enjoy cost-savings from long lamp-life and maintenance cycles that will benefit your business in the long run. Complete with brilliant colours and quality images, choose Epson for business projectors that meets your needs.



EB-S29/X29/97H/98H/945H/965H



EB-955WH



All-in-One Essentials

Enhance your meetings with key features such as flexible placement and versatile connectivity.

Cost-saving Features

Save time and money with 10,000 hours for both lamp-life (in eco-mode) and air filter maintenance cycle.

Stunning Colour Brightness

High colour light lumen lets you achieve sharp images and dazzling colours that will enhance every presentation.



Enjoy easy mobile presentations with Epson's multimedia projector series. Versatile, user-friendly and equipped with advanced features such as wireless transmission, multi-PC projection and HDMI connection, these projectors deliver smooth and high-contrast presentations whenever and wherever you need.




Enhanced Features for Superior Performance

1.6x Zoom Lens

Enjoy greater placement flexibility with 1.6x zoom lens*. With wider lens, you can position the projector closer to the screen to free up valuable room and desk space.

Narrow zoom ratio

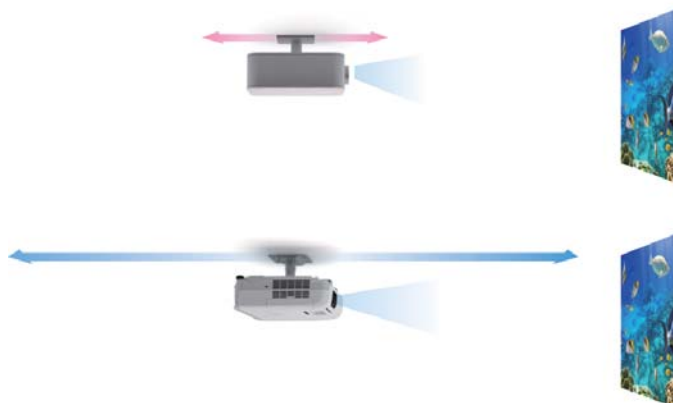

Multi-PC Projection

With the control of a host PC, up to 50 terminals can be connected via the multi-PC projection from a single projector. The host PC acts as a moderator, selecting media from up to four terminals to be projected simultaneously. With the moderator function, you can maintain control and prevent tampering with what's projected on screen.



* Applicable on EB-945H/965H/955WH only.

Wireless Transmission

Enjoy enhanced connectivity and flexibility with Wi-Fi connectivity*. Easily share and transmit images, text and files from your smart devices using the "Epson iProjection" application for smooth and smart projections. And with an additional attachment piece holding the wireless LAN adaptor in place, your transmissions will never be interrupted.

* Wireless LAN adaptor ELPAP07 is required.



Epson iProjection

The Epson iProjection application enables a wireless connection for projecting images and files from your smart devices. The new "QR Code Reader" function makes this wireless connection even easier by simply reading the QR code that is projected on the screen from your smart devices.



* In iProjection, projector profile search, multi-screen display, distribution function, audio transfer, movie file transfer, interrupt connection disabling and encryption data transfer capabilities are not supported.



High Contrast Ratio

Add brilliance to your presentations. Boasting stunning brightness of up to 3,500 lumens and a high contrast ratio of 10000:1, these projectors enable you to project beautiful, well-defined images wherever you are, regardless of ambient light.



Horizontal Keystone Adjuster

Deliver powerful presentations anywhere in the room. With the easy-to-use sliding Horizontal Keystone Adjuster, screen corrections can be done quickly, easily and accurately, even in a limited space.

With automatic vertical keystone detection and adjustment, there is no longer any need for awkward and time-consuming manual image adjustments that interrupt the smooth flow of your presentation delivery. This handy feature automatically detects the projector's vertical keystone distortion and corrects it instantly.



Wide-ranging Connectivity

Advanced connectivity features mean convenient and hassle-free projections of your presentations. With a wide-ranging interface, you can choose from a variety of connection methods including HDMI, VGA and LAN. In addition, these projectors are equipped with two HDMI ports, one of which is MHL-enabled*, for greater digital compatibility.

Simply connect your MHL-compatible device with the MHL cable to fully enjoy your contents on the big screen. What's more, when connected, you can charge your smart device and operate it using the projector's remote control.



2 HDMI + MHL

* Applicable for EB-97H/98H/945H/955WH/965H only.

Redirected Exhaust

The front-facing exhaust is intelligently positioned to prevent anyone from being exposed to the hot exhaust, especially when on a narrow table. This allows the audience to fully concentrate on the presentation, even if they are seated beside or behind the projector.



Epson Projectors



Other projectors with side exhaust

Split Screen

Display images from two different sources side by side on the same screen for a more effective presentation. In video conferences, for example, images of presentation materials and remote participants can be shown simultaneously. What's more with Digital x Digital compatibility, you'll enjoy sharper, more vibrant projections.



Superior Sound Quality

The built-in 16W speaker* provides ample sound even in large rooms, removing the need for external speakers to save you valuable time and money.



* Applicable for EB-97H/98H/945H/965H/955WH only.

Easy-to-replace Lamps

With the lamp cap located on the upper side of the projector, you can change lamps easily even if the projector is installed on the ceiling. Lamps can be replaced quickly without tools and dismantling of the projector from the ceiling mount.



Firmware Updates

Easily update your projector's firmware without having to take it to a service centre. To update, simply insert a USB memory stick with the necessary software. Updates can be done over LAN network or via a USB-B connection.



Auto Power On


With the auto power on function, projection starts automatically once a projection signal is detected via VGA cable, providing you with an easy and hassle-free presentation.



Long-lasting Performance

Longer Lamp Life

With a long lamp life of 10,000 hours in eco-mode, the frequency of costly lamp replacements is reduced, saving you time and money.



Air Filter

With a maintenance cycle of 10,000 hours in eco-mode, the need for regular maintenance of the air filter is minimised to save you time and money.



Eco Features

- Uses just 0.26W of power in standby mode
- Projector optics employ lead-free lenses
- Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing do not contain chlorine or bromine

Better Products for a Better Future™

For more information on Epson's environmental programmes, visit <http://global.epson.com/SR/environment>.

PARTNERS IN PERFECTION

Wireless LAN Adaptor ELPAP07



Supports 802.11 b/g/n connection
Compatible with all Epson wireless-enabled projectors

Desktop Document Camera ELPDC20



3kg / 6.6lbs
2 megapixels with 30fps
12 x optical zoom
1080p output resolution
HDMI digital connectivity

Ultra-portable Document Camera ELPDC06



Easily portable; 0.96kg / 2.11lbs
1.92 megapixels with 15fps
4 x digital zoom
USB powered



SEE VIBRANT, REALISTIC COLOURS WITH HIGH COLOUR BRIGHTNESS.

A New Specification

Projectors have always had their brightness rated only for white light. However, they may have very different colour brightness levels. The Colour Brightness specification provides a new way for buyers to compare the holistic performance (white and colour light brightness) of projectors to make a more informed decision.



Epson
Colour Brightness 2600 Lumens
White Brightness 2600 Lumens

Competitor
Colour Brightness 750 Lumens
White Brightness 2700 Lumens

What is Colour Brightness?

As the term implies, Colour Brightness is a new international standard that states a projector's colour light output in lumens. It measures the brightness of a projector's red, green and blue light.

These are the measurements to look for:

Colour Brightness - Colour Light Output

White Brightness - White Light Output



Epson

Competitor

* Compared against similarly-priced leading 1-chip DLP® business and education projectors based on NPD data from July 2011 through June 2012 (available from www.npd.com). Colour brightness (colour light output) measured in accordance with IDMS 15.4. Actual colour brightness will vary depending on actual usage conditions. 3LCD® is a registered trademark of Seiko Epson Corporation. DLP® is a registered trademark of Texas Instruments, Inc. and its use here does not imply any affiliation with or endorsement by them.

Why Does Colour Brightness Matter?

Even if a projector has high white brightness, it's Colour Brightness could be as low as 1/3 of its white light brightness specification. With a projector that has high Colour Brightness, you'll see vibrant, realistic colours; but if Colour Brightness is low, colours can look dull and dark, skin tones can be reproduced poorly and important details can be lost.





Epson

Competitor

How to Find a Projector's Colour Brightness?

1. Look for separate Colour Brightness and white brightness specification.
2. Projectors with similar white brightness levels can have vastly different and significantly lower Colour Brightness levels.
3. Many manufacturers may not want you to know their projectors are only 1/3 as bright when measuring colour.



www.epson.com.sg/colourbrightness


EPSON 3LCD TECHNOLOGY – FOR BRIGHT, FAITHFUL COLOURS

3LCD projectors offer brighter and more accurate colours as they produce different shades and hues by filtering, then mixing beams of the three primary colours (red, green and blue).

In a 3LCD projector, white light is first split into the three beams of primary colours. Each beam is then filtered through its own LCD that will give each individual pixel of the image its exact brightness for each colour. The colour beams are then perfectly recombined in a prism before being projected out as a complete image.

This compares to projectors using single-chip technology that actually project individual colours sequentially by filtering their single white light beam through a colour wheel, and then relying on human colour perception to combine the colours in the viewers' minds.

As a result, 3LCD projectors also offer greater detail, smoother gradations, no "colour breakup" effect, are easier on viewers' eyes, and consume about 25% less power to achieve the same brightness compared to a single-chip projector using a lamp of the same wattage.

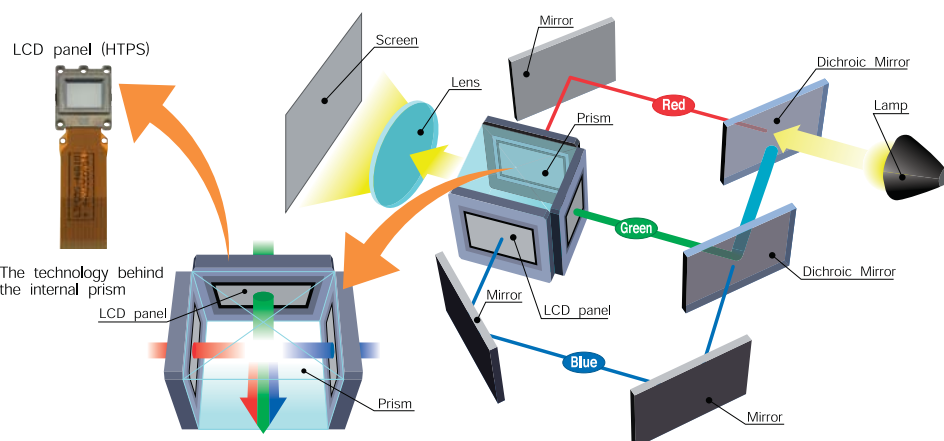

3LCD projector : RGB are projected at the same time, which makes the single composite image easy on the eyes.

• An independent test by projector review media ProjectorCentral.com in 2009 of about 800 projectors found that on average, 3LCD projectors use 25% less power than single-chip projectors.



www.3lcd.com

MODEL NUMBER		EB-S29	EB-X29	EB-97H	EB-98H
Projection Technology		RGB liquid crystal shutter projection system (3LCD)			
Specifications of Main Parts					
LCD	Size	0.55" without MLA (D7)	0.55" with MLA (D8)	0.55" without MLA (D8)	0.55" with MLA (D8)
Native Resolution	SVGA	SVGA	XGA		
Projection Lens	Type	No Optical Zoom / Focus (Manual)	Optical Zoom (Manual) / Focus (Manual)		
	F-Number	1.44	1.58 - 1.72		
	Focal Length	16.7mm	16.9 - 20.28 mm		
	Zoom Ratio	1.0 - 1.35 (Digital Zoom)	1 - 1.2		
	Throw Ratio	1.45 - 1.96 (Wide - Tele)	1.48 - 1.77 (Wide - Tele)		
Lamp	Type	200W UHE			
	Life (Normal / Eco) ¹	5,000 hours / 10,000 hours			
Screen Size (Projected Distance)					
Zoom : Wide		30" - 350" [0.88 - 10.44 m]	30" - 300" [0.89 - 9.12 m]		
Zoom : Tele		22" - 260" [0.88 - 10.44 m]	30" - 300" [1.07 - 10.95 m]		
Brightness ²					
Colour Light Output (Normal)		3,000lm	2,700lm		3,000lm
White Light Output (Normal)		3,000lm	2,700lm		3,000lm
Contrast Ratio					
Auto Iris: On		10,000:1			
Video Quality		3D Y/C Separation, Noise Reduction, Motion Compensated Interlace-Progressive Conversion (2-2,3-2 Film Detection)			
Colour Mode		Dynamic, Presentation, Theatre, sRGB, Blackboard			
Internal Speaker(s)					
Sound Output		5W Monaural		16W Monaural	
Keystone Correction					
Vertical / Horizontal		±30° / ±30° (Slide Bar)			
Auto Keystone Correction		Yes (Vertical)			
Connectivity					
Analog Input	D-Sub 15pin	2 (Blue)			
	Composite	RCA x 1 (Yellow)			
	S-Video	Mini DIN x 1			
Digital Input	HDMI	1		2 (1 x MHL)	
Audio Input	RCA (White/Red)	1			
	Stereo Mini Jack	2			
Audio Output	Stereo Mini Jack	1			
USB Input	USB Type A	1 (for USB Memory, USB Document Camera, Wireless LAN, Firmware Update)			
	USB Type B	1 (for USB Display, Mouse, K/B, Control, Firmware Update)			
Mic I/O	Stereo Mini Jack	N/A		1	
Control I/O	RS-232C	D-Sub 9pin x 1			
Network	Wired LAN	N/A		1	
	Wireless LAN	Optional (ELPAP07)			
Wireless Specifications					
Supported Speed For Each Mode ³		IEEE 802.11b: 11 Mbps, IEEE 802.11g: 54 Mbps, IEEE 802.11n: 130 Mbps			
Wireless LAN Security		WPA-PSK (TKIP/AES) / WPA2-PSK (TKIP/AES)			
Operating Temperature					
		5 - 35 °C <41 - 95 °F> (20% - 80% Humidity, No Condensation)			
Operating Altitude					
		0 - 3,000 m <0 - 9,843 ft> (over 1,500m / 4,921ft: with high altitude mode)			
Direct Power On / Off					
		Yes			
Start-Up Period					
		5 seconds, Warm-up Period: 30 seconds			
Cool Down Period					
		Instant Off			
Power Supply Voltage					
		100 - 240 V AC ±10%, 50/60 Hz			
Power Consumption (220 - 240V)					
Lamp On (Normal / Eco)		273W / 204W		287W / 215W	
Standby		0.26W			
Dimension Excluding Feet (D X W X H)					
		244 x 297 x 87 mm			
Weight		2.5kg	2.6kg	2.7kg	
Fan Noise (Normal / Eco)					
		37dB / 29dB			

¹ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

² Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

³ Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

Supplied Accessories

Power Cable: 1.8m
Computer Cable (VGA Cable): 1.8m
Remote Control: Yes, with battery attached
Soft Carrying Case

Optional Accessories

Spare Lamp: ELPLP88
Air Filter: ELPAF32
Wireless LAN Adaptor: ELPAP07
Quick Wireless Connection USB Key: ELPAP09
Ceiling Mount: ELPMB23

EB-S29



EB-X29



EB-97H / EB-98H



©2015 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing
Printed February 2015



Sales Enquiries
6586 3111



EpsonSEA @EpsonSEA EpsonSoutheastAsia Epson Southeast Asia

To find out more, visit **www.epson.com.sg/projectors** or call **+65 6586 3111**

MODEL NUMBER		EB-945H	EB-955WH	EB-965H
Projection Technology		RGB liquid crystal shutter projection system (3LCD)		
Specifications of Main Parts				
LCD	Size	0.63" with MLA (D7)	0.59" with MLA (D8)	0.63" with MLA (D7)
	Native Resolution	XGA	WXGA	XGA
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)		
	F-Number	1.51 - 1.99		
	Focal Length	18.2 - 29.2 mm		
	Zoom Ratio	1 - 1.6		
Lamp	Throw Ratio	1.38 - 2.24 (Wide - Tele)		
	Type	200W UHE		
	Life (Normal / Eco) ¹	5,000 hours / 10,000 hours		
Screen Size (Projected Distance)				
Zoom : Wide		30" - 300" [0.83 - 8.54 m]	33" - 280" [0.97 - 8.45 m]	30" - 300" [0.83 - 8.54 m]
Zoom : Tele		30" - 300" [1.36 - 13.86 m]	33" - 280" [1.59 - 13.71 m]	30" - 300" [1.36 - 13.86 m]
Brightness ²				
Colour Light Output		3,000lm	3,200lm	3,500lm
White Light Output (Normal / Eco)		3,000lm	3,200lm	3,500lm
Contrast Ratio				
Auto Iris: On		10,000:1		
Video Quality		3D Y/C Separation, Noise Reduction Motion Compensated Interlace-Progressive Conversion (2-2,3-2 Film Detection)		
Colour Mode		Dynamic, Presentation, Theatre, sRGB, Blackboard		
Internal Speaker(s)				
Sound Output		16W Monaural		
Keystone Correction				
Vertical / Horizontal		±30° / ±30° (Slide Bar)		
Auto Keystone Correction		Yes (Vertical)		
Connectivity				
Analog Input	D-Sub 15pin	2 (Blue)		
	Composite	RCA x 1 (Yellow)		
	S-Video	Mini DIN x 1		
Digital Input	HDMI	2 (1 x MHL)		
Audio Input	RCA (White/Red)	1		
	Stereo Mini Jack	2		
Audio Output	Stereo Mini Jack	1		
USB Input	USB Type A	1 (for USB Memory, USB Document Camera, Wireless LAN, Firmware Update)		
	USB Type B	1 (for USB Display, Mouse, K/B, Control, Firmware Update)		
Mic I/O	Stereo Mini Jack	1		
Control I/O	RS-232C	D-Sub 9pin x 1		
Network I/O	Wired LAN	1		
	Wireless LAN	Optional (ELPAP07)		
Wireless Specifications				
Supported Speed For Each Mode ³		IEEE 802.11b: 11 Mbps, IEEE 802.11g: 54 Mbps, IEEE 802.11n: 130 Mbps		
Wireless LAN Security		WPA-PSK (TKIP/AES) / WPA2-PSK(TKIP/AES)		
Operating Temperature		5 - 35 °C <41 - 95 °F> (20% - 80% Humidity, No Condensation)		
Operating Altitude		0 - 3,000 m <0 - 9,843 ft> (over 1,500m / 4,921ft: with high altitude mode)		
Direct Power On / Off		Yes		
Start-Up Period		5 seconds, Warm-up Period: 30 seconds		
Cool Down Period		Instant Off		
Power Supply Voltage		100 - 240 V AC ±10%, 50/60 Hz		
Power Consumption (220 - 240V)				
Lamp On (Normal / Eco)		287W / 215W		
Standby		0.26W		
Dimension Excluding Feet (D X W X H)		269 x 297 x 87 mm		
Weight		2.9kg		
Fan Noise (Normal / Eco)		37dB / 29dB		

¹ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

² Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

³ Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

Supplied Accessories

Power Cable: 1.8m
Computer Cable (VGA Cable): 1.8m
Remote Control: Yes, with battery attached
Soft Carrying Case

Optional Accessories

Spare Lamp: ELPLP88
Air Filter: ELPAF32
Wireless LAN Adaptor: ELPAP07
Quick Wireless Connection USB Key: ELPAP09
Ceiling Mount: ELPMB23

EB-945H / EB-955WH / EB-965H



©2015 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing
Printed February 2015



Sales Enquiries
6586 3111



EpsonSEA @EpsonSEA EpsonSoutheastAsia Epson Southeast Asia

To find out more, visit **www.epson.com.sg/projectors** or call **+65 6586 3111**