




**GREATER ACCESS TO DATA  
WITH FLEXIBLE CONNECTIVITY.**

Epson Moverio BT-35E is the first in its series that is integrated with an interface box, thus expanding the scope of connectivity and usability with a responsive display. Transmit videos and data by utilising the HDMI or USB-C connectivity port for incredible, low latency experience. Enhance productivity as the Moverio BT-35E overlays intuitive visual assistance in your line of sight in crisp and clear HD display. This allows the convenience of hands-free operations. Along with its robust yet flexible ergonomics, catering to a wide range of head sizes, the Moverio BT-35E can be comfortably worn by anyone for over long periods of time.

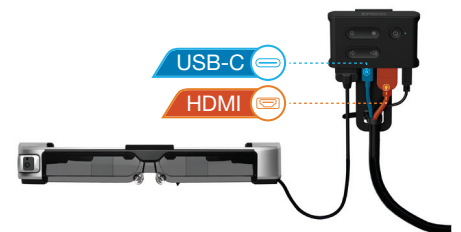

**IT'S IN THE DETAILS.**

Si-OLED display technology delivers richer colours and brighter contrasts for quality augmented reality experience.

**Boost Productivity**

Improve efficiency and convenience in accomplishing tasks as heads-up display minimises the need for head movements.

**Versatile Connectivity**

Eliminate high-latency issues with HDMI and USB-C, which offers connectivity to a range of external devices for transmission of data.


**Remarkable Durability**

Adjustable to any head size for maximum comfort. Sturdy temple design provides reliability and increased product lifespan.


|   |  |  |
|---|--|--|
| <b>Technology</b>   |  |  |
| Model Type  | See -Through Binocular Smart Glasses                             |  |
| <b>Optical</b>  |  |  |
| Display Device Type   | Si-OLED (Silicon - Organic Light-Emitting Diode)                 |  |
| Driving Method  | Mono Crystalline Silicon Active Matrix                           |  |
| Display Size  | 0.43 inch wide panel (16:9)                                      |  |
| Pixel Number  | 921,600 pixels (1280 x 720)                                      |  |
| Refresh Rate  | 30 Hz  |  |
| Field of View   | 23 ° (Diagonal)  |  |
| Screen Size (Projected Distance)  | 40 inch at 2.5 m - 320 inch at 20 m                              |  |
| <b>Sensors</b>  |  |  |
| Camera - Image Capturing  | 5 Megapixels   |  |
| Compass   | Yes, 3 - Axis in Headset   |  |
| Gyroscope   | Yes, 3 - Axis in Headset   |  |
| Accelometer   | Yes, 3 - Axis in Headset   |  |
| Ambient Light Sensor  | Yes (10 - 30,000 Lux)  |  |
| <b>Connectivity</b>   |  |  |
| USB Connection  | USB Type C   |  |
| Audio Jack  | 3.5 $\phi$ 4 Pole Mini-jack, CTIA Type                           |  |
| <b>Video Input</b>  |  |  |
| HDMI Type A   | HDMI   | ver. 1.4   |
|   | Resolution   | 1920 x 1080 @ 60Hz / 59.94Hz, 1280 x 720 @ 60Hz / 59.94Hz, 1280 x 720 @ 30Hz, 640 x 480 @ 60Hz |
|   | HDCP   | ver. 1.4   |
|   | EDID   | Supported  |
| USB Type-C  | Audio Codec  | LPCM (32 kHz, 44.1 kHz, 48 kHz)  |
|   | Video I/F  | DisplayPort Alternate Mode (DP Alt Mode)   |
|   | DisplayPort  | ver. 1.2   |
|   | Resolution   | 1920 x 1080 @ 60Hz / 59.94Hz, 1280 x 720 @ 60Hz / 59.94Hz, 1280 x 720 @ 30Hz, 640 x 480 @ 60Hz |
|   | Audio Codec  | LPCM (32 kHz, 44.1 kHz, 48 kHz)  |
|   | EDID   | Supported  |
| HDCP  | ver. 1.3   |  |
| <b>Sound Output</b>   |  |  |
| Maximum Audio Output Level  | Under 27 mV  |  |
| <b>General</b>  |  |  |
| Operating Temperature   | 5 °C to 35 °C, 20 % to 80 % Humidity (No Condensation)           |  |
| Storage Temperature   | -10 °C to 60 °C, 10 % to 90 % Humidity (No Condensation)         |  |
| Power Supply Voltage Interface Box  | 5.0 V, 1.5 A (DC Input) via USB Micro-B, or 1.5 A via USB Type-C |  |
| Power Supply Voltage AC Adapter   | 100 - 240 V AC +/- 10%, 50 / 60 Hz with Micro USB Cable          |  |
| Water Proof   | Headset: Waterproof Against Light Rain (IP x 2)                  |  |
| <b>Dimensions</b>   |  |  |
| Headset (W x D x H)   | 193 mm x 189 mm x 30 mm (Without Shade)                          |  |
| Interface Box (W x D x H)   | 85 mm x 52 mm x 15 mm  |  |
| <b>Weight</b>   |  |  |
| Headset   | 119 g (Without Shade, Harness)                                   |  |
| Interface Box   | 45 g (Without Belt Clip and Cable Retainer)                      |  |
| <b>What's in the box</b>  |  |  |
| AC Adaptor, Plug Attachment, USB Cable, Carrying Case, Belt Clip Screw, Cable Retainer, Belt Clip, Clip-on Shade x 1 (Dark), Quick Setup Guide, User Manual |  |  |
| <b>Optional</b>   |  |  |
| Glasses Strap, Carrying Case  |  |  |

**Dimensions & Weight**

**Weight: 119 g**



**Weight: 45 g**



© 2018 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Android is a trademark of Google Inc. Dolby® and Dolby® Mobile are registered trademarks of Dolby Laboratories.

Dealer's Stamp

Information correct at time of printing  
Printed November 2018