

EPSON

Epson Device Admin User's Guide

About this Manual

Marks and Symbols



Caution:

Instructions that must be followed carefully to avoid bodily injury.



Important:

Instructions that must be observed to avoid damage to your equipment.

Note:

Instructions containing useful tips and restrictions on printer operation.

Related Information

➔ Clicking this icon takes you to related information.

Artwork

Screenshots used in this manual are currently under development. They may differ from the release version.

Operating System References

In this manual, terms such as "Windows 11", "Windows 10", "Windows Server 2025", "Windows Server 2022", "Windows Server 2019", "Windows Server 2016" refer to the following operating systems. Additionally, "Windows" refers to all versions.

- Microsoft® Windows® 11 operating system
- Microsoft® Windows® 10 operating system
- Microsoft® Windows Server® 2025 operating system
- Microsoft® Windows Server® 2022 operating system
- Microsoft® Windows Server® 2019 operating system
- Microsoft® Windows Server® 2016 operating system

Contents

About this Manual

Marks and Symbols.	2
Artwork.	2
Operating System References.	2

Epson Device Admin Features

Main Features.	5
Configuring the System.	6
Languages.	6

Setting Up

System Requirements.	7
Hardware.	7
Software.	7
Notes on operation.	9
Installing.	9
Preparing to install.	9
Installing for the first time and changing features.	9
Starting up and closing Epson Device Admin.	14
Top Screen.	15
Discovering Devices when Starting Epson Device Admin for the First Time.	16
System settings.	16

Operation Screen

Side bar task menus.	17
Device management.	18
Alert management.	20
Report management.	21
Configuration template management.	22

Installation Settings

Setting Options.	24
Options screen.	24
Mail.	26
Timing.	29
Formats.	30
Startup.	31
Customize Ribbon.	32
Check for updates.	33
Registering to the device list.	33
Discovering devices.	34

Specifying individual devices.	37
Updating Device Information.	38
Group Management.	39
Create and edit user-defined groups.	39
Exporting and importing device information.	46
Group editing.	47
Deleting a group.	49

Device Management

Device Settings.	51
Settings Template.	51
Creating a configuration template.	51
Applying configuration template.	55
Editing configuration templates.	59
Exporting and importing configuration templates.	60
Setting or changing devices one at a time.	60
Device properties screen.	60
Using an embedded web server to make device settings.	63
Setting an Administrator Password.	64
Setting individually.	64
Managing passwords in batches.	65
Registering Different Address Books.	71
Editing individually.	71
Making batch settings.	74
Updating Device Firmware.	79
Updating firmware.	79
Firmware Update Schedule.	80

Daily Management

Managing the Device List.	90
Collecting information regularly.	90
Displaying the device list settings.	91
Managing Alerts.	95
Creating alerts.	95
Adding groups monitored by alerts.	98
Setting the alert confirmation interval.	98
Editing alerts.	99
Switching the alert display.	100
Report Management.	101
Creating reports.	101
Acquiring data.	118
Setting the data collection time and saving period.	119

Switching the report display.	121
Sending archived reports by email.	124
Saving and deleting archived reports.	125

Maintenance

Printing a Status Sheet.	127
Backing up and Restoring.	127
Items that can be backed up and restored.	127
System settings.	128
Device list.	130
Password settings.	133
Address books.	136
Configuration templates.	141
Deleting Personal Information from the Epson Print Admin Serverless or AuthenticationJob History.	143

Troubleshooting

Cannot discover devices..	145
Cannot change the network interface, or cannot use it on the network..	145
You do not know the IP address..	146
The message "The network connection is invalid or not set. Check the network settings." is displayed when running Epson Device Admin..	146
Not Ready is displayed as the IP Address on the device list..	146
IP address changes on its own..	147
Devices from other companies are not displayed in the device list, or they are displayed but not enough device information has been acquired..	147


Appendix

Secondary Device Management Method.	148
Assigning IP address.	148
Checking for overlapping items.	148
Batch Settings.	149
Assigning information automatically.	150
Assigning information from settings one at a time (Manually assigned).	154
Creating a SYLK file to describe the settings.	159
Backing up device settings.	165
Setting items for the SYLK file.	168
Copyright and Trademarks.	172
Notices.	173

Epson Device Admin Features

Main Features

Epson Device Admin is an application that allows you to install devices on the network, and then configure and manage the devices. The following outlines the main features.

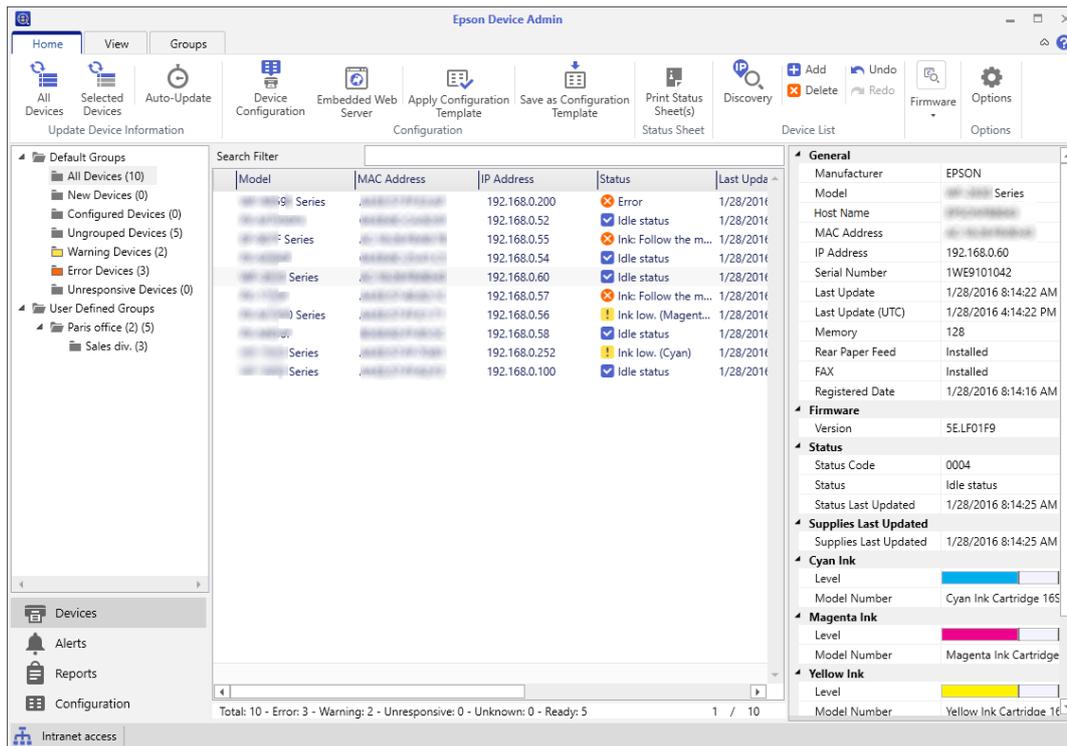

Discovering devices

You can discover devices on the network, and then register them to a list. If Epson devices such as printers and scanners are connected to the same network segment as the administrator's computer, you can find them even if they have not been assigned an IP address.

Setting devices

You can make a template containing setting items such as the network interface and the paper source, and apply it to other devices as shared settings. When it is connected to the network, you can assign an IP address on a device that has not been assigned an IP address.

Monitoring devices

You can regularly acquire the status and detailed information for devices on the network. You can also monitor devices from other companies that have been registered to the device list.

Managing alerts


You can monitor alerts about the status of devices and consumables. The system automatically sends notification emails to the administrator based on set conditions.

Managing reports

You can create regular reports as the system accumulates data on device usage and consumables. You can then save these created reports and send them by email.

Configuring the System

You can manage devices by setting up the following system.

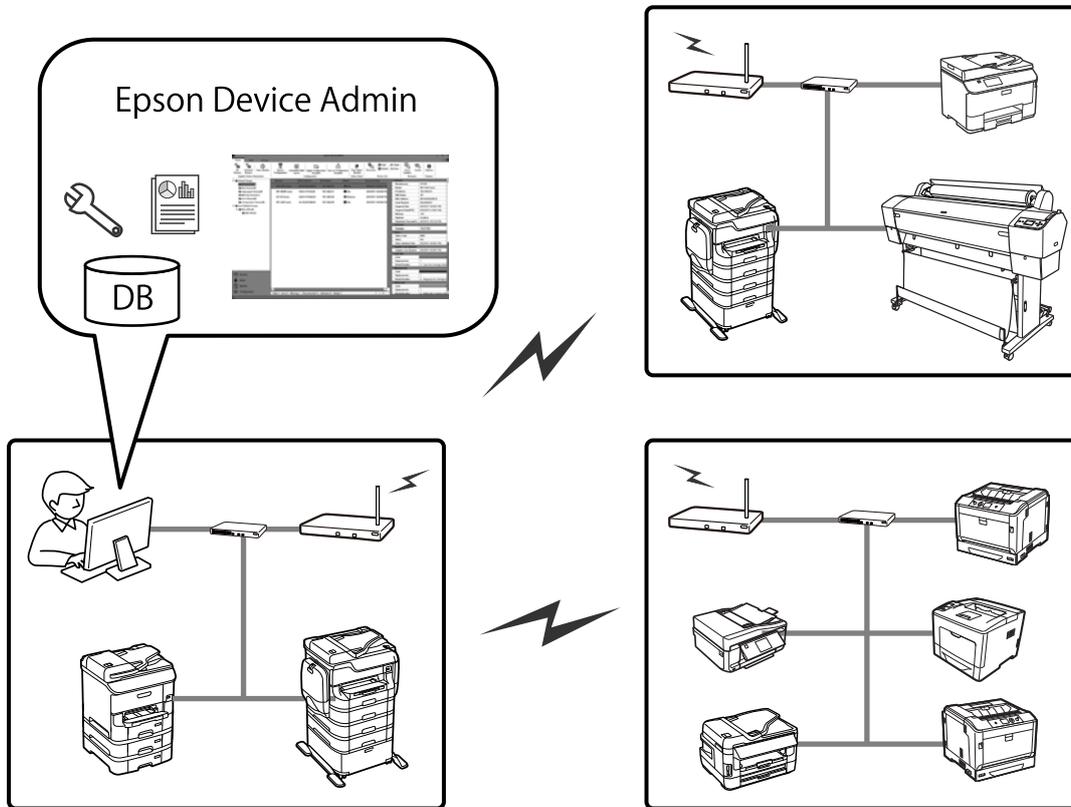

Epson Device Admin system

This is a station where a computer for an IT administrator is installed so that devices can be managed.

Computers for an IT administrator

Device Admin Client

This software should be installed on the computer for the IT administrator.

Device Admin Agent

This is installed along with this software, and then operates a service as part of a system. The regularly acquires information, prepares reports, and sends alert notifications. The Device Admin Agent Monitor monitors whether or not the Device Admin Agent operates correctly.

EDA database

This is installed in this software and records all information.

Languages

Epson Device Admin supports the following languages.

English, French, Italian, Germany, Spanish, Chinese (traditional), Russian, Portuguese (Brazilian), Chinese (Simplified), Portuguese (Portuguese), Dutch, Polish, Korean, Japanese

Setting Up

System Requirements

The following requirements are necessary to install this software.

Hardware

Minimum system requirements

- CPU: 2.0 GHz or faster x86/x64 processor
- Memory: 4 GB or more
- Hard disk: 500 MB or more free space (except Database usage)
- Display: 1024 x 768 or higher monitor resolution, High Color 32 bit

Recommended system requirements

- CPU: 2.8 GHz or faster x64 processor (server system)
- Memory: 8 GB or more
- Hard disk: SSD, 500 MB or more free space (except Database usage)
- Display: 1920 x 1080 or higher monitor resolution, High Color 32 bit

Software

Recommended Software

- Runtime: .NET Framework 4.7.2
- Latest version of Microsoft Edge or Google Chrome
This is necessary when displaying an archive report.

Ports to use

Epson Device Admin continuously listens to several ports, therefore those ports must be opened for specific features. The following are the ports used by Epson Device Admin.

Protocol	Port Number	IN/OUT	Usage
SNMP(UDP)	161	OUT	Use this to acquire information on devices (SNMP).

Protocol	Port Number	IN/OUT	Usage
ENPC(UDP)	3289	OUT	Use this in the following cases. <input type="checkbox"/> To discover and configure devices on the network <input type="checkbox"/> To update firmware <input type="checkbox"/> To collect device information If the device's IP is automatically assigned by DHCP, you can use ENPC to obtain the changed IP address to check if the device's IP has changed.
SLP(UDP)	427	OUT	Use this to discover devices on the network (SLP).
HTTPS(TCP)	443	OUT	Use this to communicate by HTTPS, auto update, and update firmware.
HTTP(TCP)	80	OUT	Use this to update the firmware for printers.
SMTP(TCP)	25 (default)	OUT	Use this for the SMTP server that sends email. Change the port number depending on the server.
SMTP(Auth)	587 (default)	OUT	Use this to send email using extended SMTP for security.
POP3(TCP)	110	OUT	Use this to send email using POP before SMTP.
ENTP(TCP&UDP)	1865	OUT	Use this to acquire information about the network scanner.
TCP 10015	10015 (default)	IN&OUT	Use this to request interfaces that communicate between services and this software.
HTTP Alternate(TCP)	8080 (default)	OUT	Use this to configure the proxy server settings and access the Internet.
TCP 64122	64122	OUT	Use this for check scanner communication.
DNS(TCP)	53	OUT	Use this to acquire host name.
NBNS(UDP)	137	OUT	Use this to acquire host name.
LLMNR(UDP)	5355	OUT	Use this to acquire host name.
LDAP(TCP)	389 (default)	OUT	Use this for the LDAP server. Change the port number depending on the server.
RAW(TCP)	9100	OUT	Use this to update the firmware for laser printers.
PING(ICMP)	-	OUT	Respond to a PING.

Windows services

This software registers the following as Windows services when setting up.

- Epson Device Admin Agent
- Epson Device Admin Agent Monitor

Virtual environment

This software will also operate under the following virtual environments. However, performance may decline depending on the environment.

- Hyper-V
- VMWare vSphere

Notes on operation

- Disable your computer's sleep function, otherwise this software will not operate correctly.
- If you change the time zone setting while this software is operating, it will be applied after restarting.
- This software only supports IPv4.
- We recommend using servers for 24 hour operation.
- The energy saving mode on the device may be disabled temporarily when acquiring data.

Installing

Preparing to install

.Net Framework

You need to install .NET Framework 4.7.2 on the computer before you install this software.

See the Microsoft Website for information on downloading .NET framework, installing, and explanations on usage.

<https://dotnet.microsoft.com/en-us/download/dotnet-framework/net472>

Installing for the first time and changing features



Important:

Login to the computer by using an administrator account.

Initial installation

Follow the steps below to install this software.


1. Run Setup.exe.

The Setup wizard starts.


Note:

*If the user account control screen is displayed, click **Yes** to allow installation.*


2. Click **Next**.

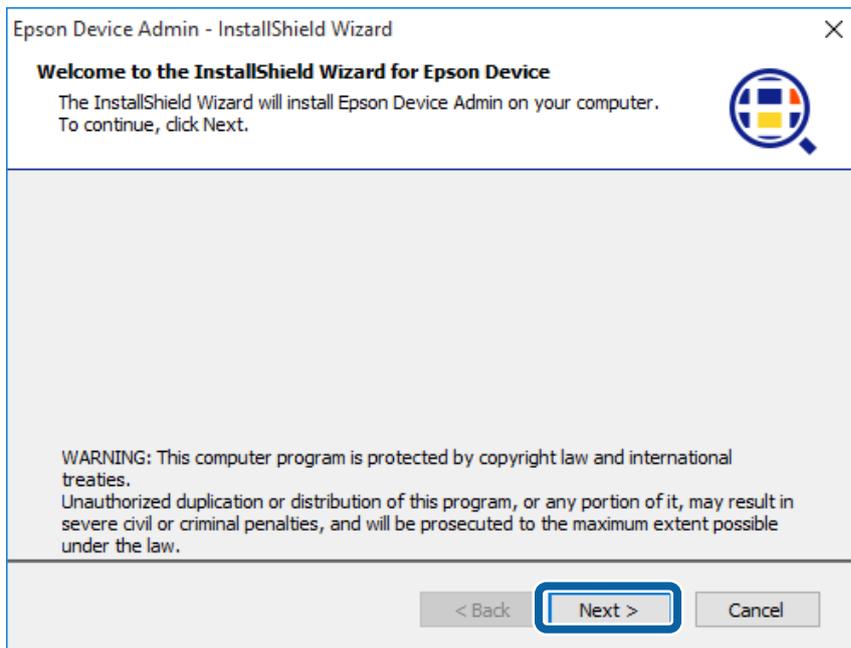

3. Check the licensing clauses, select **I accept the terms of the license agreement.**, and then click **Next**.

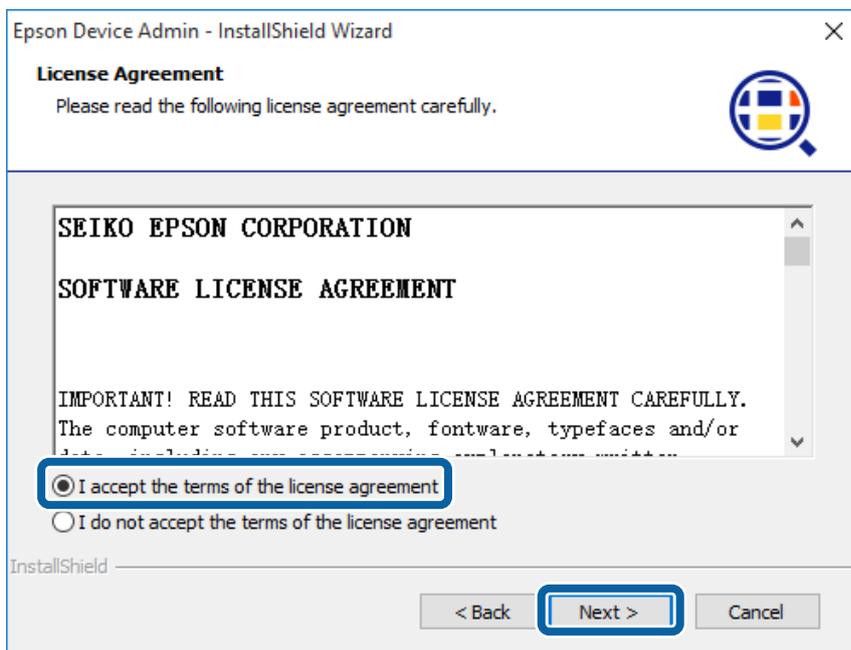

4. Select the folder where you want to install this software and then click **Next**.

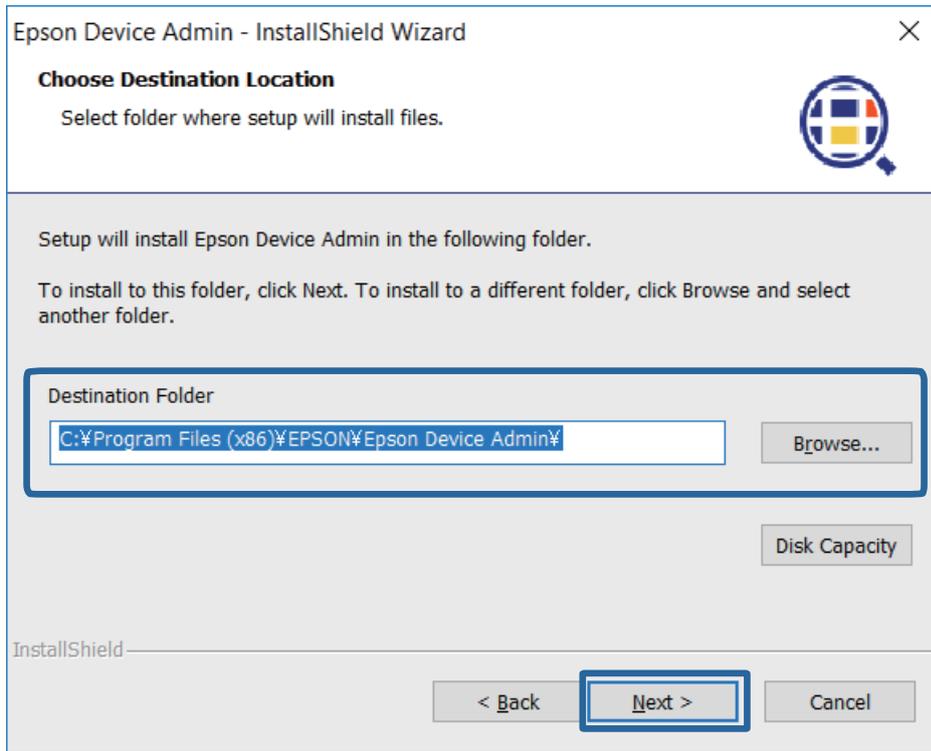


Note:

- Select **Browse** to change the destination where the software will be installed.
- Select **Disk Capacity** to check the amount of free disc space.

5. Select the features that you want to add, and then click **Next**.


You can also add the alert feature and the report feature. See the related information link below for information on additional feature.

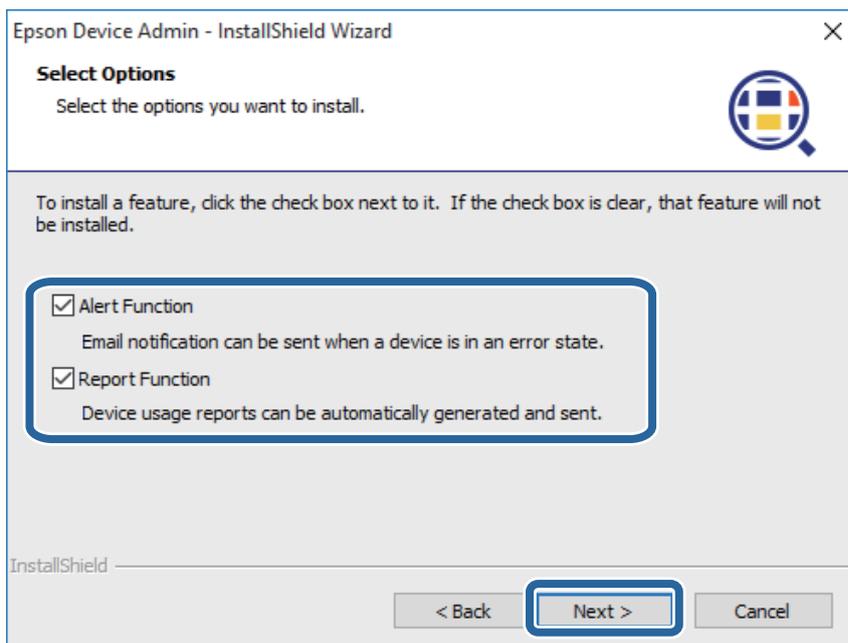

6. Make the database settings, and then click **Next**.

Select the folder where you want to install the database.

"10015" is specified as the port number. If "10015" has already been used, specify a port number that can be used on your computer.

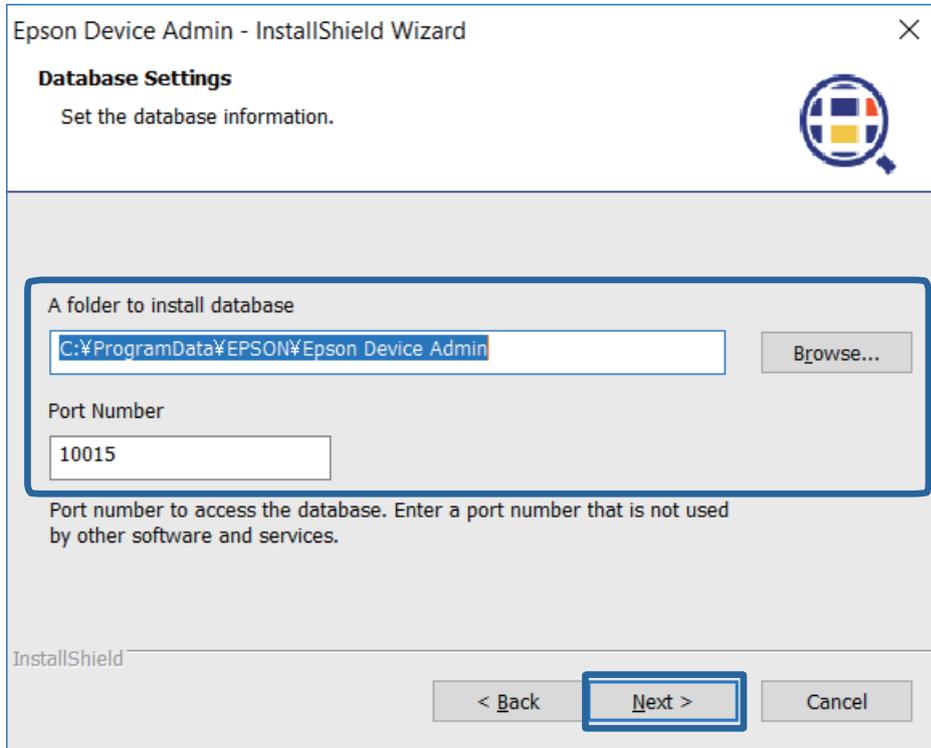


The screenshot shows the 'Epson Device Admin - InstallShield Wizard' window with the 'Database Settings' tab selected. The window title is 'Epson Device Admin - InstallShield Wizard' and it has a close button (X) in the top right corner. Below the title bar, the text 'Database Settings' is displayed, followed by the instruction 'Set the database information.' and a circular icon with a magnifying glass. The main area contains a section titled 'A folder to install database' with a text box containing the path 'C:\ProgramData\EPSON\Epson Device Admin' and a 'Browse...' button to its right. Below this is a 'Port Number' section with a text box containing '10015'. A note below the port number reads: 'Port number to access the database. Enter a port number that is not used by other software and services.' At the bottom of the window, the 'InstallShield' logo is on the left, and three buttons are on the right: '< Back', 'Next >' (which is highlighted with a blue border), and 'Cancel'.

Note:


Select **Browse** to change the destination where the database will be installed.

7. Click **Install**.

Installation starts.

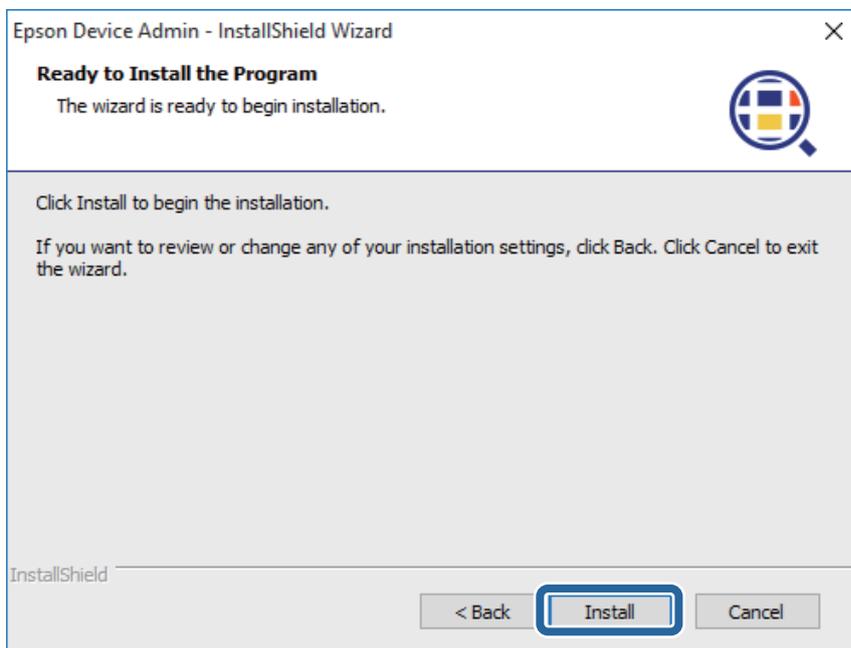

8. Click **Finish** when the installation complete screen is displayed.

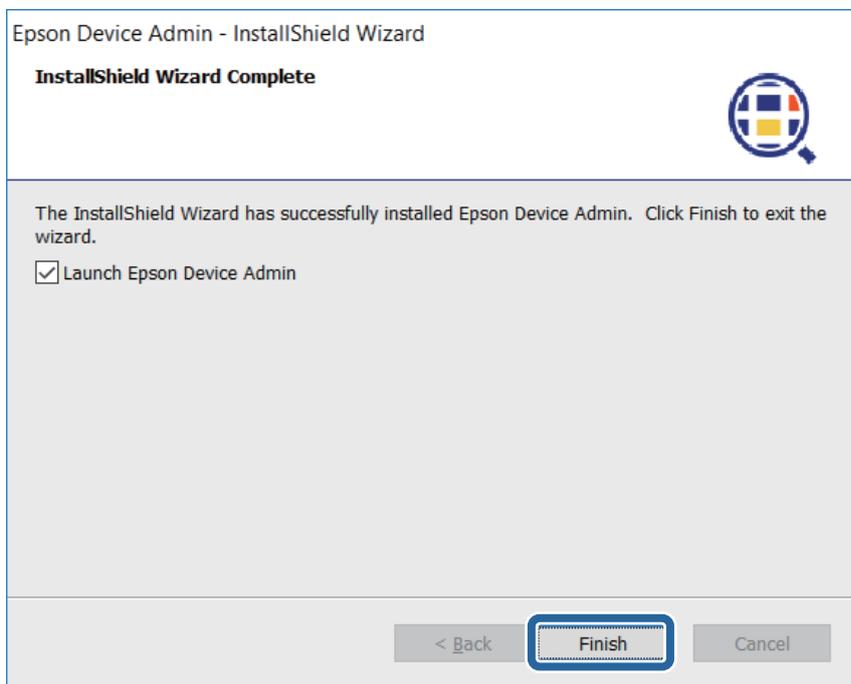

Related Information

- ➔ [“Managing Alerts” on page 95](#)
- ➔ [“Report Management” on page 101](#)

Changing features and uninstalling

You can change the installed features and uninstall this software from the Windows Control Panel.

1. Open the Windows Control Panel.
2. Select **Uninstall a program** to display the program list.
3. Right-click **Epson Device Admin**.
4. Select one of the followings from the menu displayed.
To change a function: change
To uninstall the software: uninstall
5. Follow the on-screen instructions to uninstall or change this software.

Updating

The following information and files are maintained even if you install an updated program or change the features.

- Information on acquired devices
- Settings for the discovery parameters
- Database files (From Epson Device Admin 2.x or later)

Starting up and closing Epson Device Admin

- Start up

Select Start menu > **All Programs** > **EPSON** > **Epson Device Admin**.

When you start Epson Device Admin for the first time after installing, it automatically discovers devices.


- Close

Click "x" at the top-right of the screen, or click  at the top-left of the screen, and then select **Close**.

Related Information

- ➔ [“Discovering Devices when Starting Epson Device Admin for the First Time” on page 16](#)

Top Screen

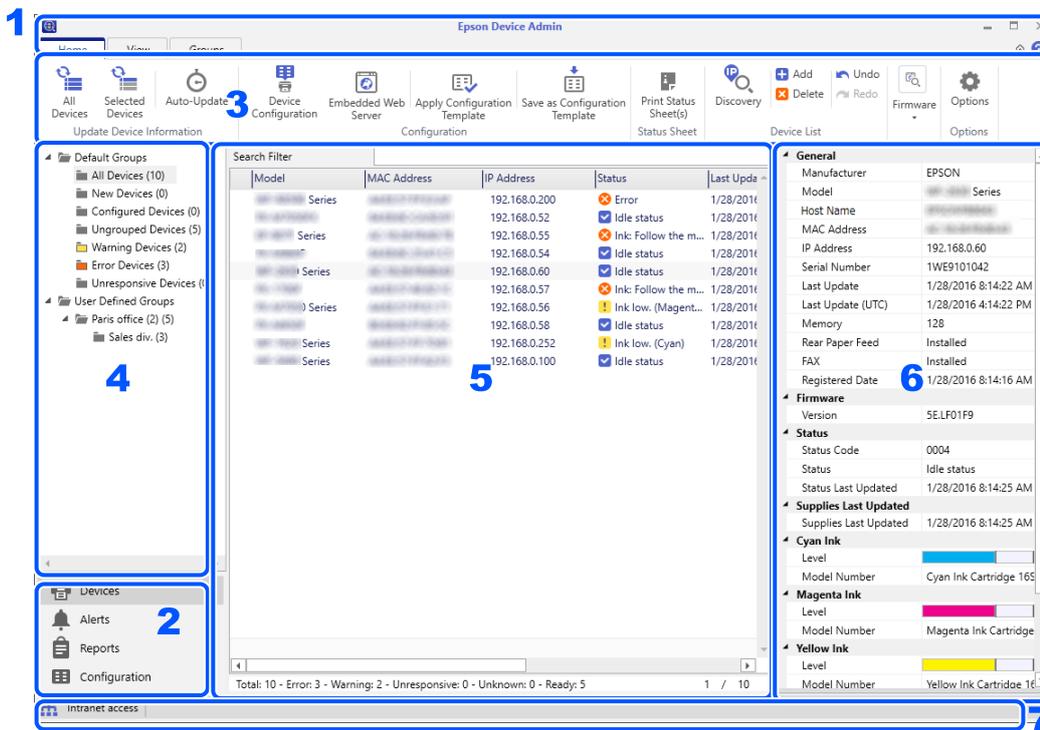

The Epson Device Admin top screen is composed of the following panes.

The display changes depending on the item selected from the side bar task menu on the top screen.

No.	Pane	Explanation
1	Title bar	Click the  to open the Help to view explanations of each item in Epson Device Admin.
2	Side bar task menu	Changes the feature being used. The screen switches depending on the item selected.
3	Ribbon menu	Displays the menu for the feature selected on the side bar task menu.
4	Side bar content	Displays the hierarchy for the feature selected on the side bar task menu.
5	Display view	Displays information and setting content depending on the feature selected in the side bar task menu or the side bar content.
6	Detailed device information	Displays details on the device selected from the Device List when you select Devices on the side bar task menu.
7	Status bar	Displays status information on the Device List when you select Devices on the side bar task menu.

Discovering Devices when Starting Epson Device Admin for the First Time

When you start Epson Device Admin for the first time after installing, a message for discovering devices is displayed.

When you click **Yes**, Epson Device Admin discovers devices in the same segment and registers devices to the device list.

When you click **No**, Epson Device Admin does not discover devices. Register them to the device list manually. See the related information link below for details.

Related Information

➔ [“Registering to the device list” on page 33](#)

System settings

You can configure Email settings and ribbon menu settings for management by using the option menu in the ribbon menu on the device management screen.


See the related information link below for details.

Related Information

➔ [“Setting Options” on page 24](#)

Operation Screen

Side bar task menus

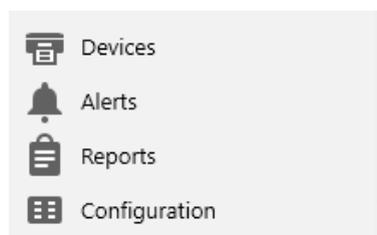

Select a menu to switch from one menu to another.

See the related information link below for details.

Device management screen

Allows you to manage devices on the network. You can discover and register devices, as well as update device information and so on.

Alert management screen

Allows you to manage alerts that are output from the device. The system can automatically inform you via email about devices with low supplies level, paper jam or device error.

Report management screen

Allows you to manage reports that contain a variety of information about the devices. You can set how to output reports containing information such as the frequency the device is used and the number of times consumables are replaced.


Configuration template management screen

Allows you to manage settings for devices with templates. You can make settings for creating, applying, and backing up setting templates.

Related Information

- ➔ [“Device management” on page 18](#)
- ➔ [“Alert management” on page 20](#)
- ➔ [“Report management” on page 21](#)
- ➔ [“Configuration template management” on page 22](#)

Device management

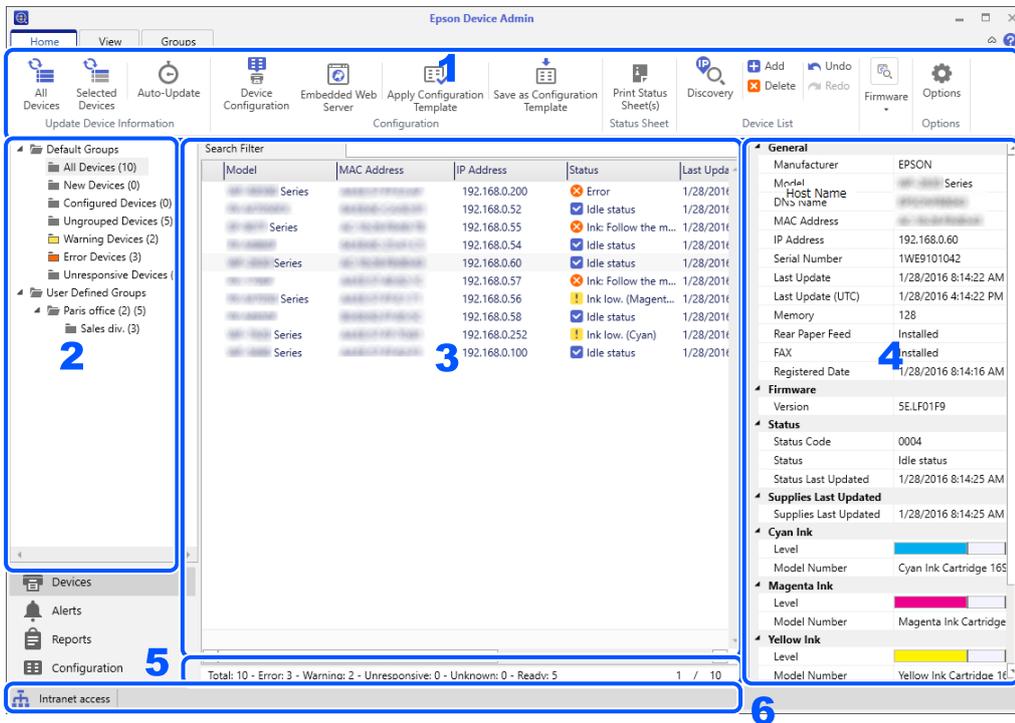

Displays the device management screen when selecting **Devices** on the side bar task menu.

The device management screen is comprised of the following panes. See the related information link below for available operations using the device management screen.


No.	Pane	Explanation
1	Ribbon menu	<p>There are three ribbons on the device management screen, and you can switch between them by clicking the tabs.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Home tab <p>Allows you to discover devices on the network, update information, change settings for the device, apply templates, and so on.</p> <input type="checkbox"/> View tab <p>Allows you to set and change information displayed on the Device List.</p> <input type="checkbox"/> Groups tab <p>Allows you to make settings to manage devices in groups.</p>

No.	Pane	Explanation
2	Tree view	<p>Displays setting groups in a folder tree formation. You can display groups that are set automatically and user defined groups. You can also display the number of the devices that belong to each group.</p> <p>The number of devices is displayed as shown below.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Groups that are set automatically <ul style="list-style-type: none"> Group name (the number of devices that belong to the group) <input type="checkbox"/> Groups defined by the user <ul style="list-style-type: none"> Group name (the number of devices that belong to the group) (the number of devices that belong to the child group*) <p>*If the same device belongs to multiple different child groups, it is counted as one device for each group. In that case, an * (asterisk) is displayed.</p>
3	Device list	<p>Displays the list of registered devices. You can check the device's information and status.</p>
4	Device detailed information screen	<p>Displays detailed information for the device selected in the Device List. The displayed items vary depending on the device. This is not displayed when multiple devices are selected.</p> <p>Supplies Last Updated is displayed in orange if it is older than the latest acquisition date.</p>
5	Summary bar	<p>Displays a summary of devices registered in the Device List with information such as the number of devices.</p>
6	Status bar	<p>Displays the network connection status and email service setting error information.</p> <p>The following status is displayed.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Internet access <ul style="list-style-type: none"> The computer is connected to the internet. <input type="checkbox"/> Intranet access <ul style="list-style-type: none"> The computer is connected to the internal network, but not connected to the internet. <input type="checkbox"/> Not connected <ul style="list-style-type: none"> The computer is not connected to the network. <p>If you are using email service settings to authenticate sending emails, the following messages will be displayed in "Internet access".</p> <ul style="list-style-type: none"> <input type="checkbox"/> Email address has expired <input type="checkbox"/> Invalid email service settings

Related Information

➔ [“Installation Settings” on page 24](#)

Alert management

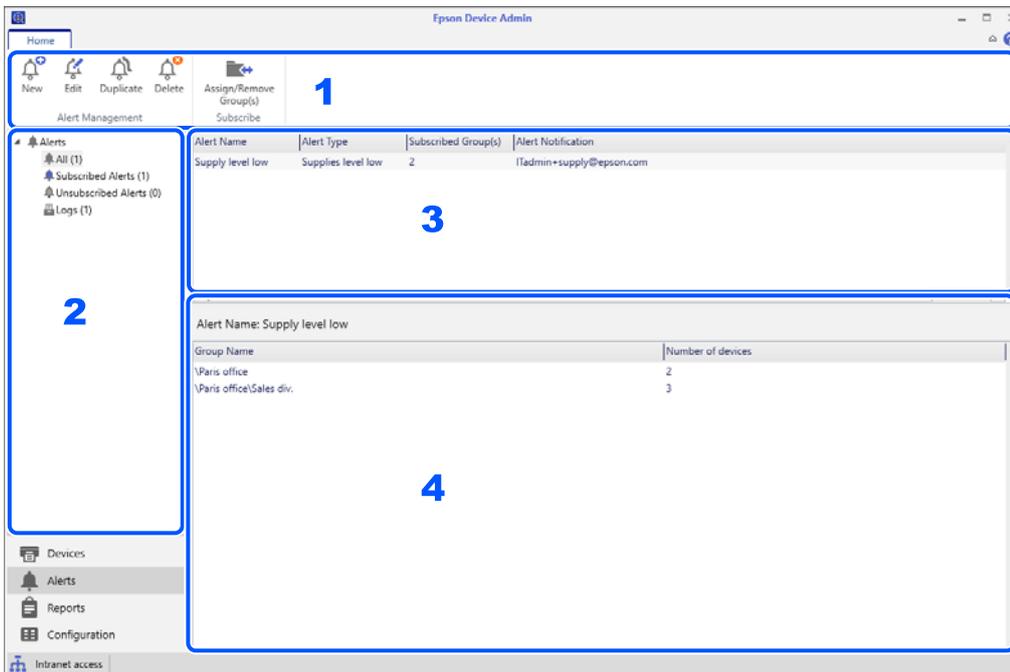

Displays the alert management screen when selecting **Alerts** on the side bar task menu.


The Alert management screen is comprised of the following panes. See the related information link below for available operations using the Alert management screen.

No.	Pane	Explanation
1	Ribbon menu	Creates alerts and manages information.
2	Tree view	Switches the display for alert template classifications.
3	Alert list	Displays the alert template list when anything except for Logs is selected in the tree view. Displays the logs list when Logs is selected in the tree view.
4	Alert group	Displays the groups subscribed to the alert templates selected in the alert template list. Displays log details when Logs is selected in the tree view.

Related Information

➔ [“Managing Alerts” on page 95](#)

Report management

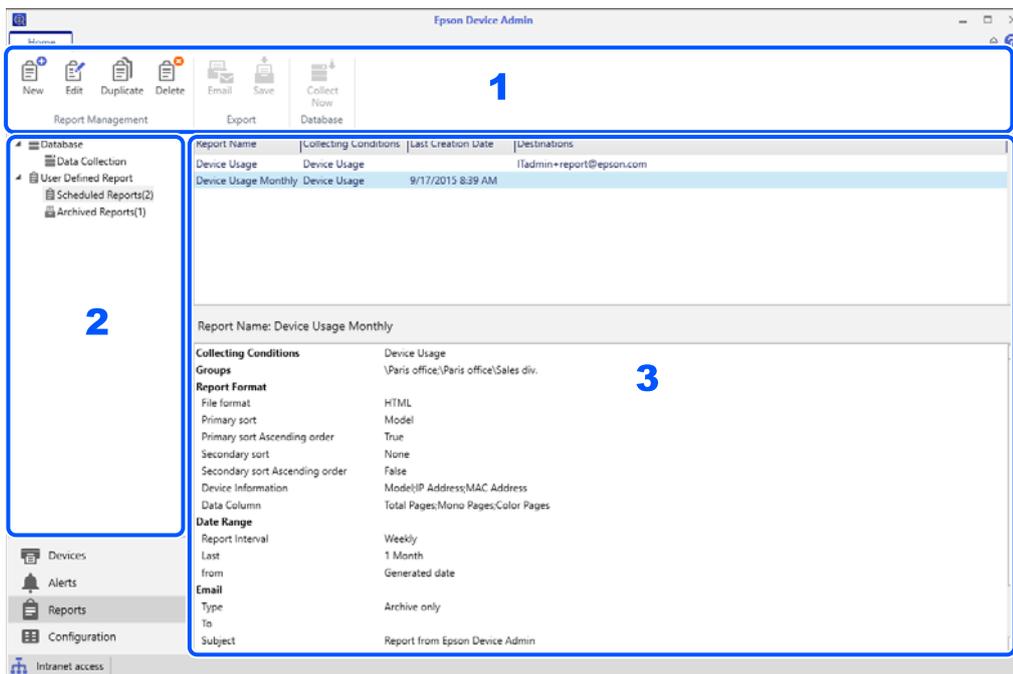

Displays the report management screen when selecting **Reports** on the side bar task menu.

The Report management screen is comprised of the following panes. See the related information link below for available operations using the Report management screen.


No.	Pane	Explanation
1	Ribbon menu	<p>Switches the ribbon menu according to the tree view selected on the report management screen.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Database > Data Collection Menus for data collection. <input type="checkbox"/> User Defined Report > Scheduled Reports Menus for creating reports and formatting. <input type="checkbox"/> User Defined Report > Archived Reports Menus for report files.
2	Tree view	<p>Displays data collection and report management trees. The ribbon menu and display view are switched depending on the selected item.</p>

No.	Pane	Explanation
3	Display view	<p>Displays the following depending on the item selected in the tree view.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Database > Data Collection Top area: List of data collection conditions Bottom area: List of devices <input type="checkbox"/> User Defined Report > Scheduled Reports Top area: List of report schedules Bottom area: Details about the selected schedule <input type="checkbox"/> User Defined Report > Archived Reports Top area: List of archive reports Bottom area: Content of the selected archive report

Related Information

➔ [“Report Management” on page 101](#)

Configuration template management

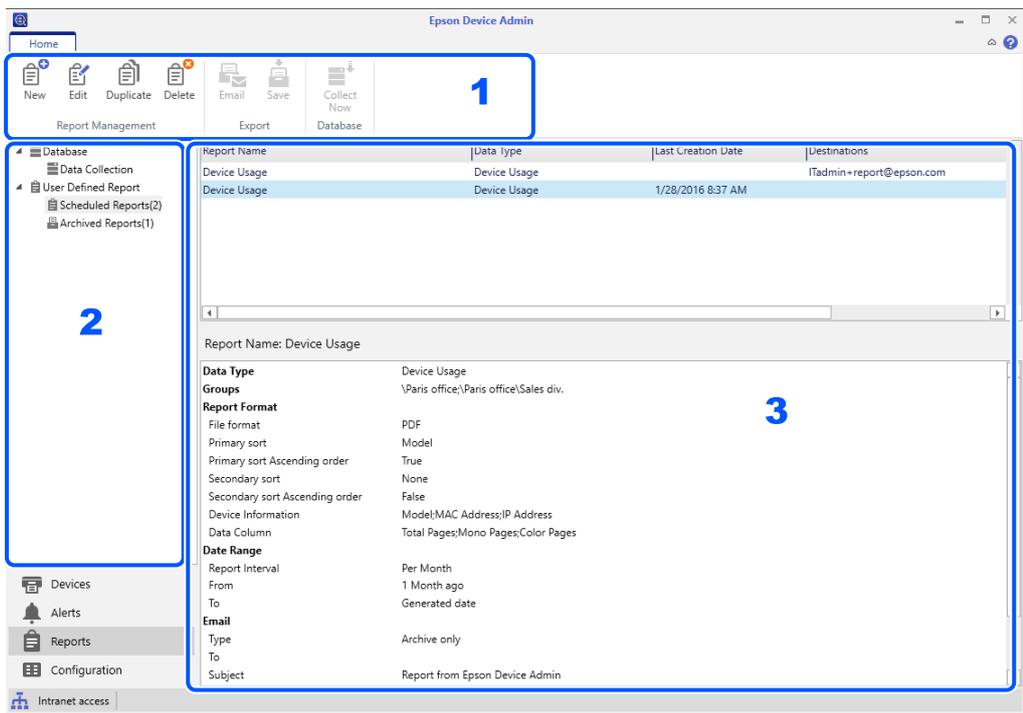

Displays the configuration template management screen when you select **Configuration** on the side bar task menu.

The configuration template management screen is comprised of the following panes. See the related information link below for available operations using the configuration template management screen.

NO.	Pane	Explanation
1	Ribbon menu	Manages configuration templates.

NO.	Pane	Explanation
2	Tree view	Displays configuration templates in a folder tree formation. Switches display views depending on the selected item.
3	Display view	Displays the following depending on the item selected in tree view. <input type="checkbox"/> Configuration > Templates Top area: List of configuration templates Bottom area: Content of the selected configuration template <input type="checkbox"/> Configuration > Logs Top area: List of logs Bottom area: Content of the selected log

Related Information

➡ [“Settings Template” on page 51](#)

Installation Settings

Setting Options

These settings are necessary to use each feature.

See the related information link below for details.

Device Registration

- Discovery Parameters: Discovery using an IP address
- Discovery Parameters: Discovery using an IP address range
- Discovery Parameters: Discovery using a network address

System Settings

- Email notification settings
- Processing Time
- Password Manager
- System settings

Detailed Settings

- Firmware external site access
- Detailed Settings

Alert Notifications

- Alert


Related Information

- ➔ [“Specifying an IP address” on page 35](#)
- ➔ [“Specifying an IP address range” on page 36](#)
- ➔ [“Specifying a network address” on page 36](#)
- ➔ [“Mail” on page 26](#)
- ➔ [“Schedule settings” on page 90](#)
- ➔ [“Managing passwords automatically” on page 65](#)
- ➔ [“Backing up system settings” on page 128](#)
- ➔ [“Check for updates” on page 33](#)
- ➔ [“Formats” on page 30](#)
- ➔ [“Setting the alert confirmation interval” on page 98](#)


Options screen

You can set discovery conditions as well as system settings on the **Options** screen.


1. Select **Devices** on the side bar task menu.

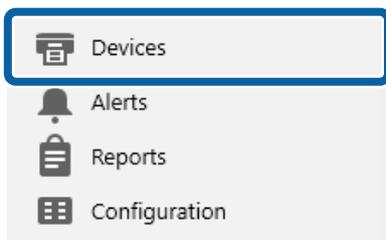

2. Select **Home > Options** on the ribbon menu.

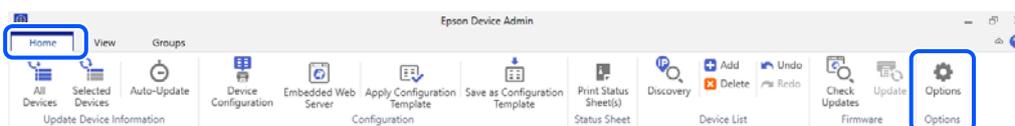


3. Select the item you want to configure.
4. Set each item as necessary.

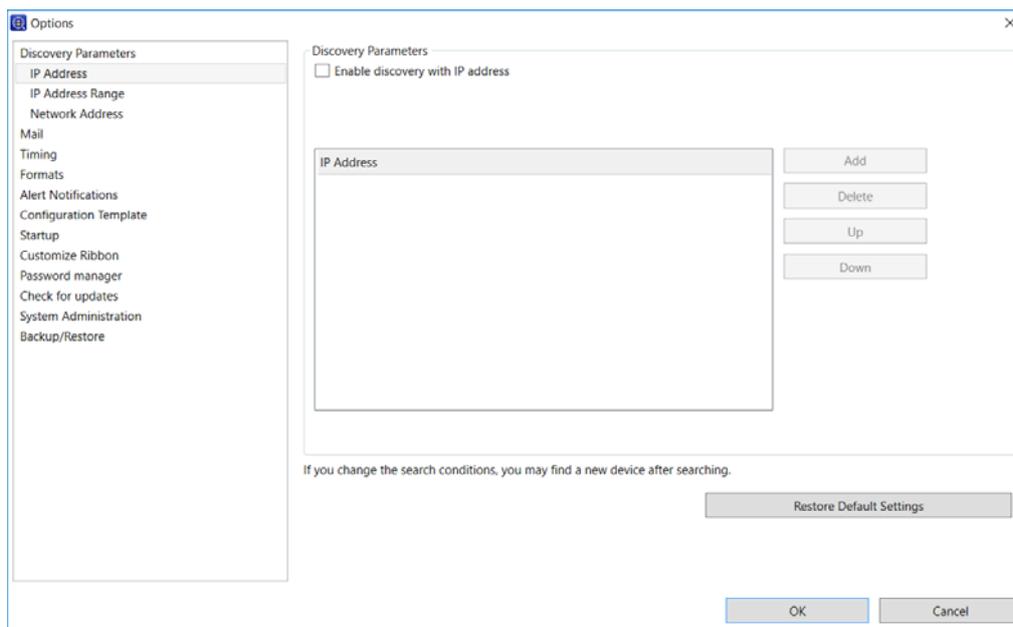

5. Click **OK**.

Mail

Set the email server (email sending server) or email service used for notifications.

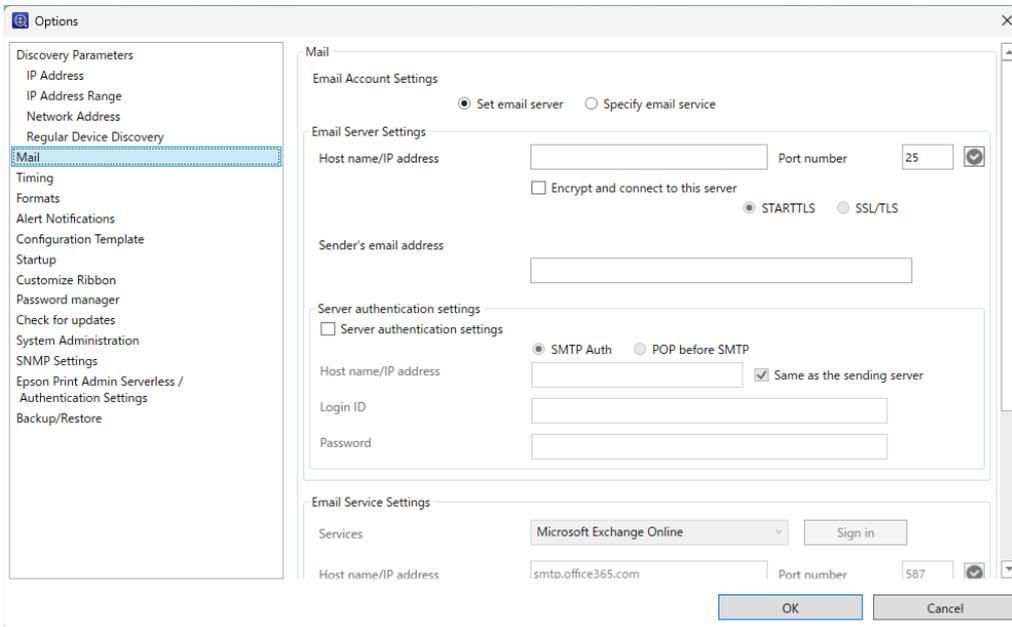

Email Account Settings

Select whether to use an email server or specify an email service for sending emails.

If you want to use OAuth 2.0 authentication, select **Specify email service**. When you select **Specify email service**, the encryption method is automatically set to STARTTLS and the port number is set to 587.

Item	Explanation
Email Server Settings	Set this if you select Set email server in Email Account Settings .

Item	Explanation
Host name/IP address	<p>Enter the host name or IP address for the SMTP server.</p> <p>Enter the host name within 255 characters using A to Z, a to z, 0 to 9, hyphens (-), and underscores (_). The label should be within 63 characters.</p> <p>Enter the IP address in IPv4 format using numbers and periods (.).</p>
Port Number	Enter the port number for the SMTP server from 1 to 65535.
	<p>Check the connection with the SMTP server.</p> <p>Blue: Successfully connected to the server. Go to the next step.</p> <p>Red: Failed to connect to the server.</p> <p>If the software fails to connect to the server, check that all settings have been made correctly.</p>
Encrypt and connect to this server	<p>Select this to encrypt the connection to the SMTP server.</p> <p>Select the encryption method from STARTTLS or SSL/TLS.</p>
Sender's email address	<p>This is the email address displayed in the email header sent from the system.</p> <p>Enter up to 256 characters.</p>
Server Authentication Settings	<p>Select this if the server requires authentication to send emails.</p> <p>Select the authentication method from SMTP Auth (SMTP authentication) or POP before SMTP.</p>
Host name/IP address	<p>Enter the host name or IP address for the authentication server when the authentication method is POP before SMTP.</p> <p>The entered text is the same as the host name and IP address for the SMTP server.</p> <p>When this is the same as the authentication for the SMTP server, select Same as the sending server.</p>
Login ID	<p>Enter the login ID for the SMTP server.</p> <p><input type="checkbox"/> Input characters: ASCII characters, up to 255 characters</p> <p><input type="checkbox"/> Input format: User name@Domain name (for example, username@example.com)</p>
Password	Enter the password for the SMTP server using up to 255 ASCII characters.
Email Service Settings	<p>Set this if you select Specify email service in Email Account Settings.</p> <p> Important:</p> <p><i>Specify one of the following to send emails using Specify email service in an environment where proxy settings are required and a user is logged out from a computer.</i></p> <p><input type="checkbox"/> <i>In Windows, set up the WinHTTP proxy.</i></p> <p><input type="checkbox"/> <i>In Epson Device Admin, select Manual proxy configuration from Proxy Server Settings on the System Administration screen to set up the proxy.</i></p>

Item	Explanation
Services	<p>Select the email service you want to use.</p> <p>When you select a service, the host name or IP address and port number to be used are automatically filled in.</p>
Sign in/Sign out button	<p>When you click Sign in to start signing in to an email service, follow the on-screen instructions.</p> <p>When you sign in successfully, the button changes from Sign in to Sign out, and information is displayed in the Sender's email address and Sign-in expiration period fields.</p>
Host name/IP address	<p>Enter the host name or IP address for the email service.</p> <p>Enter the host name within 255 characters using a to z, 0 to 9, hyphens (-), and underscores (_). Each label should be within 63 characters.</p> <p>Enter the IP address in IPv4 format using numbers and periods (.).</p>
Port number	<p>Enter the port number for the email service from 1 to 65535.</p>
	<p>Check the connection with the email service.</p> <p>Blue: Successfully connected to the email service.</p> <p>Red: Failed to connect to the email service.</p> <p>If the software fails to connect to the email service, check that all settings have been made correctly.</p>
Sender's email address	<p>Displays the email address that was authenticated using OAuth 2.0.</p>
Sign-in expiration period	<p>Displays the sign-in expiration period.</p> <p>When you send an email, this period is automatically extended.</p> <p>If the period has expired, click Sign in to sign in to the email service.</p>

Maximum attachment size

Sets the maximum file size that can be attached to an email.


Send Test Message button

Check whether or not the test email can be sent to the receiver's email address.

This button is available after entering the host name/IP address, port number, and sender's email address. The test email uses the title "Epson Device Admin" and the body text "Success. Email settings are correctly configured." in English, regardless of the language settings.

Timing


Set timing of data collection and logs retention period.

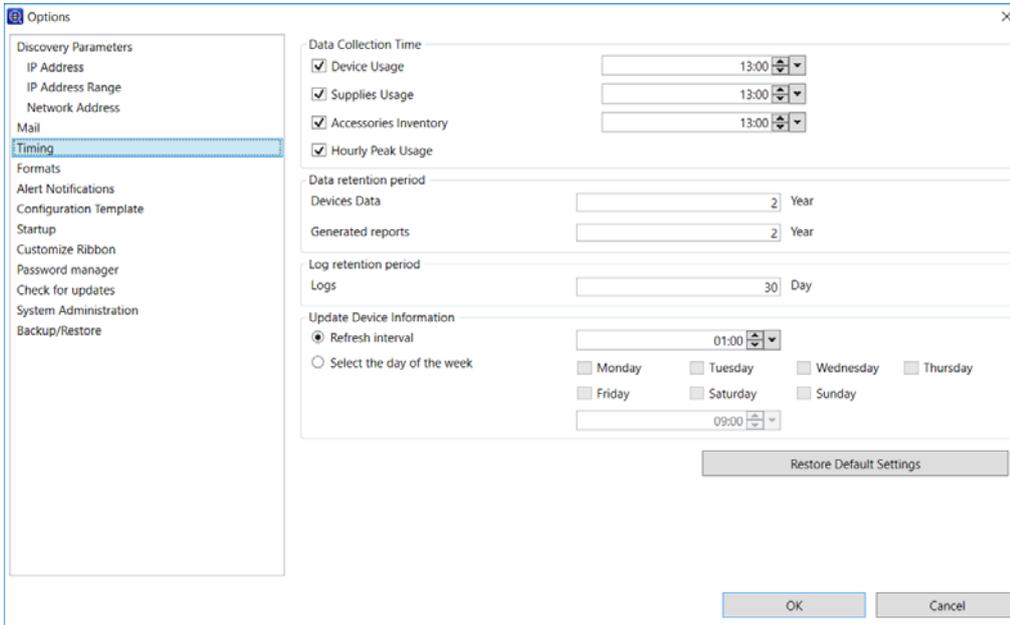

Item	Explanation
Update Device Information	Sets the schedule to collect information about the devices using Auto-Update on the Device management screen.
Refresh interval	Collects device information at set intervals. You can set the interval time from 1 minute to 23 hours and 59 minutes in intervals of 1 minute.
Select the day(s) of the week	Collects device information on the selected day and time. You can specify the time in intervals of 1 minute.

Formats

Set the data delimiters, paper size, and units for the report.

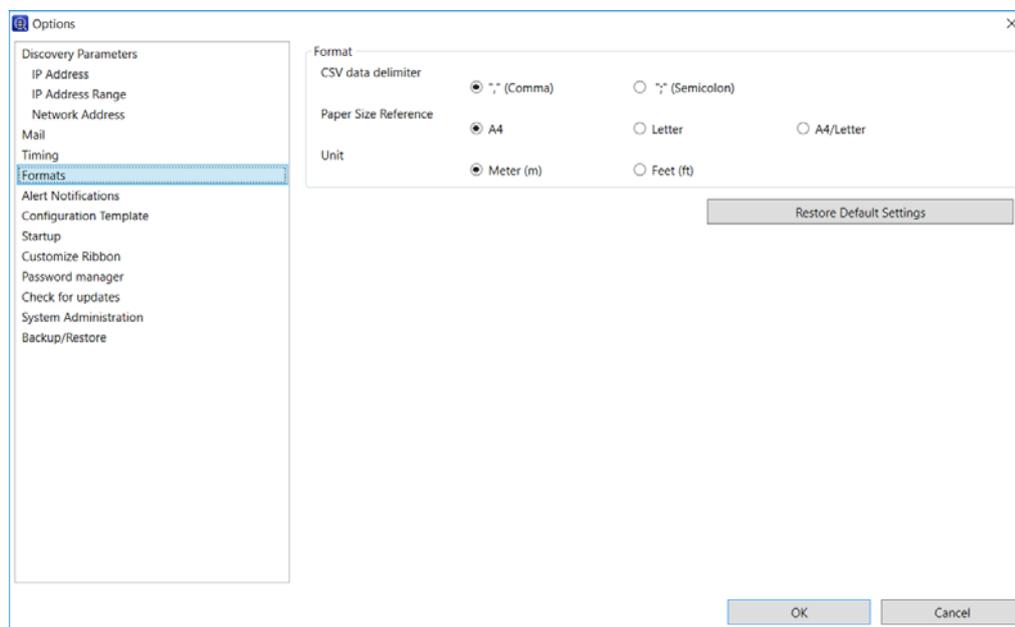


Item	Explanation
CSV data delimiter	Specifies data delimiters for CSV files when saving reports, archive reports, and so on. The default value is ",". See the related information link below for details.
Paper Size Reference	Displays the paper size selected in this software. The default value is A4.
Unit	Displays the units selected in this software. The default value is Meter (m).

Related Information

➔ [“Report Management” on page 101](#)

Startup

Sets whether or not to collect device information when you start this software.

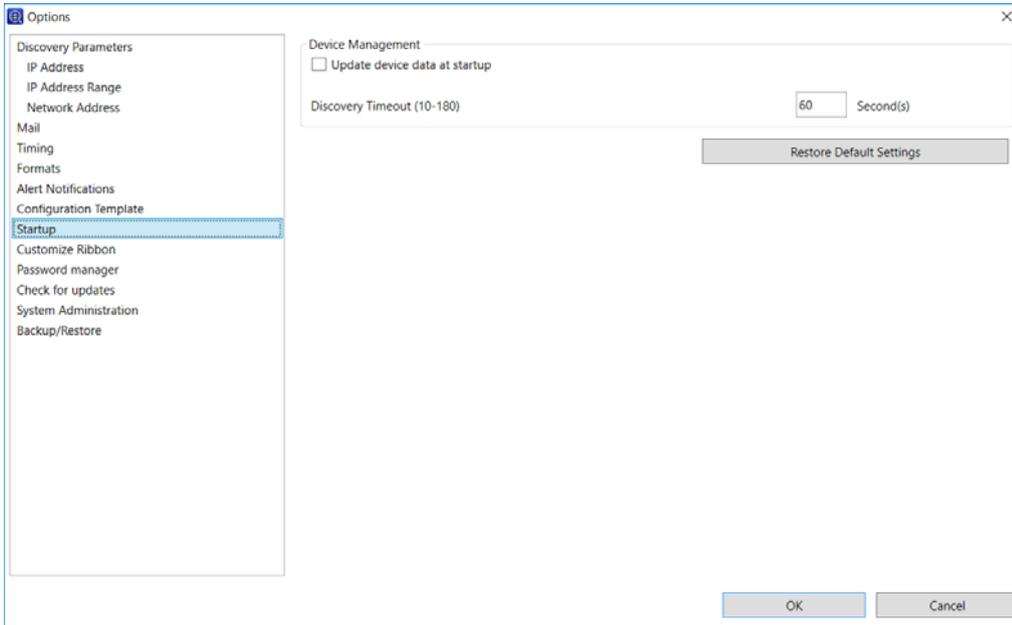


Item	Explanation
Update device data at startup	Sets whether or not to collect all device information when you start this software. See the related information link below for details.
Discovering and rebooting timeout (10-180)	Specifies the timeout time between the discovery and the reboot confirmation. You can specify 10 to 180 seconds in intervals of 1 second. The default is 60. See the related information link below for details.

Related Information

- ➔ [“Updating Device Information” on page 38](#)
- ➔ [“Discovery condition settings” on page 35](#)

Customize Ribbon

Set the ribbon menu display.

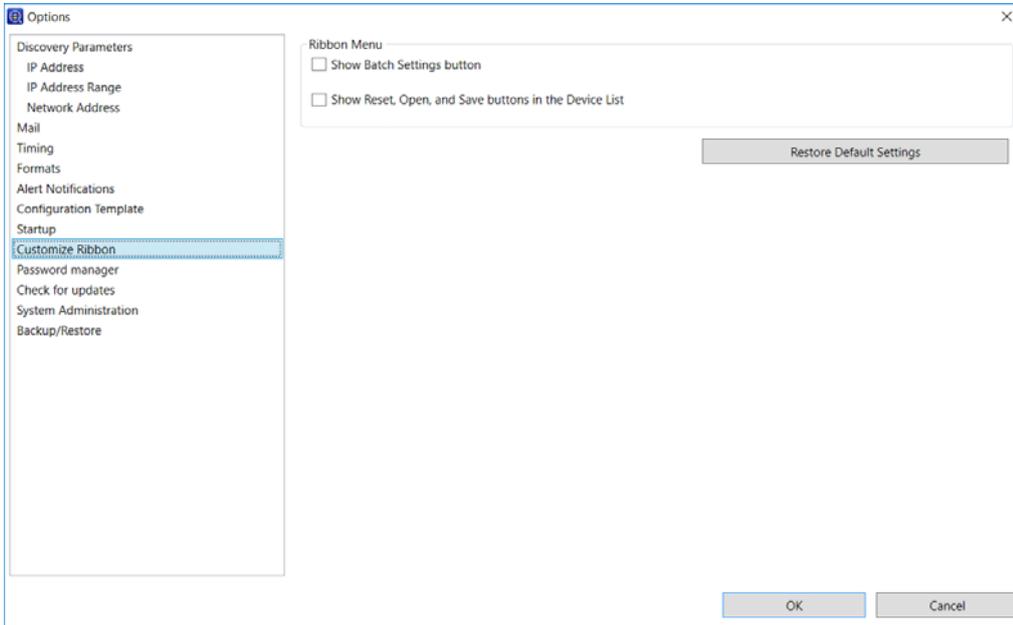


Item	Explanation
Show Batch Settings button	When this is selected, the Batch Settings button is displayed on the Home tab - Configuration group on the ribbon menu for the Device Management screen. See the related information link below for details.
Show Reset, Open, and Save buttons in the Device List	When this is selected, the Reset , Open , and Save buttons are displayed on the Home tab - Device List group on the ribbon menu for the Device Management screen. See the related information link below for details.

Related Information

- ➔ [“Batch Settings” on page 149](#)
- ➔ [“Device list” on page 130](#)

Check for updates

Allows the software to access external sites to update this software or check and obtain firmware updates.

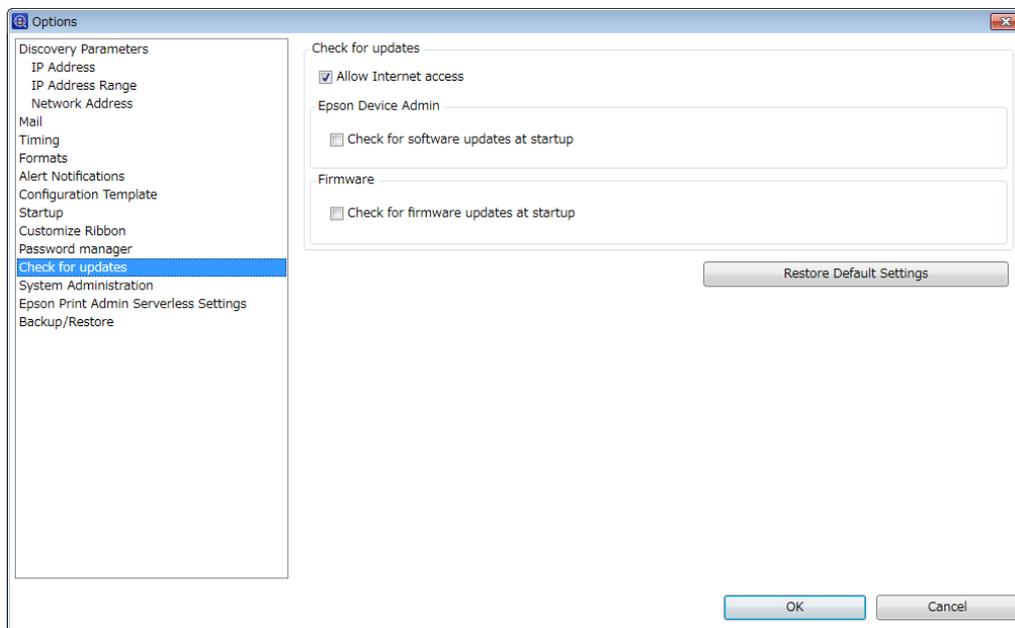

Item	Explanation
Allow Internet access	Connects to the Internet and accesses external sites.
Check for software updates at startup	Checks for updates for this software at startup.
Check for firmware updates at startup	Checks for updates for the firmware at startup.

Registering to the device list

Registers devices managed on the network to the device list.

You can use the following registration methods. Use the method that best suits your daily operation needs.

See the related information link below for details.

Discover and register devices


Discover devices on the network and register them to the software. You can discover using conditions such as beyond segment and specify network range.

Specify individually and register

Specify the IP address and device ID and register it to the software. You can register specific devices or devices that were not found during a discovery.

❑ Register from a device list file

Load a device information file containing the device list and register them to the software. This is useful when restoring or migrating a system.

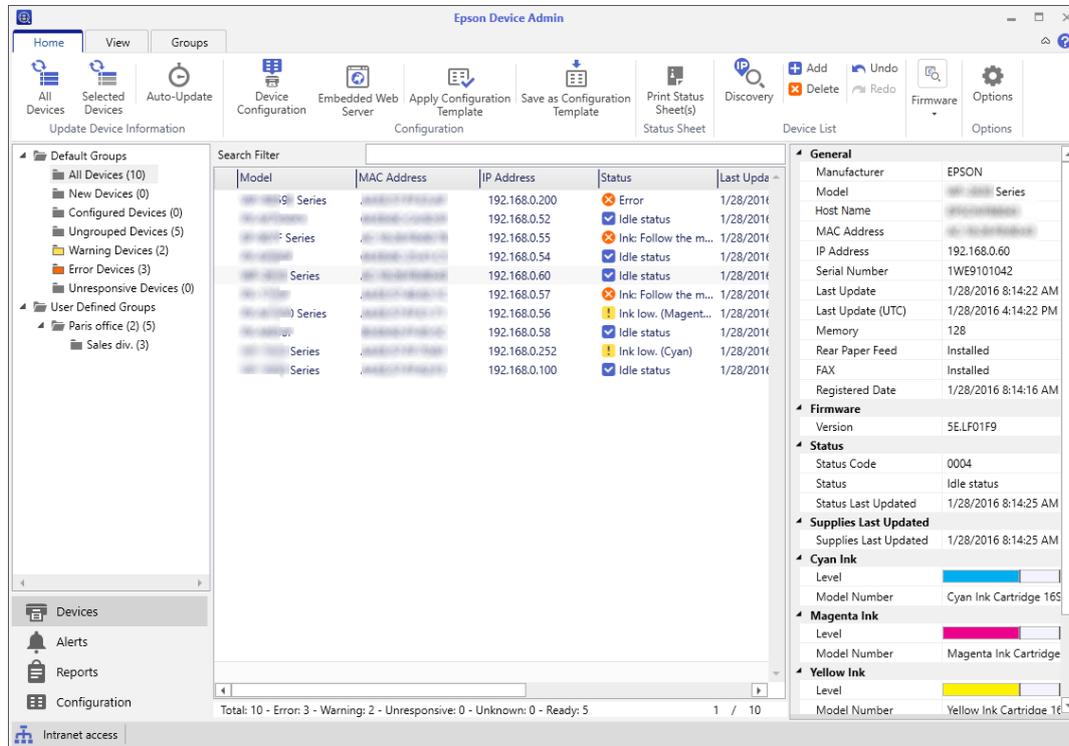

Related Information

- ➔ [“Discovering devices” on page 34](#)
- ➔ [“Specifying individual devices” on page 37](#)
- ➔ [“Backing up and Restoring” on page 127](#)

Discovering devices

Discover devices on the network and register the discovered devices to the device list. Epson Device Admin does not only discover devices in the same segment, but it can also discover devices outside the segment and in the network range that you specified.

You can also use **Regular Device Discovery** to discover devices on a set schedule.

When you start Epson Device Admin, it automatically discovers devices in the same segment and registers Epson devices to the device list.

Note:

Click the  icon next to the progress bar to stop discovering.

Discovering by using the discovery button

This discovers using the conditions set on the device management screen.

1. Select **Devices** on the side bar task menu.

2. Click **Options** on the ribbon menu
3. Set the appropriate conditions for the device you are discovering.
See the related information link below for details.
4. Click **OK** when you have finished setting the conditions.
5. Click **Discovery**.

The software starts discovering and registers located devices to the device list.

When you click **Device List** > **Save** on the ribbon menu, you can save the displayed device list to a file. However, group information is not saved.

See the related information link below for details.

Note:

When the software is connected to a network, it discovers for Epson devices even if no IP addresses have been assigned.

Related Information

- ➔ [“Discovery condition settings” on page 35](#)
- ➔ [“Backing up and Restoring” on page 127](#)

Discovery condition settings

Sets the conditions for discovering. You can discover by specifying IP addresses, an IP address range, and network addresses. You can discover when an IP address is assigned to a device. See the following for details.

Note:

- All enabled discovery conditions are performed in parallel.
- Epson devices in the same segment as Epson Device Admin can be discovered for regardless of the discovery conditions.
- Set the timeout for discovering from **Options** > **Startup** > **Devices** > **Discovering and rebooting timeout (10-180)**

Specifying an IP address

Discovers for the specified IP address for the device using unicast.

Item	Explanation
Enable discovery with IP address	Select to enable this discovery condition.
Add	Displays the screen where you can add an IP address Enter the IP address for the device you want to discover in IPv4 format. You can register up to 100 IP addresses.
Delete	Deletes the selected IP address from the IP address list.
Up, Down	Moves the IP address up or down in the IP address list. The discovery is performed in the order of the addresses in the IP address list.
Restore Default Settings	Click this to clear the IP address list and disable discovering using IP addresses.

Specifying an IP address range

Discovers the specified IP address range for the device using unicast. You can perform this discovery when an IP address is assigned to the device.

Item	Explanation
Enable discovery with an IP address range	Select to enable this discovery condition. Discovers devices within the selected IP address range.
Add	Displays the screen where you can set an IP address range. Enter the start and end IP addresses for the range you want to discover in IPv4 format. You can register up to 1000 IP address ranges. You can register up to 65535 hosts in each IP address range.
Change	Changes the IP address range specified for the device selected in the discovery range.
Delete	Deletes the IP address range specified for the device selected in the discovery range.
Export	Saves the IP address search range list in CSV file format. Click to display the dialog for specifying the save destination.
Import	Imports the IP address search range list in CSV file format. Click to display the file selection dialog.
Restore Default Settings	Click this to clear the discovery range and disable discovering using a range of IP addresses.

Specifying a network address

Discovers a device in the specified network address using multicast.

Item	Explanation
Enable discovery with multicast	Select this to send data to the specified network using port number 427 and multicast to discover a device. You need a router environment that supports IP multicast. If the router in the installation environment does not support IP multicast, device discovery by network address is not possible. Search using the IP address range specification setting.
Enable discovery over network segments	Select this to discover devices on networks beyond your router. Sends data to the specified network using port number 3289 and broadcast to discover a device. When sending using multicast, you can set the network range to be discovered in Multicast TTL (1-15) .
Add	Displays the screen where you can specify a network address. Enter a network address and subnet mask in the subnet in IPv4 format. When the entered network address is the host address, it is automatically corrected and registered to the discovery address list. You can register up to 20 network addresses.
Delete	Deletes the selected network address and subnet mask from the discovery address list.

Item	Explanation
Multicast TTL (1-15)	<p>Sets the network range to be searched when sending by multicast. When set to "1", the router is not passed through. When set to "2" or higher, the network range specified in Network to discover is discovered.</p> <p>For the setting value of TTL, check with the network administrator of the installation environment and set an appropriate value. If you set an inappropriate value, you may not be able to search for devices.</p>
Restore Default Settings	Click this to clear the discovery range and disable discovering using a range of IP addresses.

Regular device discovery

Periodically discover devices according to the set schedule. If you specify a search condition such as "specify IP address", So search regularly.

Note:

- When **Regular Device Discovery** is enabled, the **Auto-Update** function of device information is disabled.
- When device discovery is performed manually, **Regular Device Discovery** is not performed. It skips to the next scheduled event.
- Regular Device Discovery** continues to run in the background even if you close the *Epson Device Admin*.


Item	Explanation
Enable Regular Device Discovery	Select to enable Regular Device Discovery .
Schedule Settings	<p>Day of Week: Run device discovery at the specified time on the specified day of the week.</p> <p>The day of the week can be specified from Monday to Sunday, and the time can be specified in 1-minute increments.</p>
How to add rediscovered device information	Select an addition method from "Do not add", "Re-add", and "Add after deleting past data".
Restore Default Settings button	Click to clear Regular Device Discovery settings.

Specifying individual devices

You can register devices that were not found using the discovery feature, or devices that were not made by Epson.

1. Select **Devices** on the side bar task menu.
2. Click **Device List > Add** on the ribbon menu.
3. Select a method to classify the device.
 Select **IP Address** when the device has a static IP address.

Select **Host Name** when the IP address for the device is set automatically.

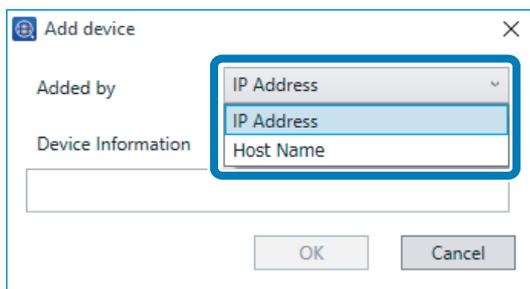

4. Enter the device information.

Enter the IP address in IPv4 format when you select **IP Address** as the method.

Enter the device name on the network when you select **Host Name** as the method.

5. Click **OK**.

When communication is successful, the device is registered to the device list.

If it is not registered, make sure the IP address and host name are correct.

Updating Device Information

You can update detailed information about the status of devices registered in the device list and the status of consumables. The ribbon menu is unavailable when device information is being acquired.

1. Select **Devices** on the side bar task menu.
2. Click **Update Device Information > All Devices** on the ribbon menu.

When updating data individually, select the device from the device list, and then click **Update Device Information > Selected devices**.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

You can update device information automatically.

- Update when starting Epson Device Admin

Select **Options > Startup > Device Management > Update device data at startup**.

- Update regularly by using a timer

You can update data regularly by setting a schedule. See the related information link below for details.

Note:

When **Regular Device Discovery** is enabled, the **Auto-Update** function of device information is disabled.

Related Information

➔ [“Collecting information regularly” on page 90](#)

Group Management

You can manage devices registered to the device list as separate groups. The groups are displayed in the tree view when you select **Devices** on the side bar task menu.

You can create groups for specific purposes, such as the location devices are installed, organization names, different features of the printer or scanner, available paper sizes, and then manage the devices as groups.

You can use the following methods to register devices to a group.

- Assign automatically using set conditions

Discovered devices are assigned automatically using set conditions.

- Select devices

Select devices and register them to a group. You can create a group from the selected devices.

Create and edit user-defined groups

You can manage devices as a group by creating optional groups such as for the office and department of the device.

Create an automatic assignment group

Devices discovered through a search are automatically assigned to a group. Follow the steps below to set the conditions for assigning groups.

Note:

You can create up to 2,000 groups. There is no limit for groups in the same layer.


1. Select **Devices** on the side bar task menu.
2. Click the **Groups** tab on the ribbon menu.
3. Click **New**.



4. Select the group name to use as the parent from **Parent group**.


When creating a new group, layers are created by assigning the **User Defined Groups** as the parent group.

You can create up to eight layers of groups.

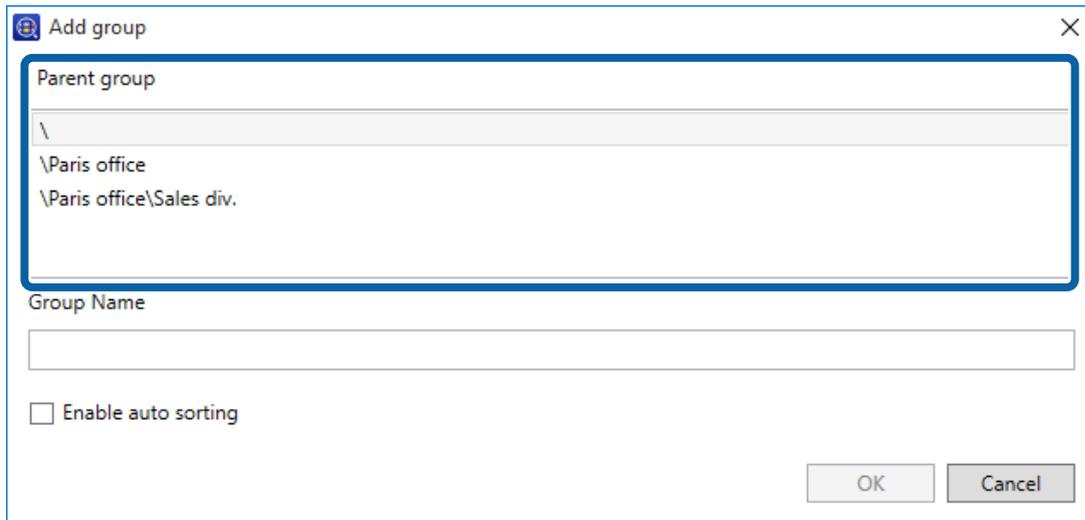

5. Enter the new group name in **Group Name**.

Enter up to 256 characters in Unicode for the group name. You cannot use \ or ;.

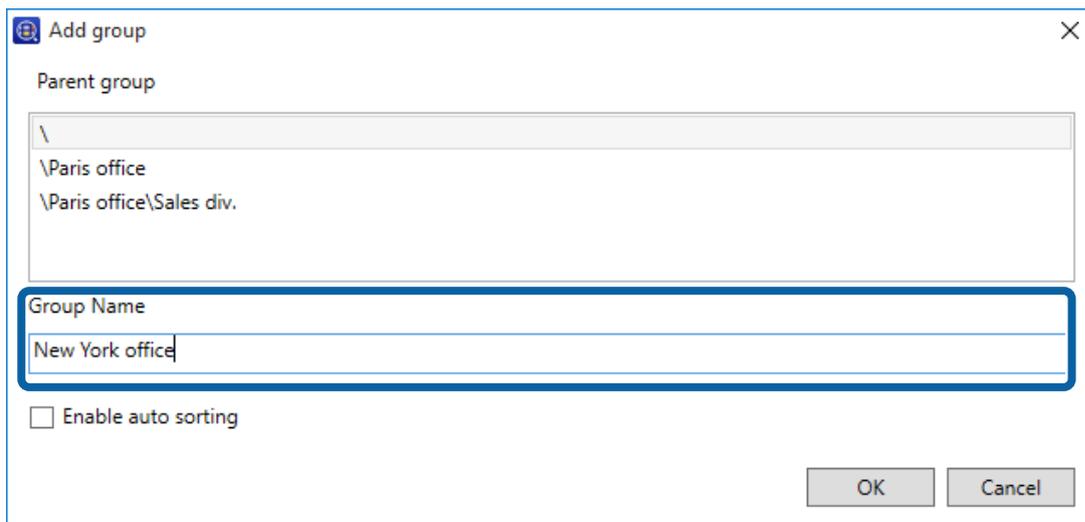

6. Click **Enable auto filter**.

7. Click **Add**.

The setting screen for automatically assigning groups is displayed.

8. Set the auto assignment conditions.

You can register up to 20 conditions.


See the following to make the settings.

Item	Explanation
Device information	Items in the device list column. Select the following from the pull-down menu. <ul style="list-style-type: none"> <input type="checkbox"/> Model <input type="checkbox"/> IP Address <input type="checkbox"/> Department <input type="checkbox"/> Location <input type="checkbox"/> Remark <input type="checkbox"/> Note <input type="checkbox"/> Groups <input type="checkbox"/> Connection <input type="checkbox"/> Manufacturer

Item	Explanation
Conditions	<p>Select conditions for the target items.</p> <ul style="list-style-type: none"> <input type="checkbox"/> When Device Information is set to IP Address: <ul style="list-style-type: none"> Greater than or equal to less than or equal to Greater than less than Equal to Not equal to Start with <input type="checkbox"/> When Device Information is set to Model, Department, Location, Remark or Note: <ul style="list-style-type: none"> Equal to Not equal to Include Not include Start with End with <input type="checkbox"/> When Device Information is set to Groups: <ul style="list-style-type: none"> Belong Not Belong <input type="checkbox"/> When Device Information is set to Connection: <ul style="list-style-type: none"> Equal to Not equal to
Value	<p>When Device Information is set to IP Address, enter the IP address.</p> <p>When Device Information is set to Connection, select Network.</p> <p>For other situations, enter up to 256 characters in Unicode.</p>
Operation	<p>Selects the relationship to the last condition. The conditions are applied in order from the top of the auto sorting conditions.</p>

9. Click **OK**.

The automatic assignment condition is added in the list.

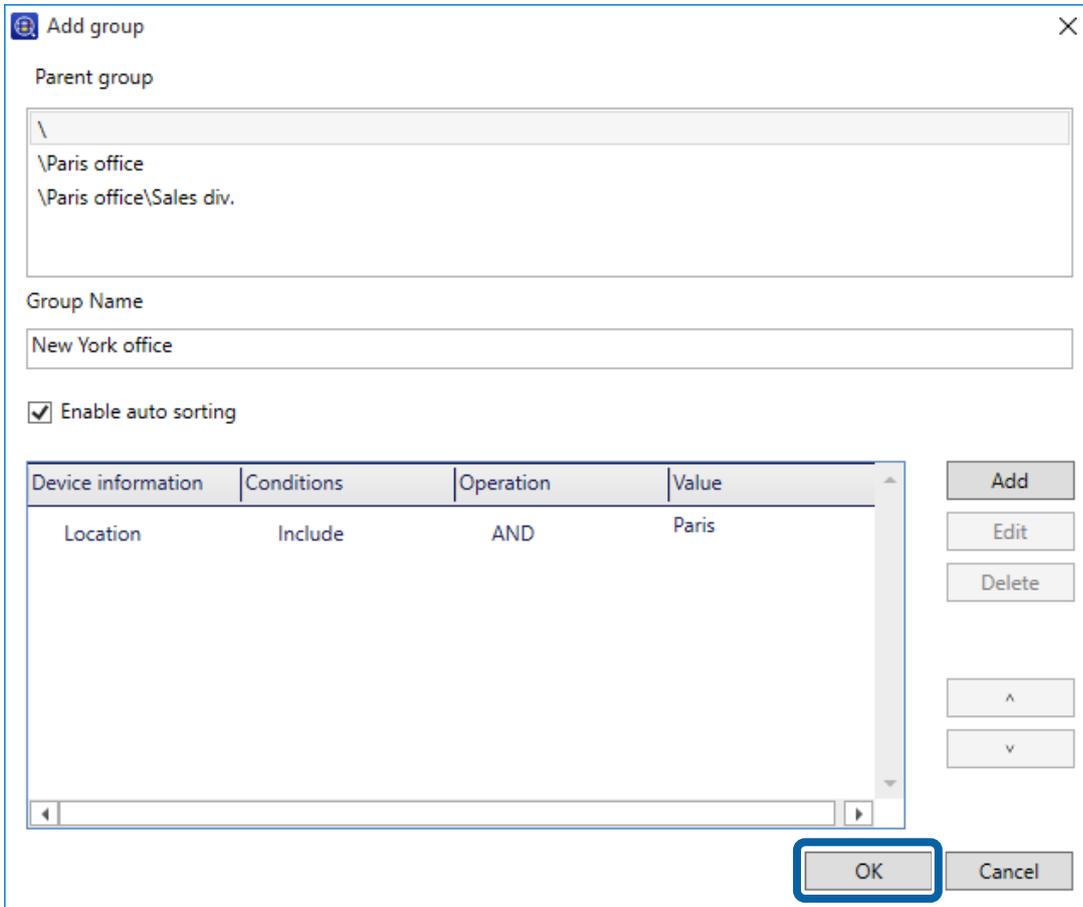

To continue adding the auto assign groups, click **Add**.

Click **Edit** to edit the group in the list.

Click **Delete** to delete the group from the list.

Click ^ or v to change the order of the conditions.

10. Click **OK**.

The newly created group is added to the tree view.

Add a device by creating a group

Register devices to the group after creating the group.

Note:

You can create up to 2,000 groups. There is no limit for groups in the same layer.


1. Select **Devices** on the side bar task menu.
2. Click the **Groups** tab on the ribbon menu.

3. Click **New**.




4. Select the group name to use as the parent from **Parent group**.

When creating a new group, layers are created by assigning the **User Defined Groups** as the parent group. You can create up to eight layers of groups.

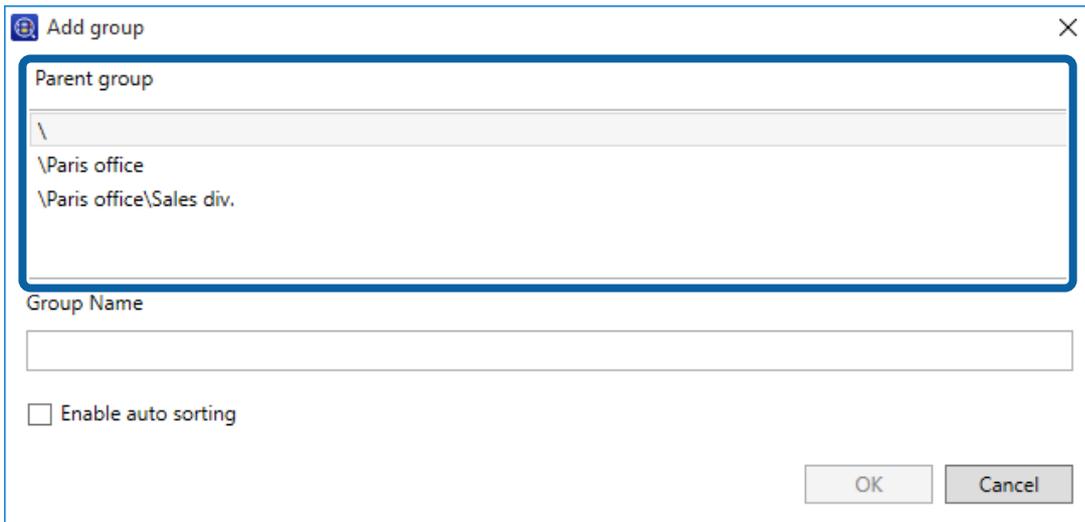


5. Enter a new group name in **Group Name**.

Enter up to 256 characters in Unicode for the group name. You cannot use \ or ;.

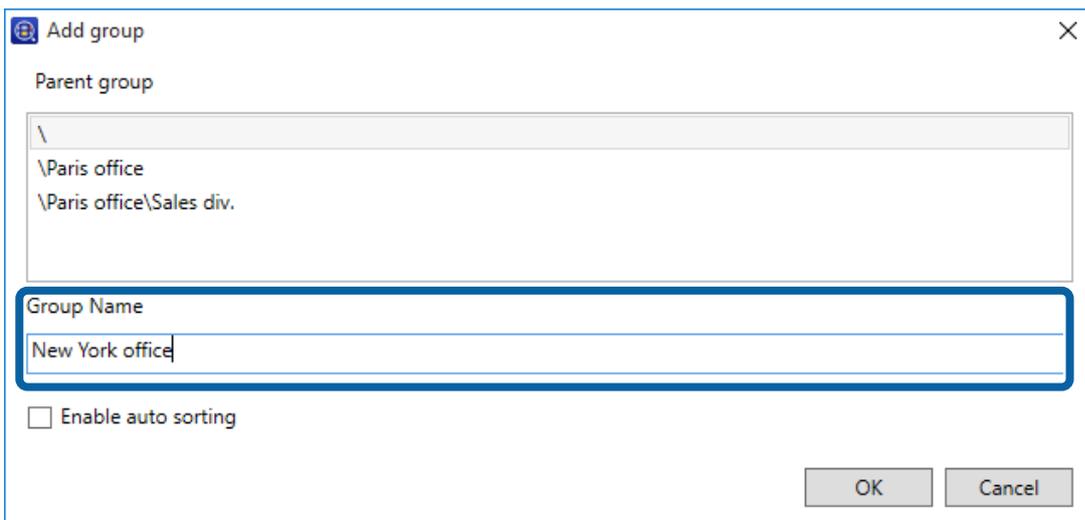

6. Click **OK**.

The new group is added to the tree view.

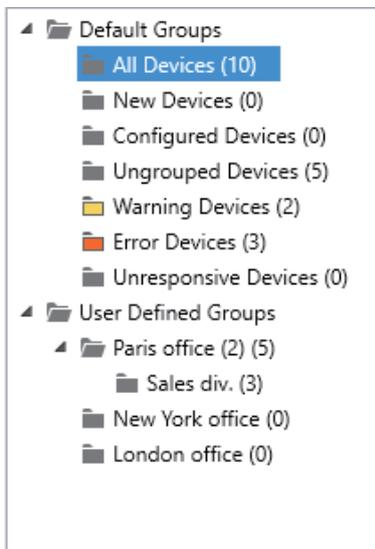


7. Click **Add/Remove Device(s)** on the ribbon menu.



8. Select the group to which you want to add the device, and then click **Next**.

The device list is displayed.

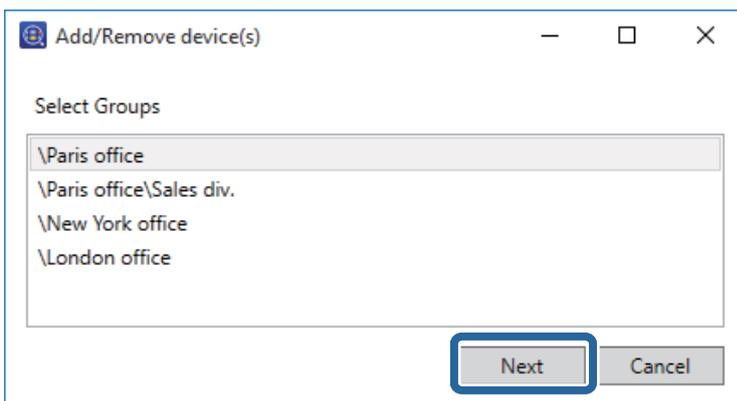


9. Select the device you want to register.

Select devices to register by **Select devices** and then click >.

Note:

To delete devices from the list, select the device in **Added devices**, and then click <.

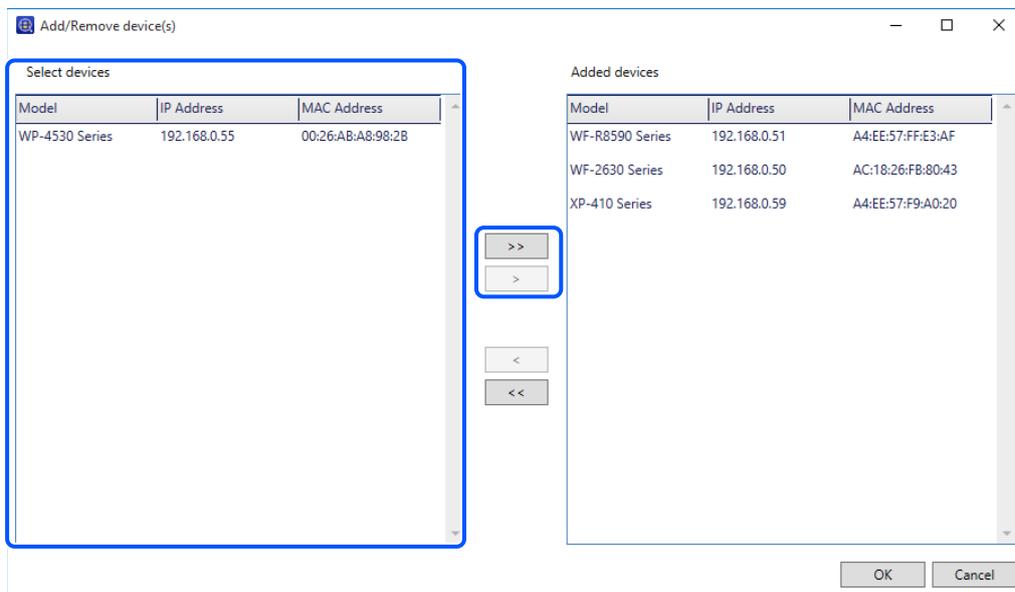

10. Click **OK**.

Exporting and importing device information

You can import and export the model names and serial numbers of devices belonging to a group in CSV format.

Exporting devices

1. From the tree view, select the group for which you want to export device information, and then right-click. A menu is displayed.
2. Select **CSV Export**.
3. Select the location to save the CSV file, and then click **Save**. A CSV file containing the device model name and serial number is saved.
4. Click **OK** on the export results confirmation screen.

Importing devices

1. Create a CSV file.
Enter one device per line.
Enter the device model name in column A, and the device serial number in column B.
Example of entering two models:
Model 1: LX-1000F, Serial number: A1B2C3D4E5

Model 2: LX-10020M, Serial number: B2C3D4E5F6

Enter:

LX-10000F,A1B2C3D4E5

LX-10020M,B2C3D4E5F6

2. Save the file in CSV format in the desired location.

Save the CSV file in the format selected in **Options > Formats > Format > CSV data delimiter** on the ribbon menu.

3. From the tree view, select the group for which you want to import device information, and then right-click. A menu is displayed.

4. Select **CSV Import**.

5. Select the CSV file you want to import, and then click **Open**.

The CSV file is imported.

6. Click **OK** on the import results confirmation screen.


Group editing

Change group names and parent groups in higher layers.


1. Select **Devices** on the side bar task menu.
2. Click the **Groups** tab on the ribbon menu.
3. Click **Edit**.



4. Select the group name to be edited from **Parent group**.

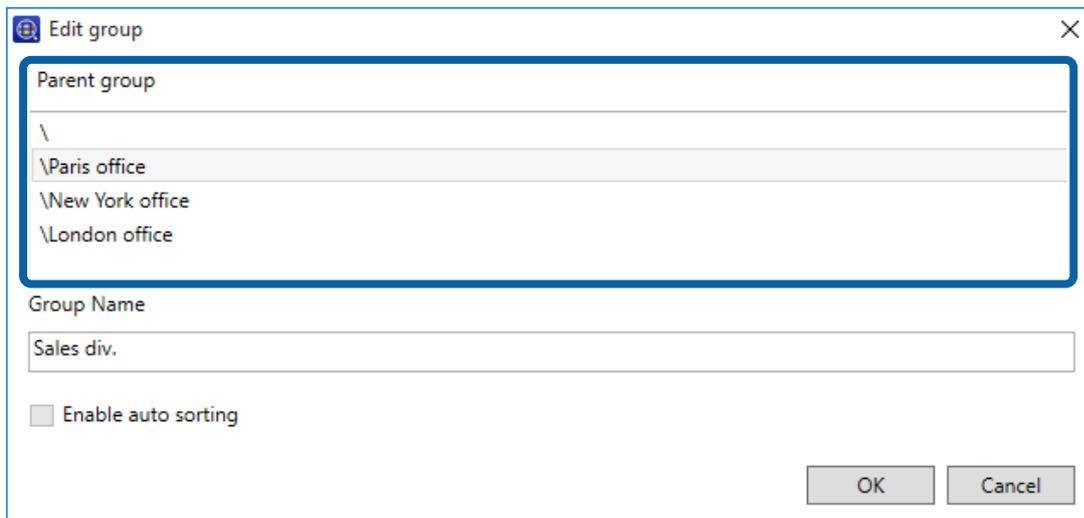


5. Change the group name in **Group Name**.
If you want to change parent groups, enter the name from the parent group name.

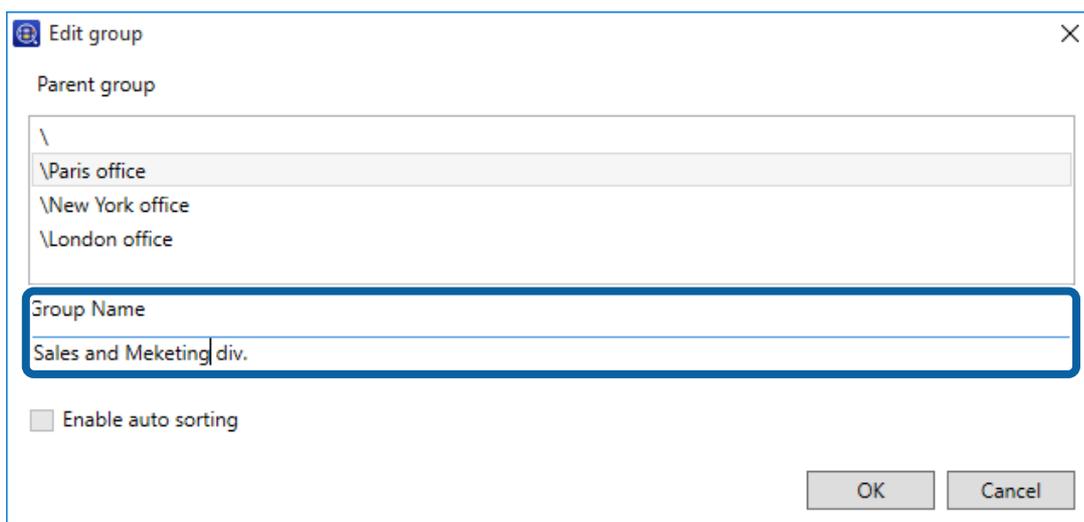

6. Click **OK**.

The changes are reflected in tree view.

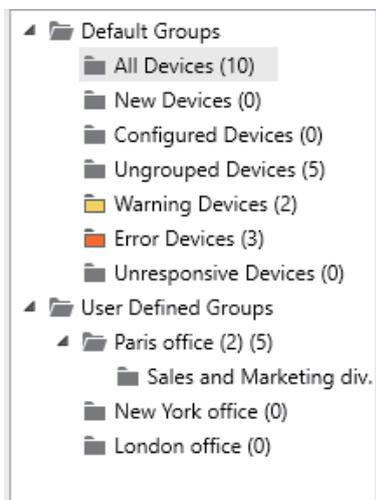

Deleting a group

1. Select **Devices** on the side bar task menu.
2. Click the **Groups** tab on the ribbon menu.
3. Select the group you want to delete, and then click **Delete**.



4. Click **OK**.


A screen is displayed asking you to confirm if you want to delete the group.

Deleting a group automatically deletes its sub-groups if there are any.

5. Click **OK**.

The changes are reflected in tree view.

Devices from deleted groups are displayed in **Ungrouped Devices**.

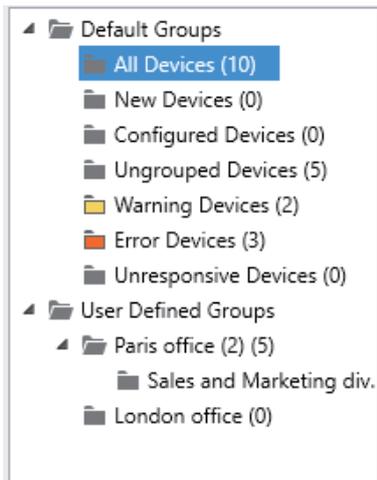

Device Management

This section explains how to configure one device at a time, and how to configure batch settings for multiple devices.

Device Settings

Configure settings for devices on the network individually or collectively. Apply configuration information as a template or manage devices by exporting configuration information to a SYLK file.

See the related information link below for details about the available methods.

- Configuration template
- Device properties and Embedded web server
- Batch Settings

Related Information

- ➔ [“Settings Template” on page 51](#)
- ➔ [“Setting or changing devices one at a time” on page 60](#)
- ➔ [“Batch Settings” on page 149](#)

Settings Template

Set devices using a configuration template. A configuration template uses the device's property settings as a template, and then applies the settings to other devices. You can manage setting information without relying on specific devices.

The following templates are provided as presets.

- Factory default settings (Network I/F)
Return the network interface settings for devices to their default settings.
- Factory default settings (All)
Return all settings for devices to their default settings.

Creating a configuration template

Divert the device settings, and then create templates.

- Create from configuration template management screen
Create by selecting a device to use as a configuration template.
- Create from device management screen
Create by selecting a device to use as a configuration template from the device list.

Creating from the configuration template management screen

1. Select **Configuration** on the side bar task menu.
2. Click **Save as Template**.


The device selection screen is displayed.



3. Select the base device to be used to create settings.

You can select groups to which devices are registered from the **Select group(s)** menu.


The base device must support unicast communication and the functions to be set.

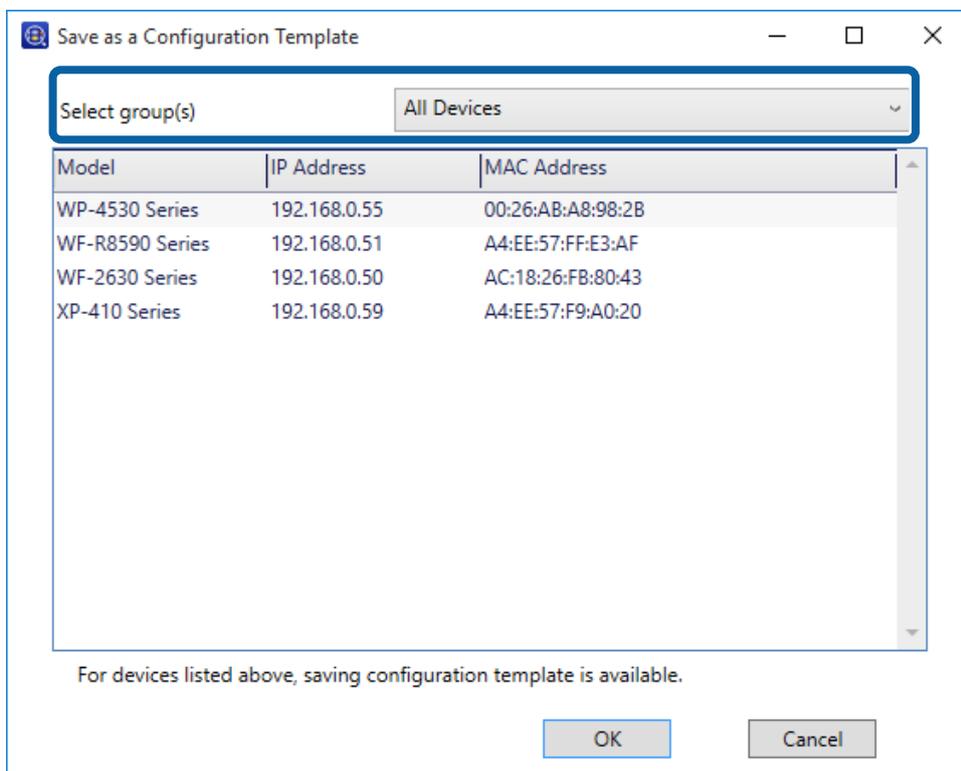

4. Click **OK**.

The configuration template information edit screen is displayed.

5. Enter information for each item.

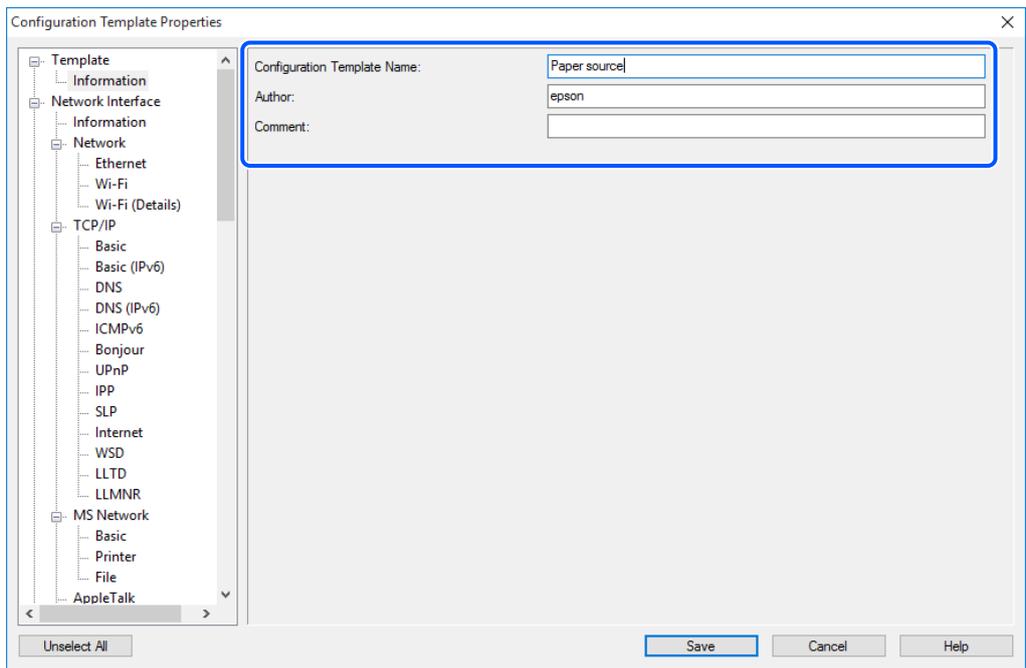


Item	Explanation
Configuration Template Name	Name of the configuration template. Enter up to 1,024 characters in Unicode (UTF-8).
Author	Information on the creator of the template. Enter up to 1,024 characters in Unicode (UTF-8).
Comment	Enter optional information. Enter up to 1,024 characters in Unicode (UTF-8).

- Select the check boxes next to the items to be setting values.

Note:

Some items are for writing only, and cannot be collected from the device and these fields are left empty. To make these settings, you need to enter a value manually.

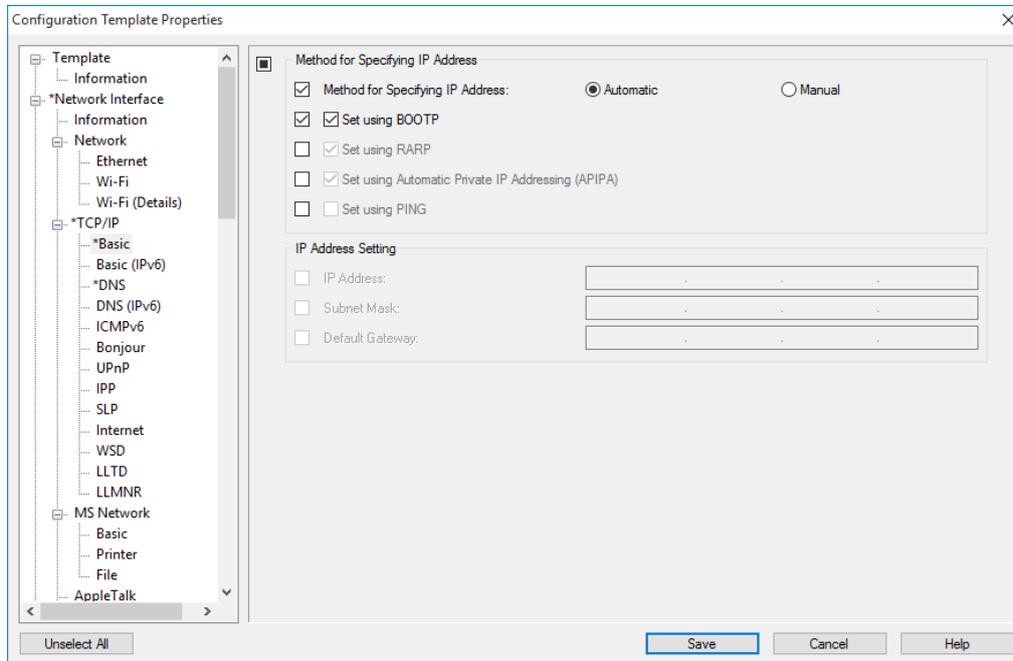

- Click **Save**.

The template is saved.

Creating from the device management screen

- Select **Devices** on the side bar task menu.
- Select the base device to be used to create settings from the device list.
The base device must support unicast communication and the features to be set.
- Click **Save as Configuration Template** on the ribbon menu.
The configuration template information edit screen is displayed.



Note:

You can also select from the menu displayed when you right-click the selected device.

- Enter information on the configuration template.
See step 5 in the last item for details.
- Change setting values as necessary, and then select the items you want to save to the template.

6. Click **Save**.

The template is saved.

Applying configuration template

You can apply setting information to groups or individual templates by using a configuration template.

Items used to set target devices with the selected configuration template are applied.

You can apply settings using the following methods.

- Select devices and apply

Select devices from the device list, and then select the configuration template. You can select devices to be applied by confirming device information in the list.

- Select configuration template and apply

Select a configuration template from the configuration template management screen, and then select devices.

You can check the content of configuration templates in the list.

Note:

You can export the configuration template application results log to a CSV file.

Select devices and apply


1. Select **Devices** on the side bar task menu.
2. Select the devices to which you want to apply the configuration template from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

3. Click **Apply Configuration Template** on the ribbon menu.


The device selection screen is displayed.

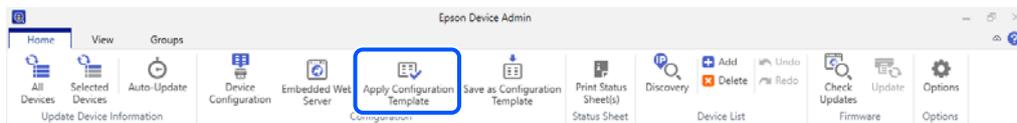

Note:

You can also select from the menu displayed when you right-click the selected device.

4. Select the configuration templates you want to apply from **Select a configuration template**.

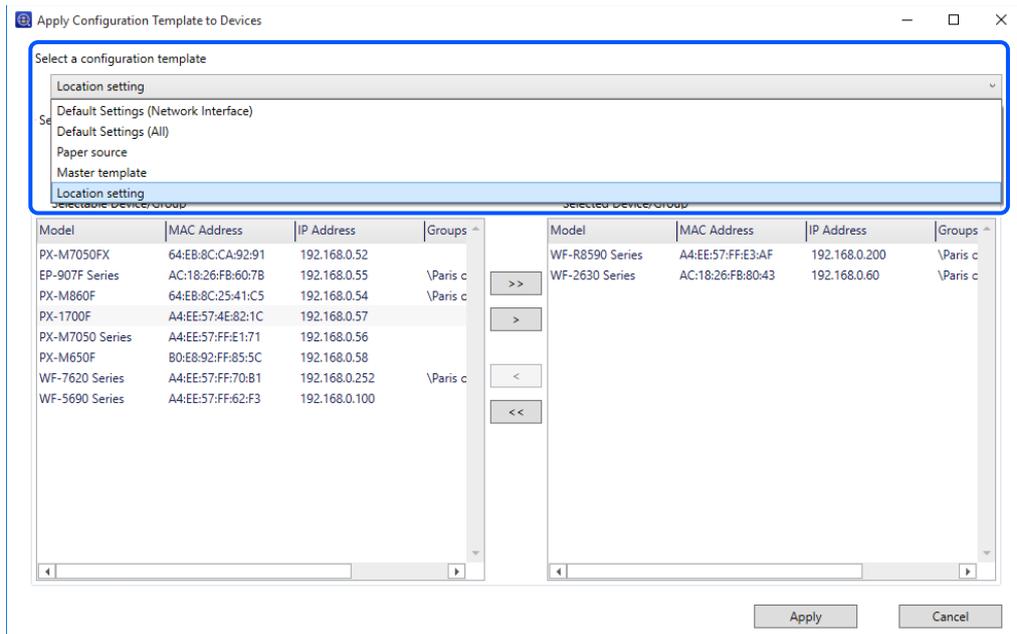


5. Check that the devices to which you want to apply the configuration template are in the list.

The devices to which the settings will be applied are in the **Selected Target** list. To change these, move devices or groups by using >, >>, <, and <<.

Use > to move the selected device or group, and use >> to move all devices or groups.

Note:

- When you select **Devices** and groups containing devices from the pull-down menu, each device is displayed.
- Groups are displayed when you select **Groups**. Select **Include child group(s)** to automatically select child groups within the selected group.

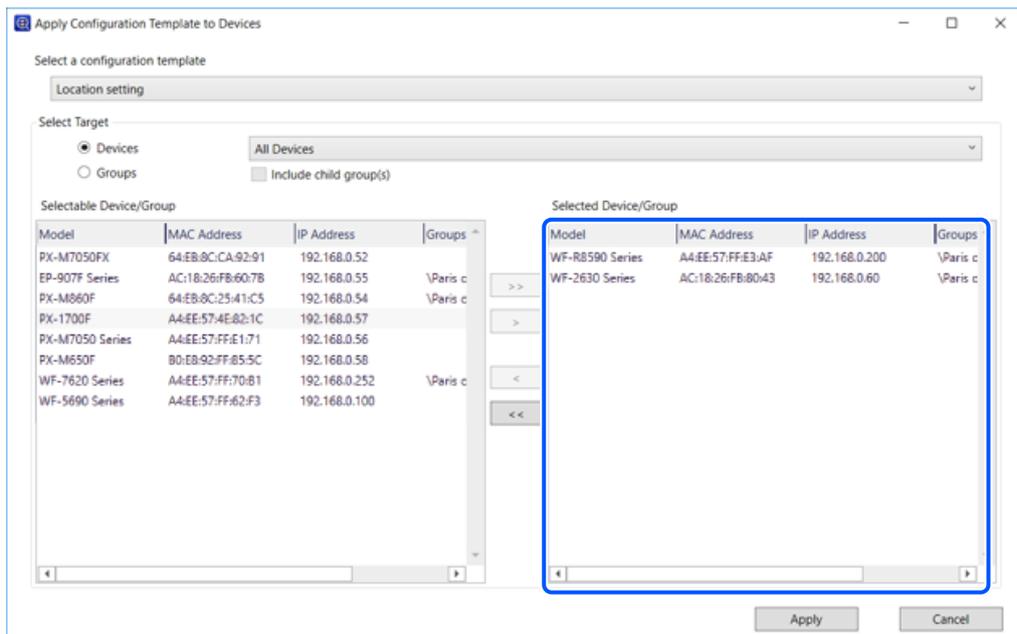


6. Click **Apply**.

A confirmation screen for the configuration template to be applied is displayed.

7. Click **OK**.

A confirmation screen for the application results is displayed.

8. Check the content, and then click **Close**.

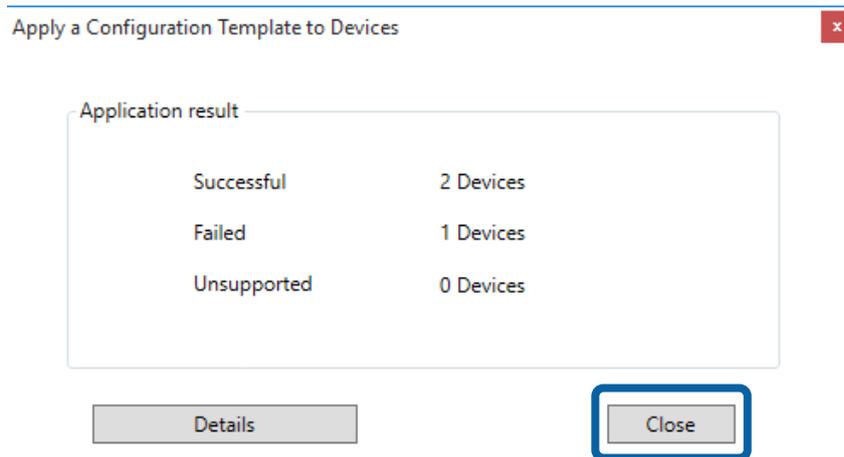


You can check detailed information by clicking **Details**.

Select configuration templates and apply


1. Select **Configuration** on the side bar task menu.

2. Click **Apply**.

The device selection screen is displayed.

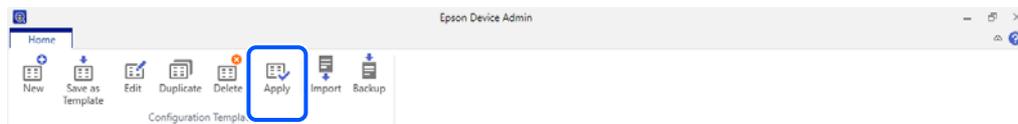

3. Select the configuration template you want to apply from **Select a configuration template**.

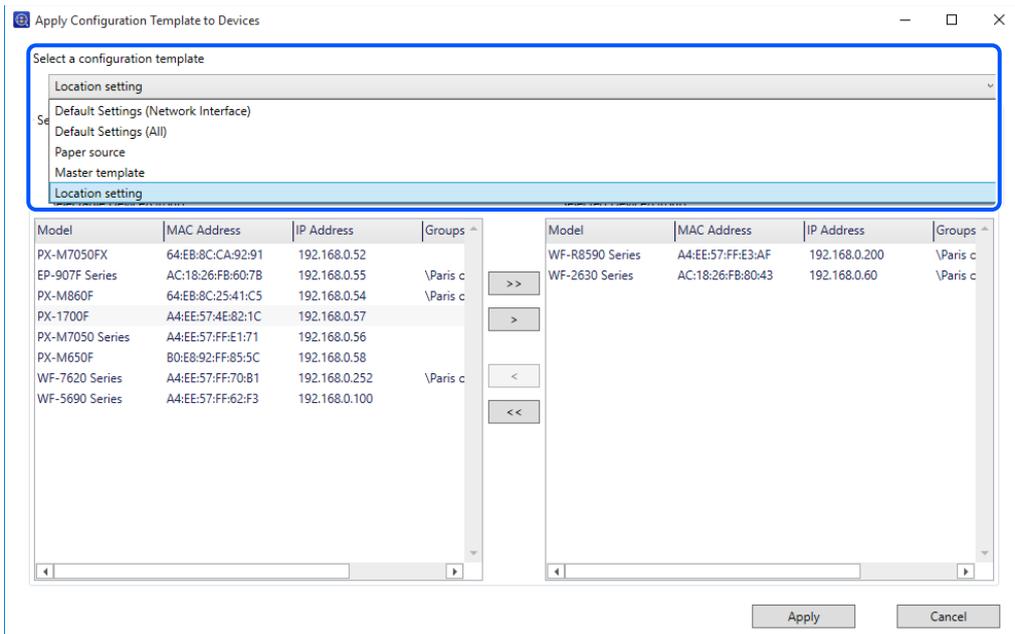


4. Select the devices to which the configuration template will be applied.

The devices to which the settings will be applied are in the **Select Target** list. To change these, move devices or groups by using >, >>, <, and <<.


Use > to move the selected device or group, and use >> to move all devices or groups.

Note:

- When you select **Devices** and groups containing devices from the pull-down menu, each device is displayed.
- Groups are displayed when you select **Groups**. Select **Include child group(s)** to automatically select child groups within the selected group.

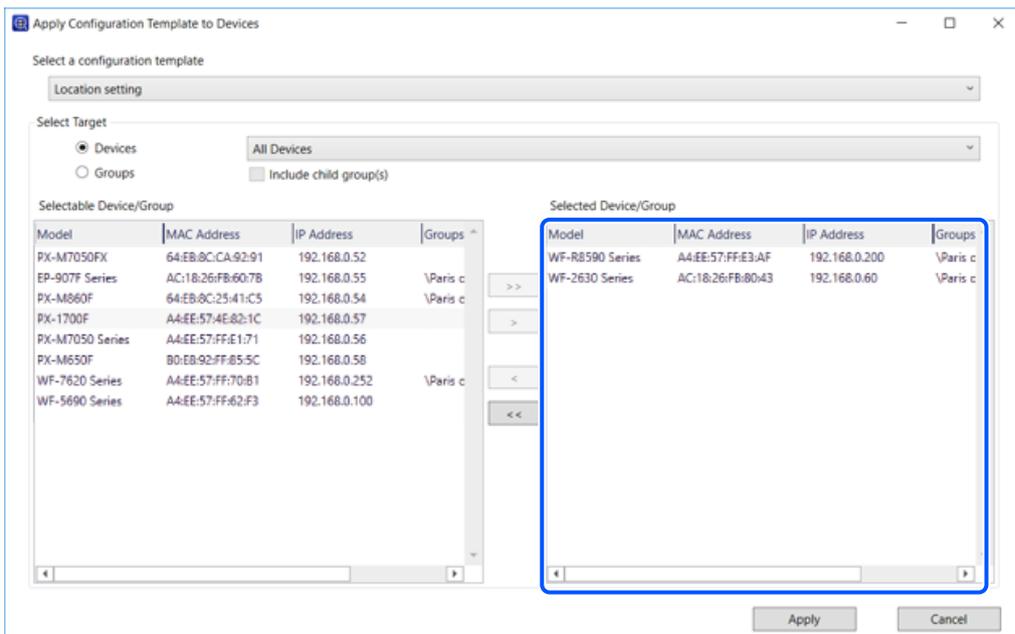

5. Click **Apply**.
A confirmation screen for the configuration template to be applied is displayed.
6. Click **OK**.
A confirmation screen for the application results is displayed.
7. Check the content, and then click **Close**.

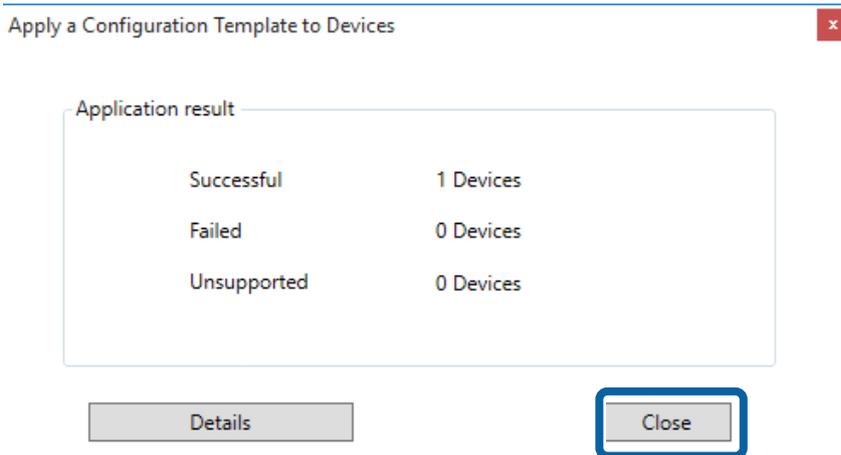

You can check detailed information by clicking **Details**.

Configuration template application log

You can check the results of applying a configuration template.

1. Select **Configuration** from the sidebar task menu.
2. Select **Log** from the tree view.
The applied configuration template is displayed in **Configuration Template Name** at the top.
3. Select the configuration template name for which you want to check the log.
Application details are displayed at the bottom.
You can export the application log to a CSV file by right-clicking, and then selecting **CSV Export** from the menu displayed.


About the Detailed Log Information button

This is displayed when the results of applying the configuration template includes **Detailed Information**.
Click this to display the Detailed Log Information screen to view additional information.

Editing configuration templates

You can change, duplicate, and delete a saved configuration template.

1. Select **Configuration** on the side bar task menu.
2. Select the configuration template you want to edit.
3. Click **Edit**, **Duplicate**, or **Delete** on the ribbon menu.

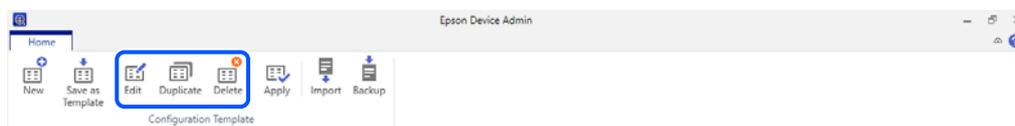

4. Edit the configuration template.

You can perform the following actions for each item.

Edit

Change the setting values for the selected configuration template.

Click **OK** to save your edits.

Duplicate

Creates a copy of the selected configuration template.

Edit the configuration template name in the text box as necessary. Click **OK** to save the copied template.

Delete

Deletes the selected configuration template.

You cannot delete preset configuration templates. The selected configuration template is deleted when you click **OK** on the confirmation screen.

Exporting and importing configuration templates

You can export and import a saved configuration template. You can use this for maintenance or backup. See the related information link below for details.

Related Information

➔ [“Configuration templates” on page 141](#)

Setting or changing devices one at a time

Device properties screen

Configure one device at a time by using the Device Properties screen.

Note:

You cannot configure the device while acquiring device information using the schedule function.

1. Select **Devices** on the side ber task menu.
2. Click the **Home** tab on the ribbon menu.

3. Select the device you want to configure from the device list.


Note:

When you select multiple devices, you cannot configure them. If you want to configure more than one device, use the Configuration Template or the Batch Setting function.


See the related information link below for details.

4. Click **Device Configuration**.

The Device Properties screen is displayed.

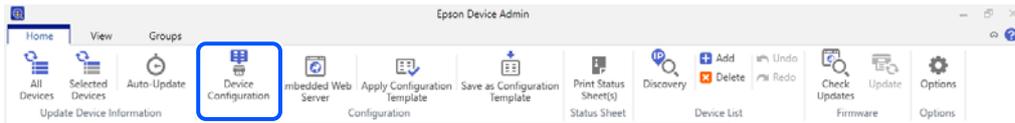

When the password entry screen is displayed, enter the password, and then click **OK**.

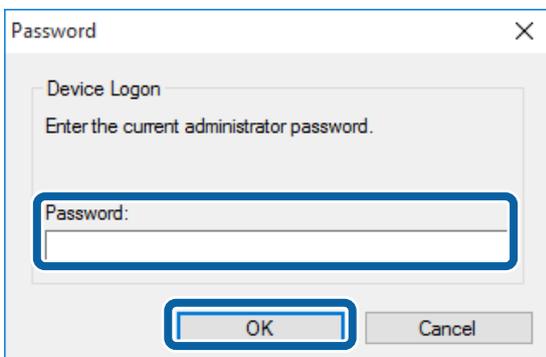


5. Set each item as necessary.

Set the device to match the environment being used. Displayed items differ depending on the model being used.


See the following for the setting methods for each item.

Epson Device Admin Help "Device Properties"


6. Click **Transmit** to set the necessary items.

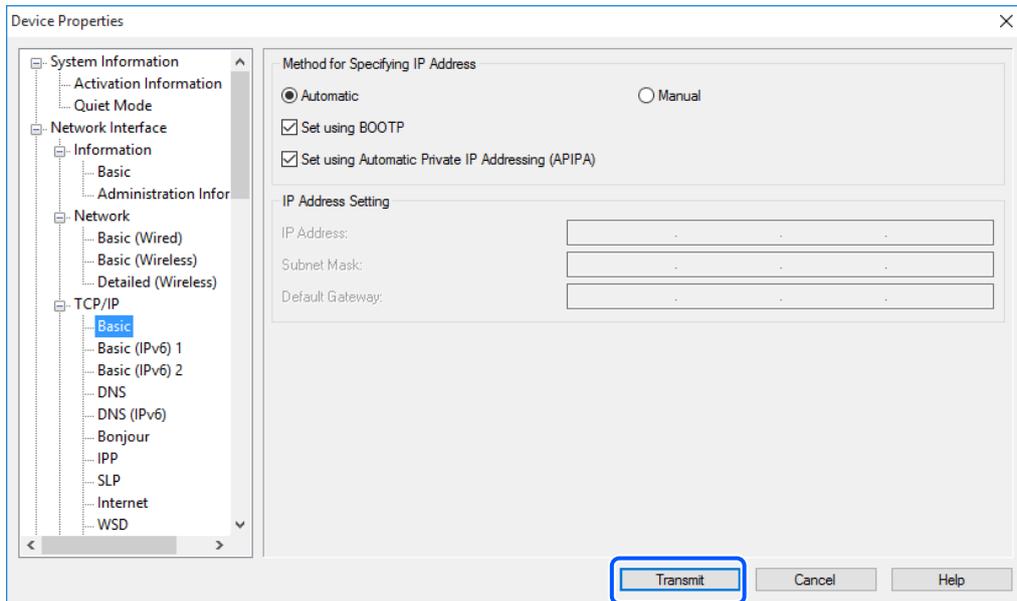

7. Click **OK**.

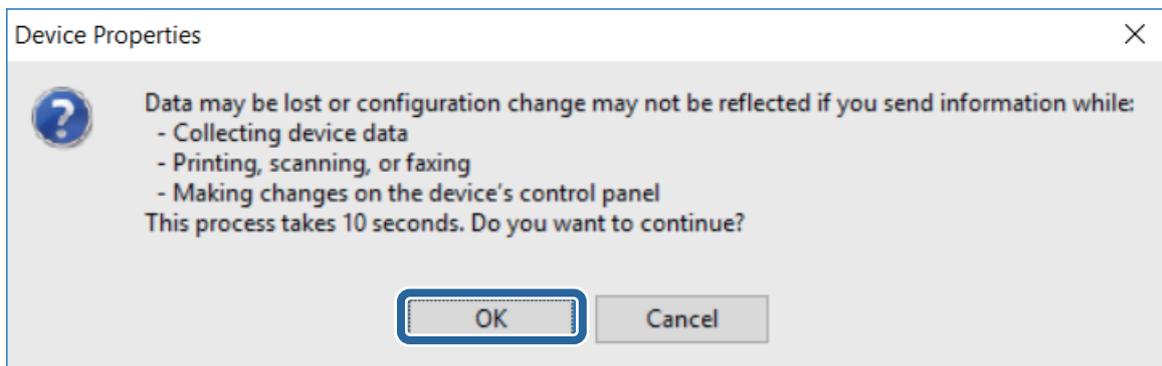

When the password entry screen is displayed, enter the password, and then click **OK**.

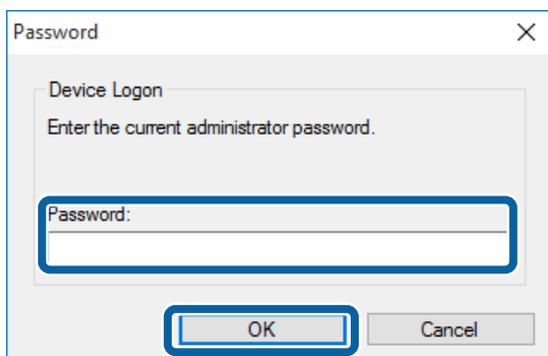


Transmit the settings.

Note:

- ❑ The information is transmitted to the device, and then the message "Configuration successfully completed." is displayed. Do not turn off the device or the wireless adapter, and do not send any data to the device.
- ❑ See the related information link below when setting the password.

8. Click **OK**.

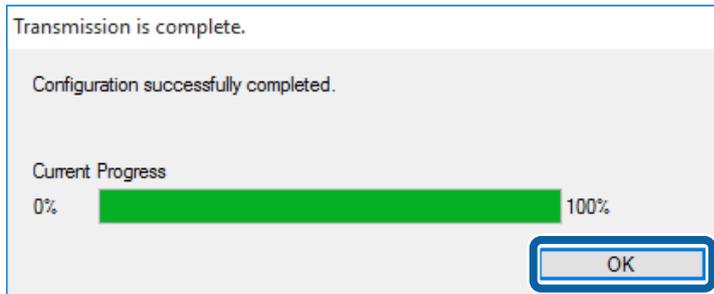

9. It can take up to three minutes until the settings are enabled. Do not turn off the device or wireless adapter during this time.

The icon  is displayed in the device list while setting up the device.

- ❑ If the icon  remains after three minutes has passed, check the status of the device or the wireless adapter.
- ❑ If the ! icon is displayed, communication with the IP address could not be completed. Check that the IP address is enabled in the environment being used.

Related Information

- ➔ [“Settings Template” on page 51](#)
- ➔ [“Setting an Administrator Password” on page 64](#)

Using an embeded web server to make device settings

You can run Embedded Web Server (Web Config, EpsonNet Config (Web), or Remote Manager) when an IPv4 IP address is set to allow unicast communication.

1. Select **Devices** on the side ber task menu.
2. Click the **Home** tab on the ribbon menu.
3. Select the device you want to configure from the device list.


Note:

When you select multiple devices, you cannot configure them. If you want to configure more than one device, use the Configuration Template or the Batch Setting function.

See the related information link below for details.

4. Click **Embedded Web Server**.

The Embedded Web Server is displayed.

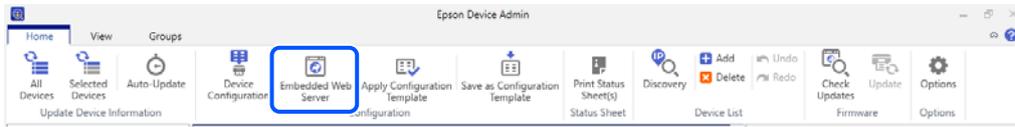

Note:

- If you cannot select **Launch Browser**, check that the IP address has been changed from its default setting, or that the IP address is not already in use.
- The message "There is a problem with this website's security certificate." may be displayed when running the embedded web server. (The message varies depend on the browser.) This is displayed because the device uses SSL communication (encrypted communication) to protect your personal information. Click "Continue to this website (not recommended).".

5. Set each item as necessary.

Set the device to match the environment being used. Displayed items differ depending on the model being used.

Related Information

➔ ["Settings Template" on page 51](#)

Setting an Administrator Password


You can use an administrator password to protect device settings. By default, no password is set. For security reasons, we recommend setting one.

Setting individually

Configure one password at a time by using the Device Properties screen.

1. Select **Devices** on the side bar task menu.
2. Select the device you want to configure from the device list.
If the device is not displayed, check that the device or wireless adapter is turned on, or if the device is in the same segment as the computer.
3. Click **Device Configuration** on the **Home** tab in the ribbon menu.

4. Click **Administrator Settings > Admin Password**, and then enter the password in **New Password** and **Reenter New Password**.

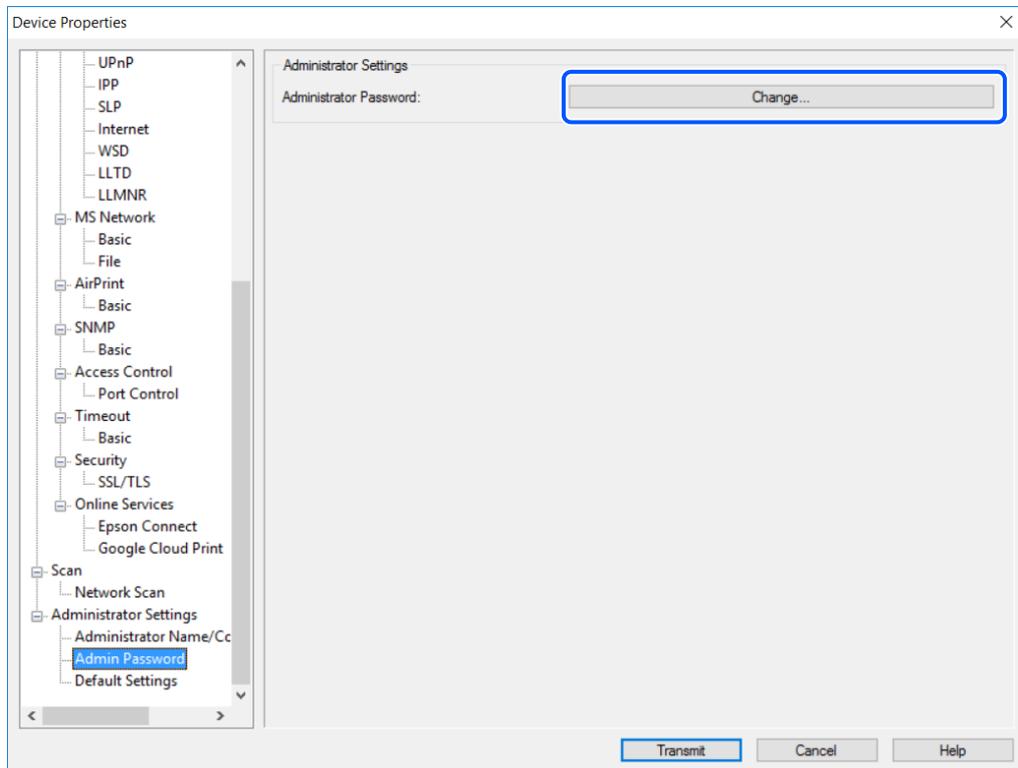

5. Click **Transmit** to set the necessary items.

It can take up to three minutes until the settings are enabled. Do not turn off the device or wireless adapter during this time.

Note:

The device administrator passwords are shared with each application used in network settings. Make sure you manage the administrator password carefully.

Managing passwords in batches

You can save the password for devices in Epson Device Admin.

Managing passwords automatically

You can change settings without having to enter device's password the next time once an administrator password is authenticated. Password information is saved to the data base of this software, and the software refers to the device's MAC address after authentication.


You do need to enter the password when changing passwords of devices after saving password information. When the revised password is authenticated, saved password information is updated.

Note:

This function is not accessible when batch settings or firmware update are in progress.

1. Select **Devices** on the side bar task menu.

2. Click **Options** on the ribbon menu.
3. Select **Password manager**.
4. Select **Enable automatic password management**.

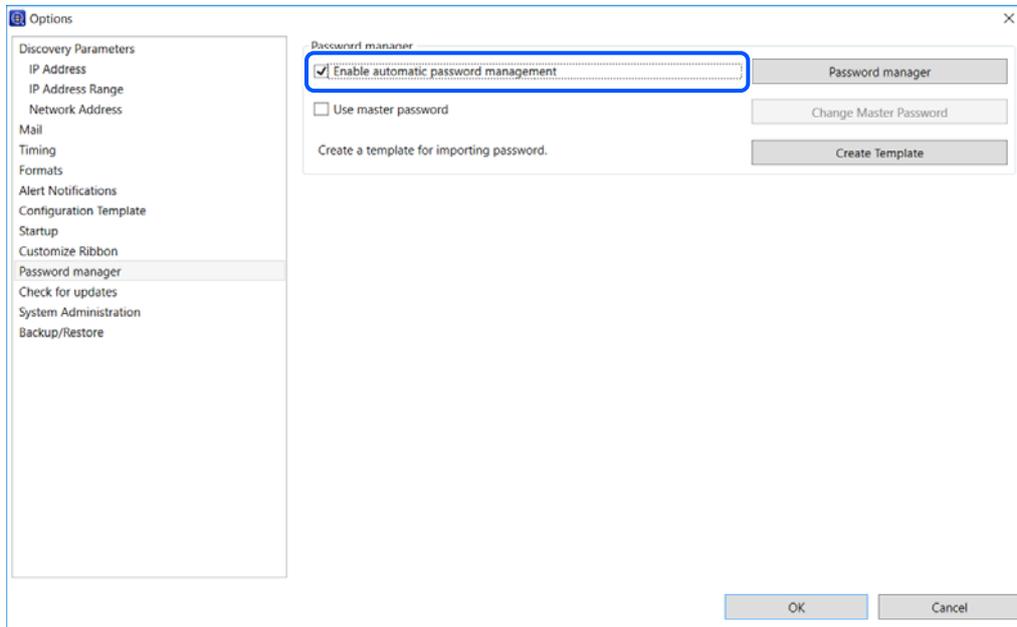

5. Click **OK**.

Setting a master password

If you set a master password, you need to enter the password when displaying the password list.


Creating a new master password

Set a new master password. Once it has been set, you need to enter the password if you change it.

1. Select **Options > Password manager**.


2. Select **Use master password**.

The change master password screen is displayed.

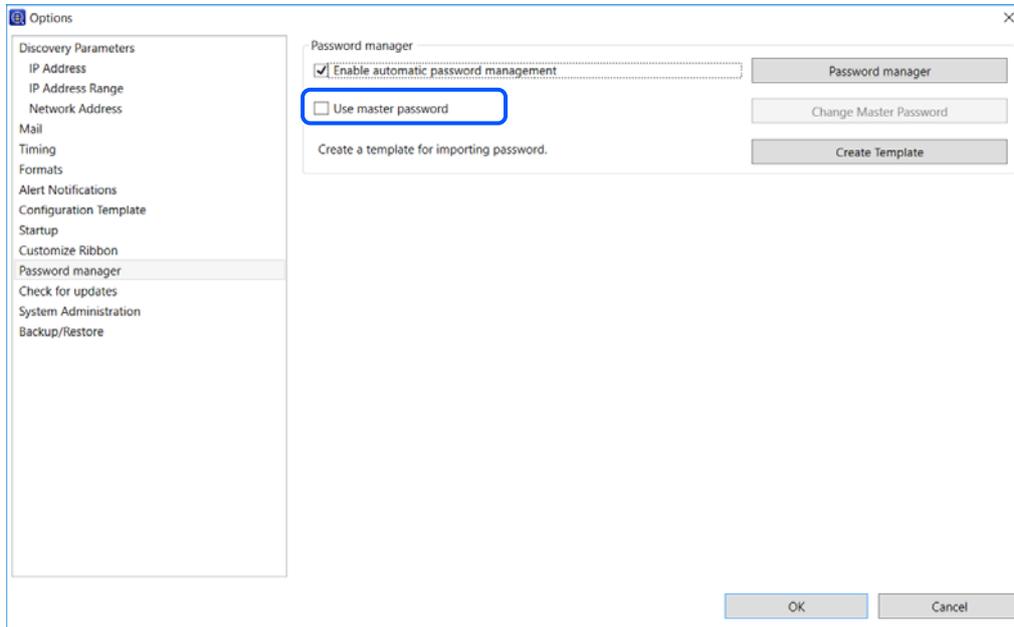

3. Enter the master password in **New Password** and **Confirm new password**.

Enter the password you want to set using up to 20 ASCII characters.

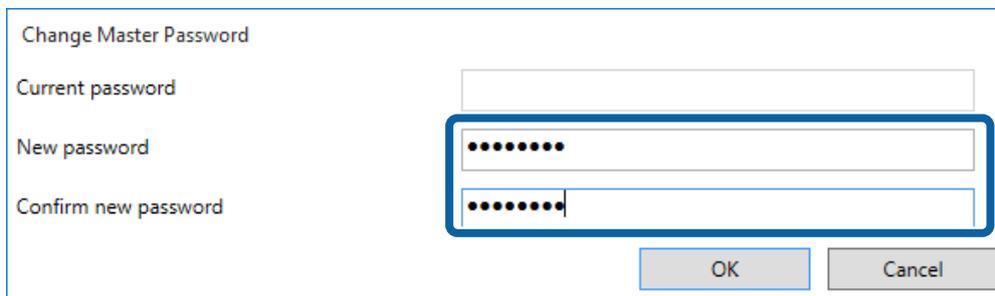

4. Click OK.

Changing the master password

You need to enter the password to change the master password settings.


Note:

*You also need to enter the password when you clear **Use master password**.*


1. Select **Options > Password manager**.

2. Click **Change Master Password**.

The change master password screen is displayed.

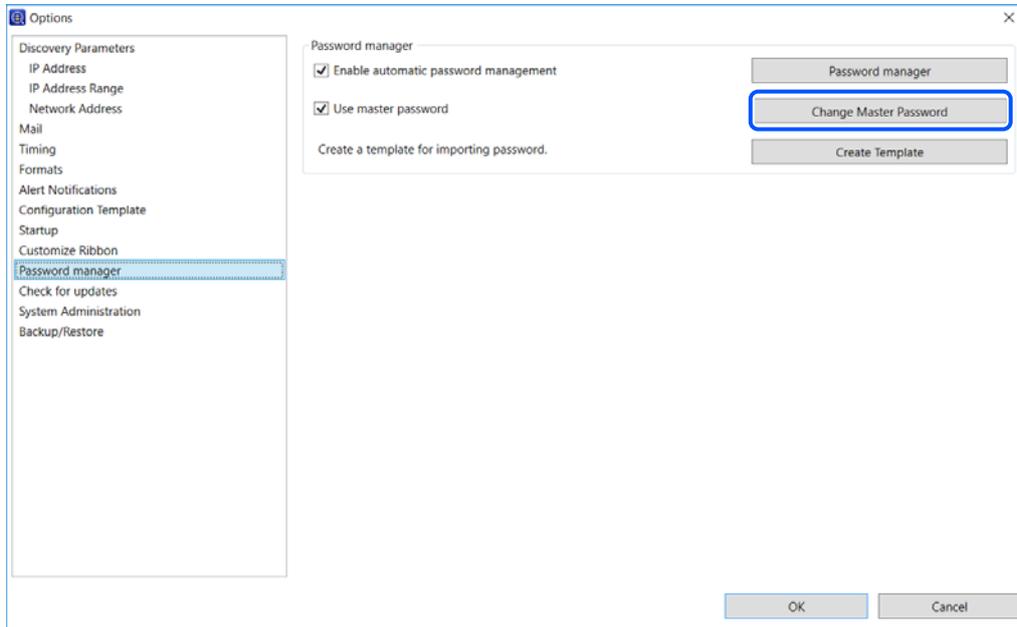


3. Enter the current master password in **Current password**.

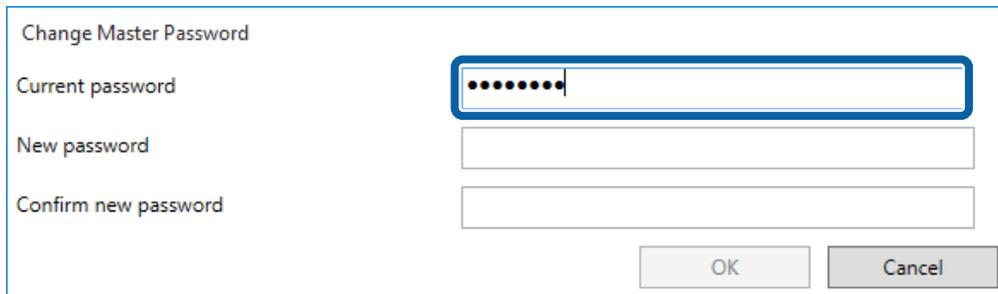

4. Enter the new master password in **New Password**, and then enter the same password in **Confirm new password**.

Enter the password you want to set using up to 20 ASCII characters.

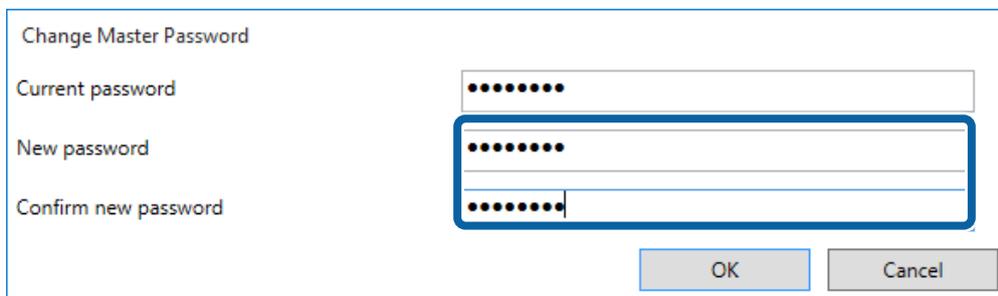

5. Click **OK**.

Editing an administrator password using the list

You can edit the administrator password for a device using the password management list.

See the related information link below for details on backing up and restoring the password management list.

Related Information

➔ [“Password settings” on page 133](#)

Adding and editing a password


Add or change an administrator password.

1. Select **Options > Password manager**.
2. Click **Password manager**.

The password management screen is displayed.

Note:


When a master password is set you need to enter the password.

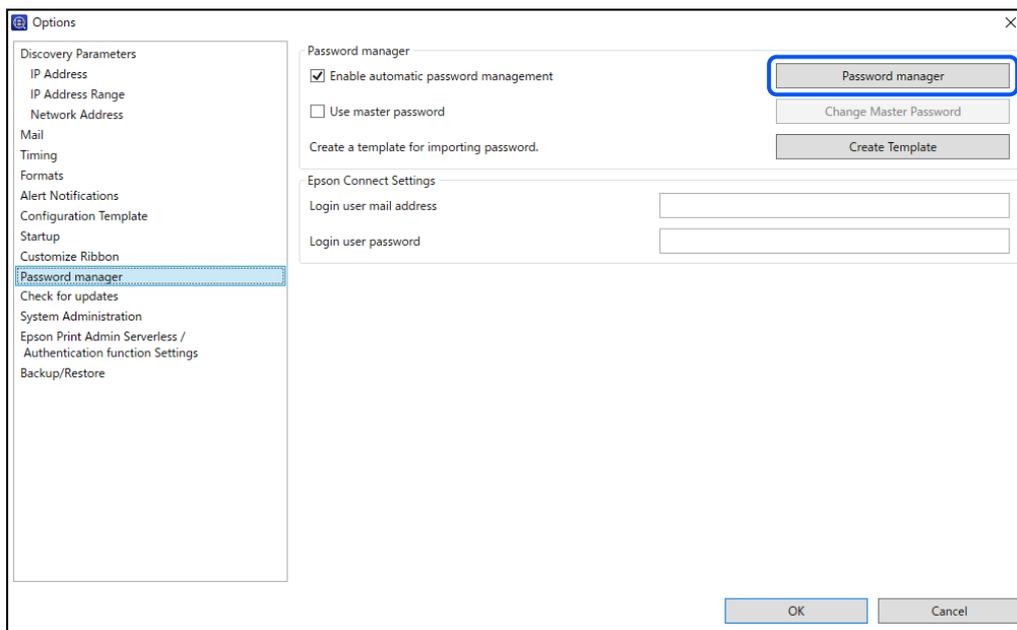


3. Click **Add** when setting a new password, and when changing settings select devices and then click **Edit**.
The add password screen is displayed.

Note:


You can change the group display for devices in **Group**.

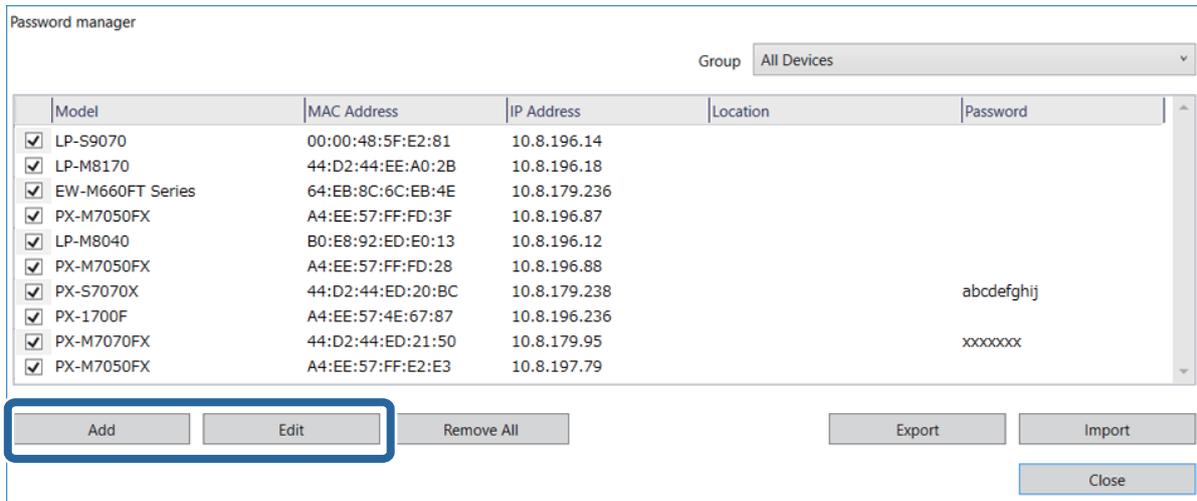

- When making new settings, enter the MAC address for the device.
When changing settings, the registered MAC address is displayed and cannot be edited.

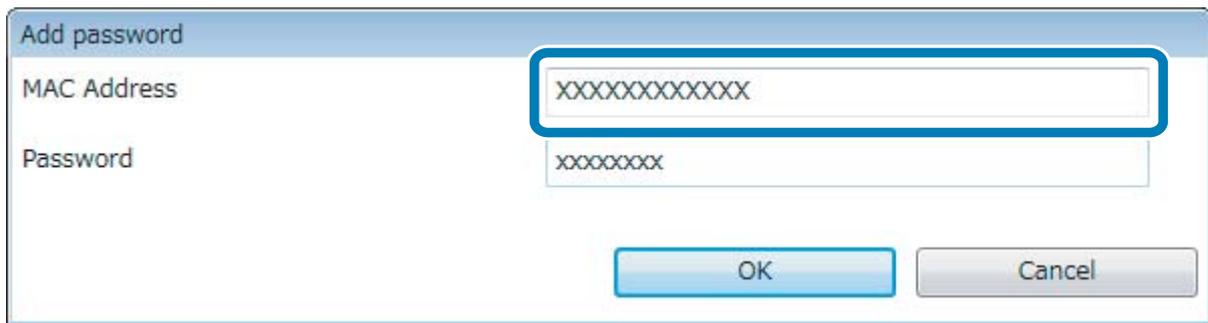


- Enter any password in **Password**.
Enter the password you want to set using up to 20 ASCII characters.

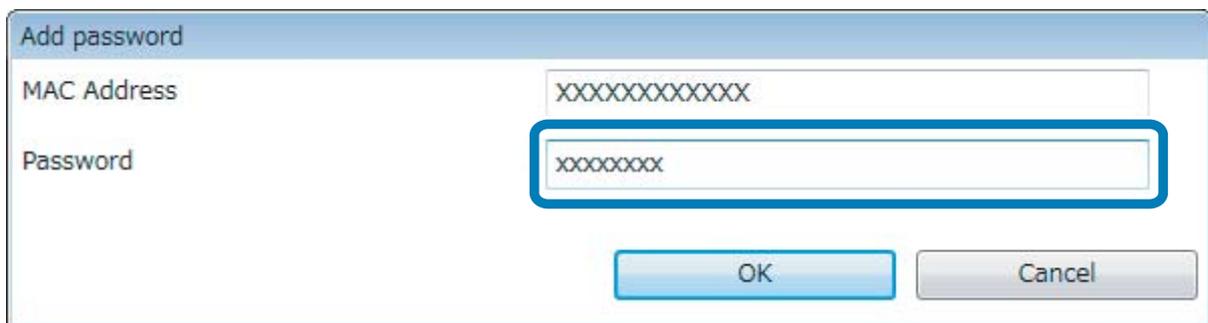

- Select the check-box next to the device that you want to manage.
Selected: Enables automatic authentication and password saving.

Cleared: Disables automatic authentication and password saving.

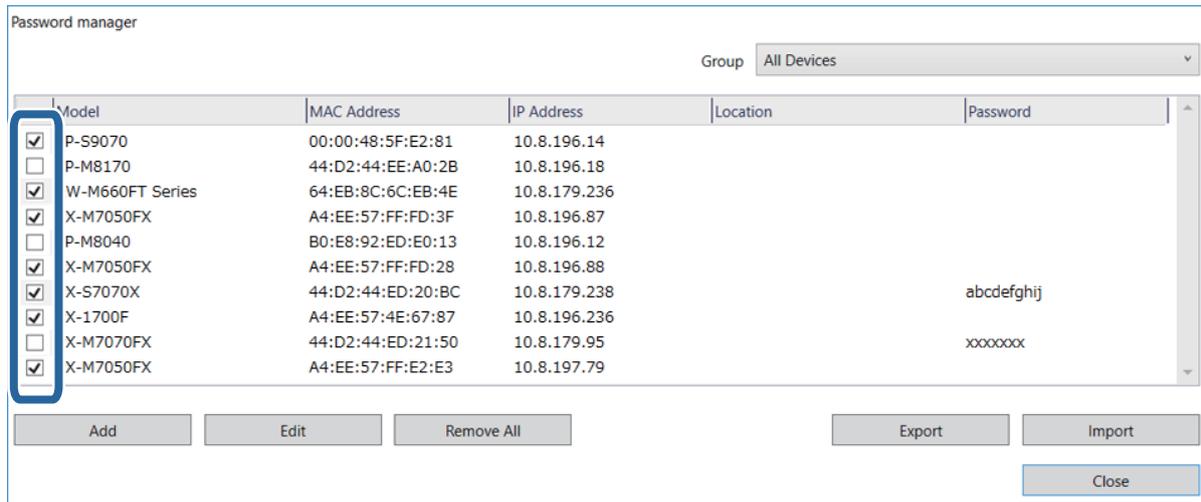

Registering Different Address Books

You can import email addresses, target folders, abbreviated fax numbers from a product and edit the data.

Editing individually

See the related information link below for the batch setting function.


Note:

This function is only available for supported models.

1. Select **Devices** on the side bar task menu.
2. Select the device you want to configure from the device list.
3. Click **Device Configuration** on the **Home** tab on the ribbon menu.
4. Click the item you want to edit from the following. Displayed items differ depending on the device being used.
 - Common > Contacts**
 - Administrator Settings > Access Limitation**
 - Scan > Mail Settings**
 - Scan > Target Folder**
 - Fax > Reception > FAX to Folder**
 - Fax > Reception > E-Mail**
 - Fax > Fax Number**

See the following for detailed information on each item.

Epson Device Admin Help "Device Properties"

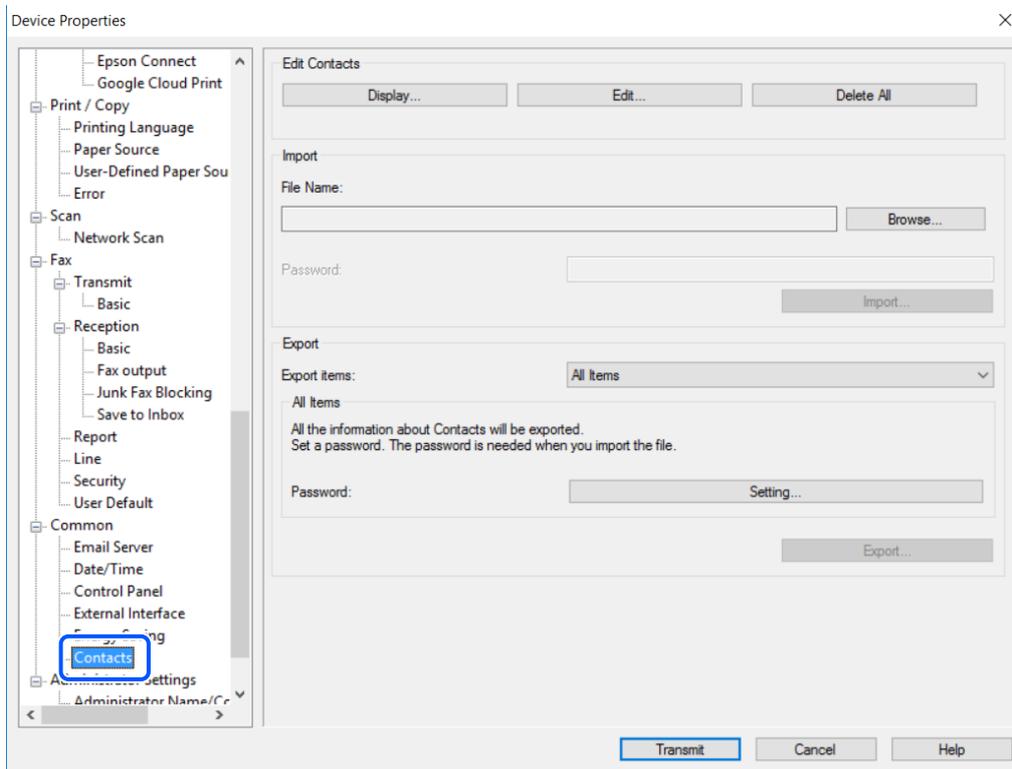


5. Click **Edit**.


This step is unnecessary on the **Administrator Settings > Access Limitation** screen, **Scan > Mail Settings/Target Folder**,

Fax > /Reception > E-Mail/FAX to Folders screens, and **Fax > Fax Number** screen. Go to step 6.

6. Select the number you want to edit, and then click **Edit**.

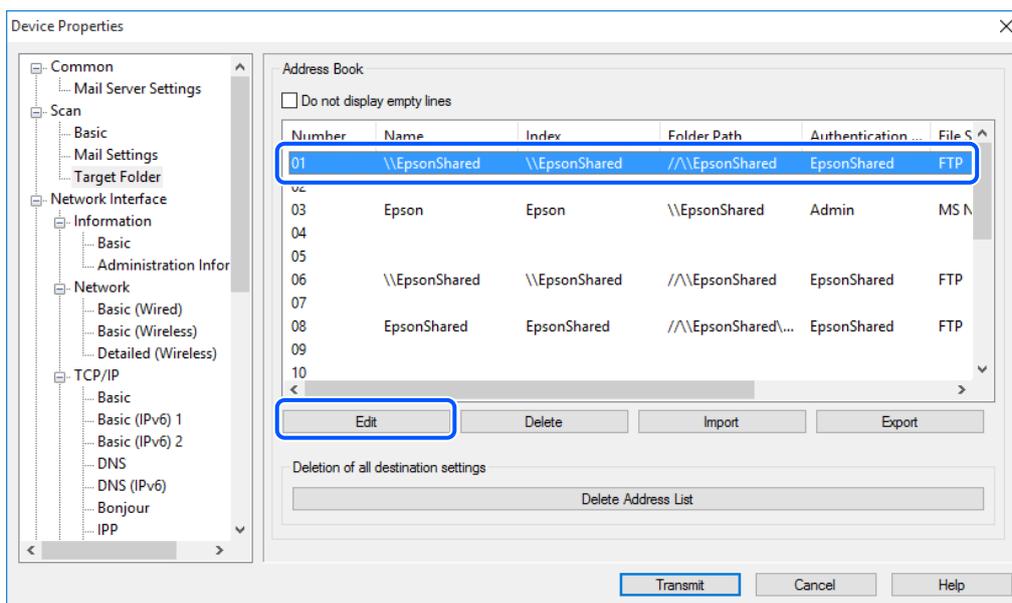


7. Set each item, and then click **OK**.

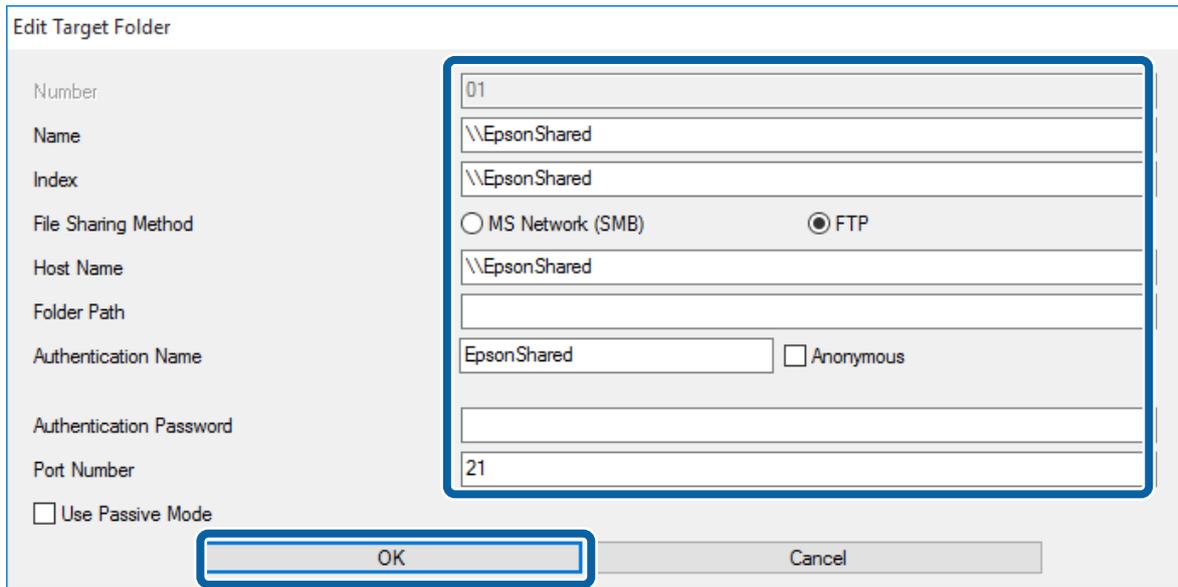


8. If all settings are complete, click **Transmit**.

9. When a confirmation screen is displayed, click **OK** to start transmitting the settings.

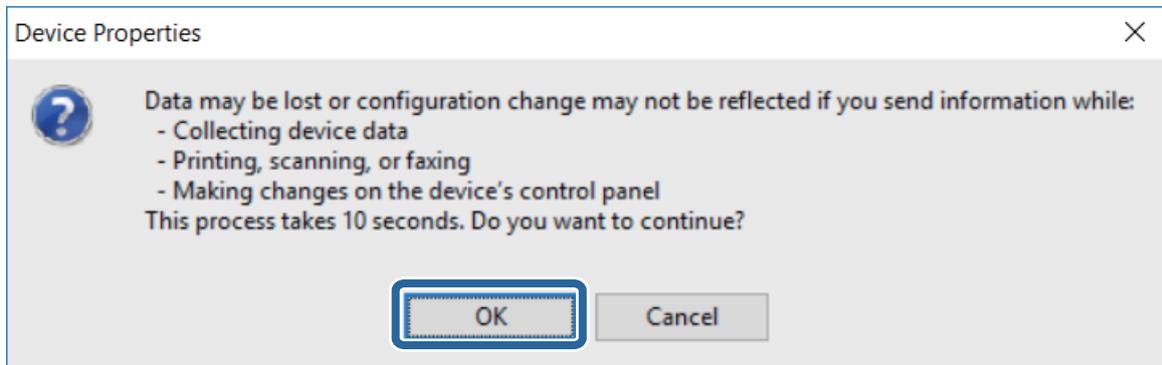

10. Click **OK** to complete transmission.

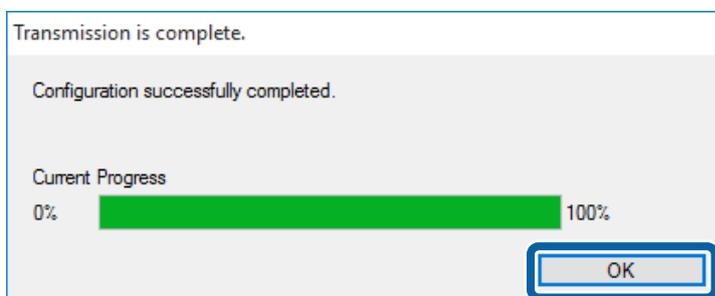

Related Information

➔ [“Making batch settings” on page 74](#)

Making batch settings

Creating a settings file

You can save and edit information for the same item.

You can save information that includes security items such as private information by setting a password. You cannot edit this file. See the related information link below for details.

1. Select **Devices** on the side bar task menu.
2. Select the device you want to configure from the device list.
3. Click **Device Configuration** on the **Home** tab on the ribbon menu.
4. Click the item you want to edit. Displayed items differ depending on the device being used.

Common > Contacts

Administrator Settings > Access Limitation

Scan > Mail Settings

Scan > Target Folder

Fax > Reception > E-Mail

Fax > Fax Number

See the following for detailed information on each item.

Epson Device Admin Help "Device Properties"

5. Select an export method.


If you select **All Items**, you need to set a password for the file.

On Administrator Settings > Access Limitation screen, when you click **Export** in the next step, you can then select an export format.

This step is unnecessary on the **Scan > Mail Settings/Target Folder** screens, **Fax > Reception > E-Mail** screens, and **Fax > Fax Number** screen. Go to step 6.


6. Click **Export**.

Screen for Contacts.

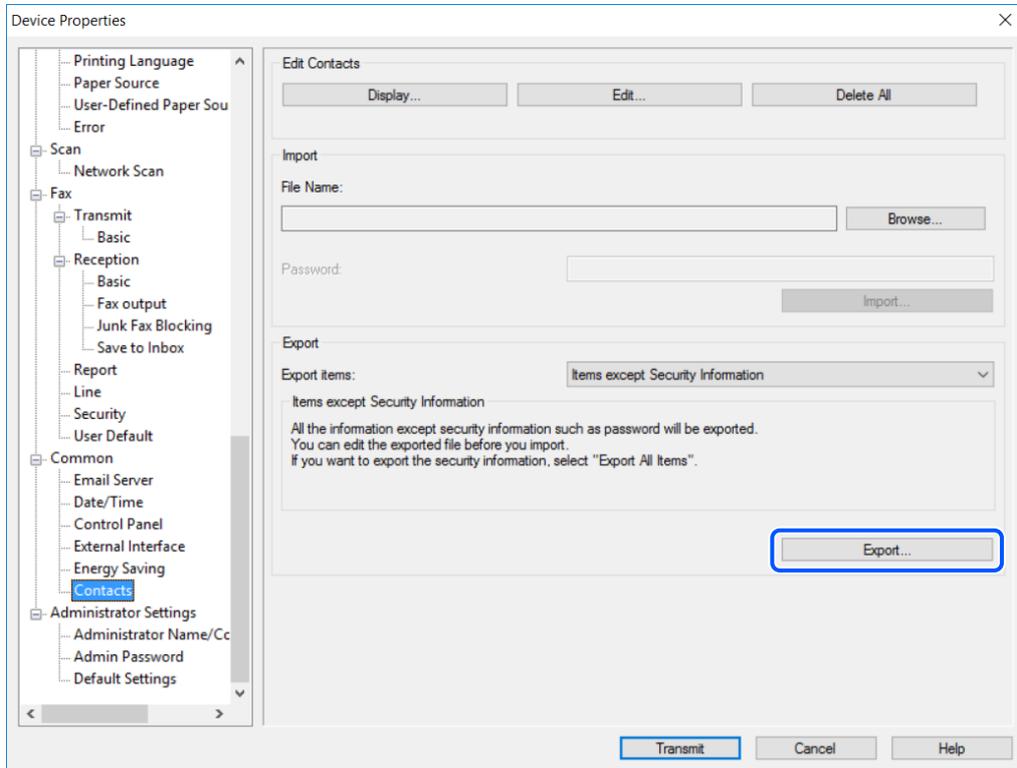

7. Enter a file name, and then click **Save**.

A SYLK format file is saved with the extension ".slk".

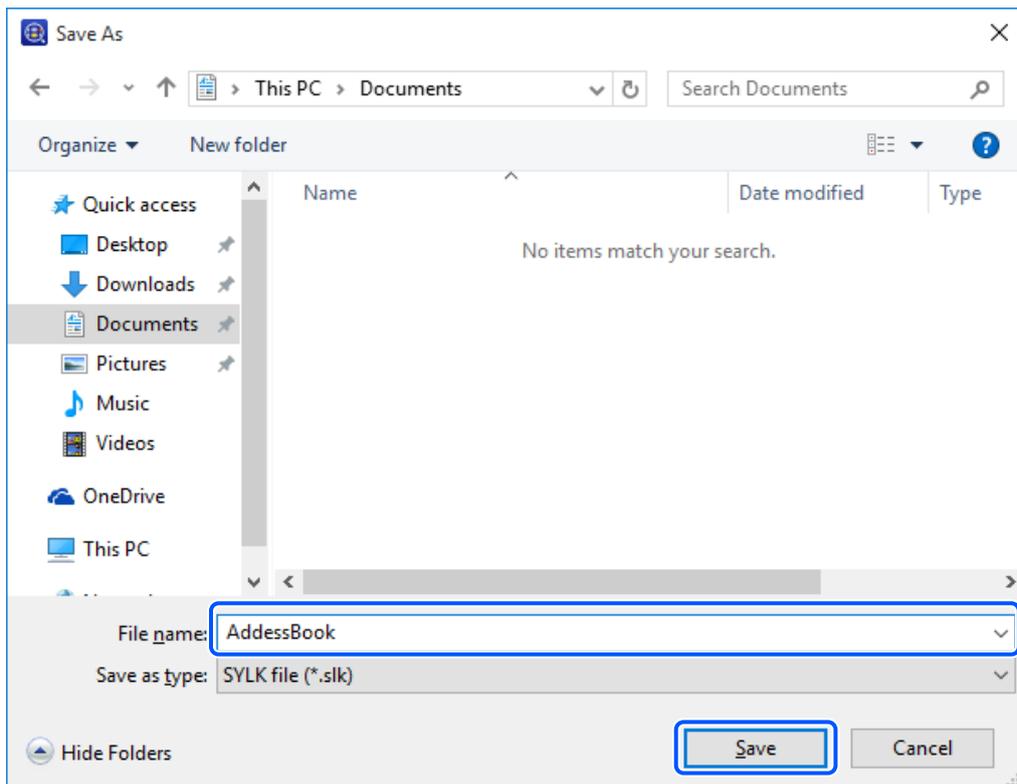

- Open the SYLK file you saved in a spreadsheet application such as Microsoft Excel or in a text editor, and then edit the information.

	1	2	3	4	5	6	7
1	Number	Name	Index	Address	Type	IsGroup	GroupIndex
2	01	ABC Marke	MK	001	2	0	
3	02	ABC Sales	SL	002	2	0	
4	03	ABC Desig	DS	003	2	0	
5	04				-1	0	
6	05				-1	0	

- Save the edited SYLK format file.

Related Information

➔ [“Exporting by setting a password” on page 136](#)

Reading the settings file

The software can read edited settings files.

See the related information link below for details on binary files that include security items such as passwords and private information.

- Select **Devices** on the side bar task menu.
 - Select the device you want to configure from the device list.
- Note:*
To make multiple selections, press **Ctrl** or **Shift** and click your mouse.
- Click **Device Configuration** on the **Home** tab on the ribbon menu.
 - Click the item you want to edit. Displayed items differ depending on the device being used.

- Common > Contacts**
- Administrator Settings > Access Limitation**
- Scan > Mail Settings**
- Scan > Target Folder**
- Fax > Reception > E-Mail**
- Fax > Fax Number**

See the following for detailed information on each item.

Epson Device Admin Help "Device Properties"


- Click **Browse**, and then select the file you want to import.

You need to enter the password when importing a binary file (.ene file).


On **Administrator Settings > Access Limitation** screen, **Scan > Mail Settings/Target Folder** screen, **Fax > Reception > E-Mail** screen, and **Fax > Fax Number** screen, when you click **Import** in the next step, you can then select a file.

6. Click **Import**.

Screen for Contacts.

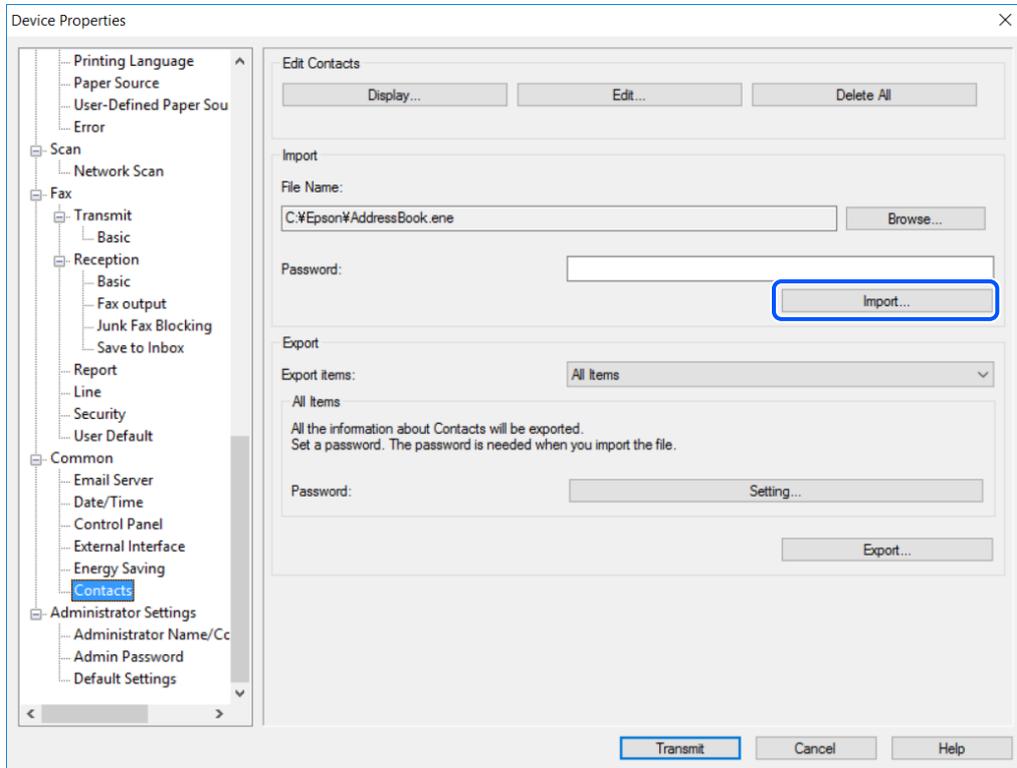


7. When the "Start Import Wizard Confirmation" message is displayed, click **OK**.

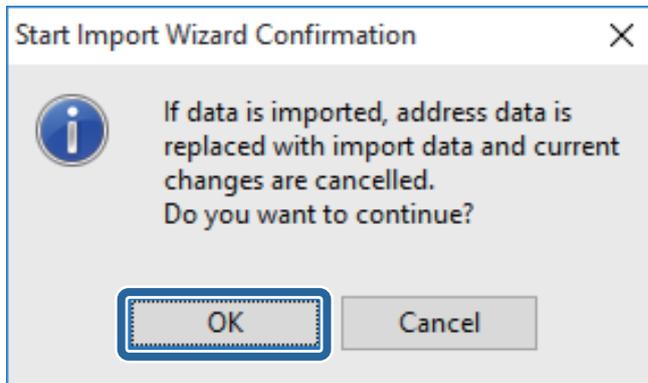


8. Check the information in Imported Information, and then click **Import**.
If you want to import multiple files, click **Read more file**.


9. Click **Transmit**.

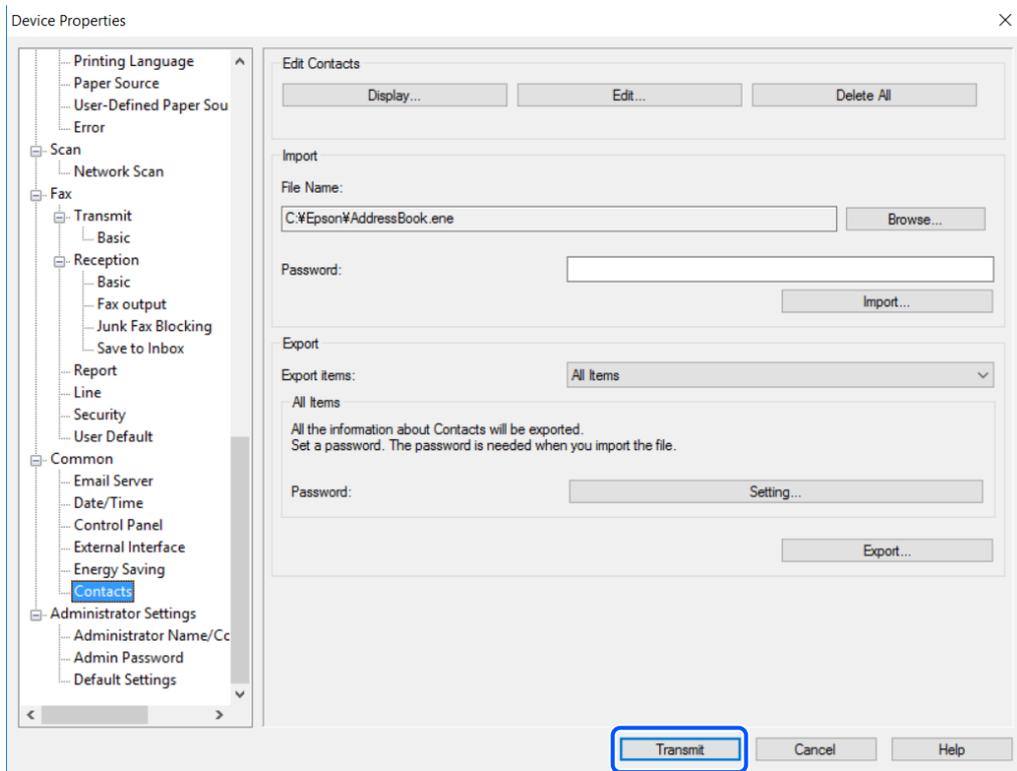

10. When a confirmation screen is displayed, click **OK** to start transmitting the settings.

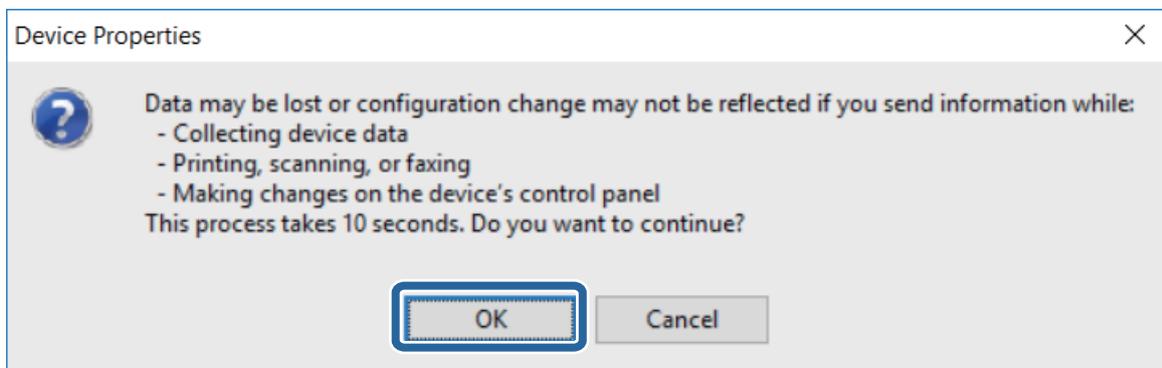

11. Click **OK** to complete transmission.

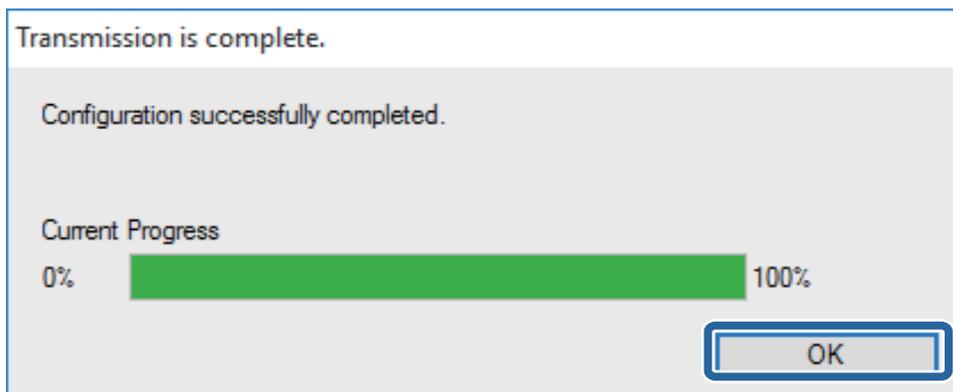

Related Information

➔ [“Importing files containing security information” on page 138](#)

Updating Device Firmware

You can check for the latest firmware and then update the device's firmware if necessary.

The compatibility status of each device is displayed in the **Certificate** column on the device selection screen.

Certificate	Explanation
Trusted certificate	Devices with CA-issued certificates.
Untrusted certificate	Devices that do not have a CA-issued certificate configured.
-	Devices that do not support firmware updates using HTTPS communication.
Unconfirmed	Devices for which certificate verification cannot be performed under the following conditions. <ul style="list-style-type: none"> <input type="checkbox"/> An error has occurred on the device or it is offline. <input type="checkbox"/> Allow access from Epson tools is set to Not Allowed in the settings on the main device.

Updating firmware


Check the firmware version site for the device, and update the firmware if necessary. Updates can only be performed for devices that support the features registered to the device list.

Before updating you need to make settings to allow access to external sites.

See the related information link below for details.

1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Select **Check Updates**.

Access external site to check for updates.

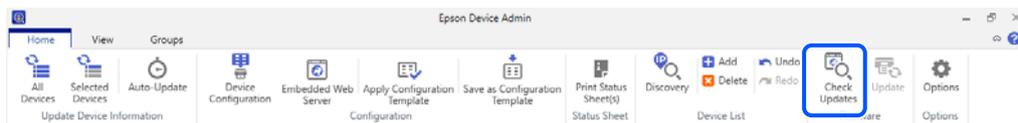

Display in the device list when firmware is updated.

Related Information

➔ [“Check for updates” on page 33](#)

Firmware Update Schedule

When you create firmware update schedules for devices, the firmware is automatically updated at the date and time you specified. You can update multiple devices at the same time.

Creating a Firmware Update Schedule

Create a firmware update schedule to specify the device that you want to update and the update date and time.


1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Click **Update**.

The Firmware updates screen is displayed.




4. Click **New**.


The firmware update schedule creation Wizard is displayed.

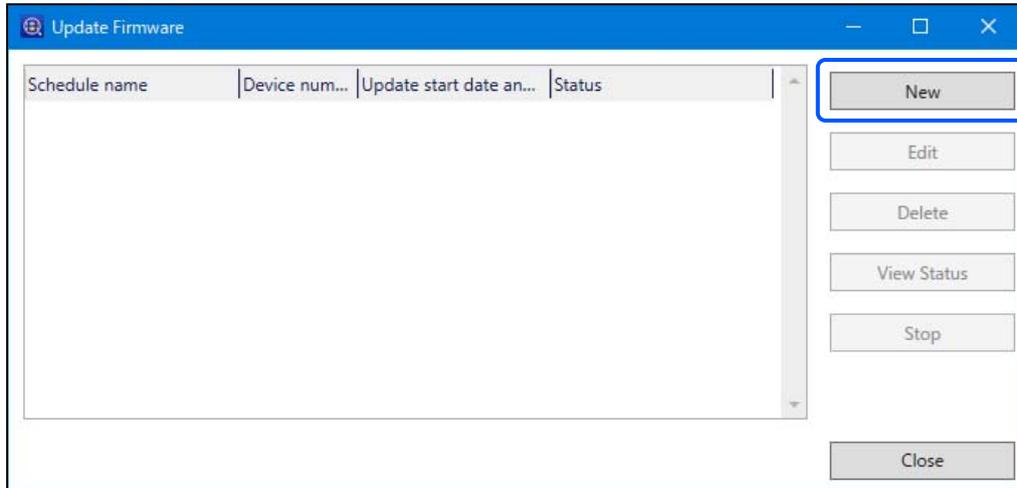

5. Check Cautions on updating firmware, and then click **Next**.

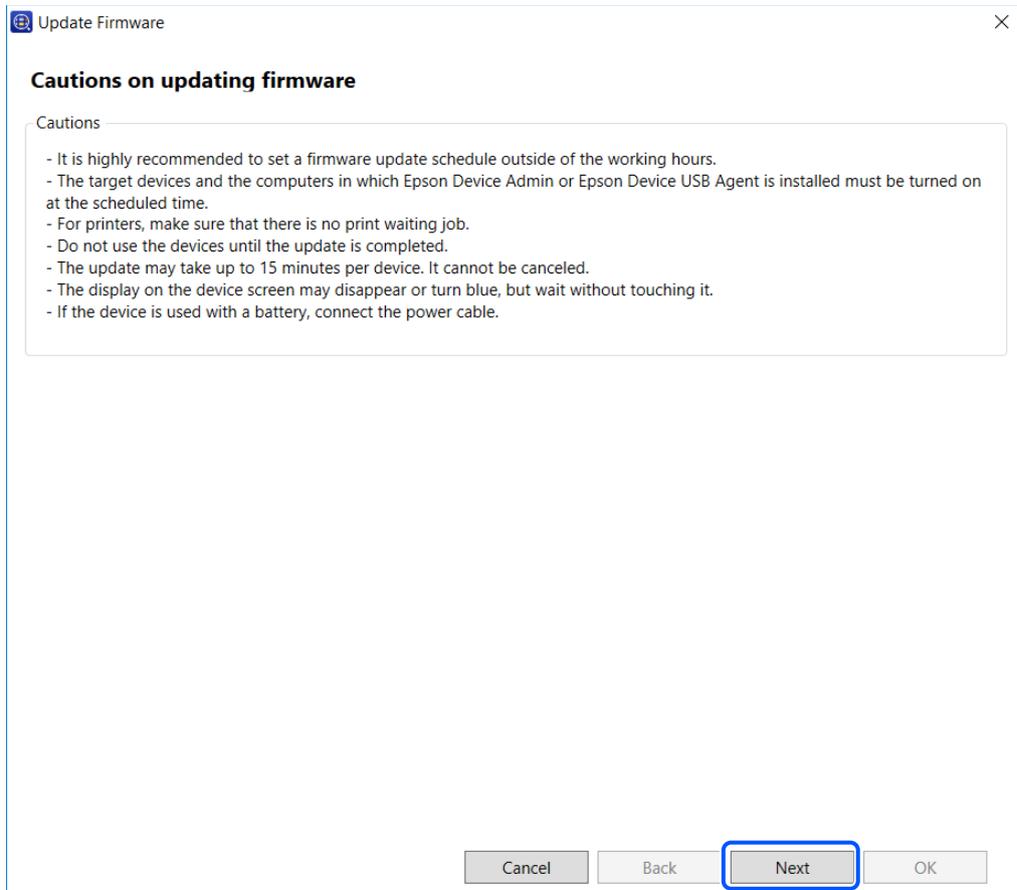

6. Specify where the firmware is stored.

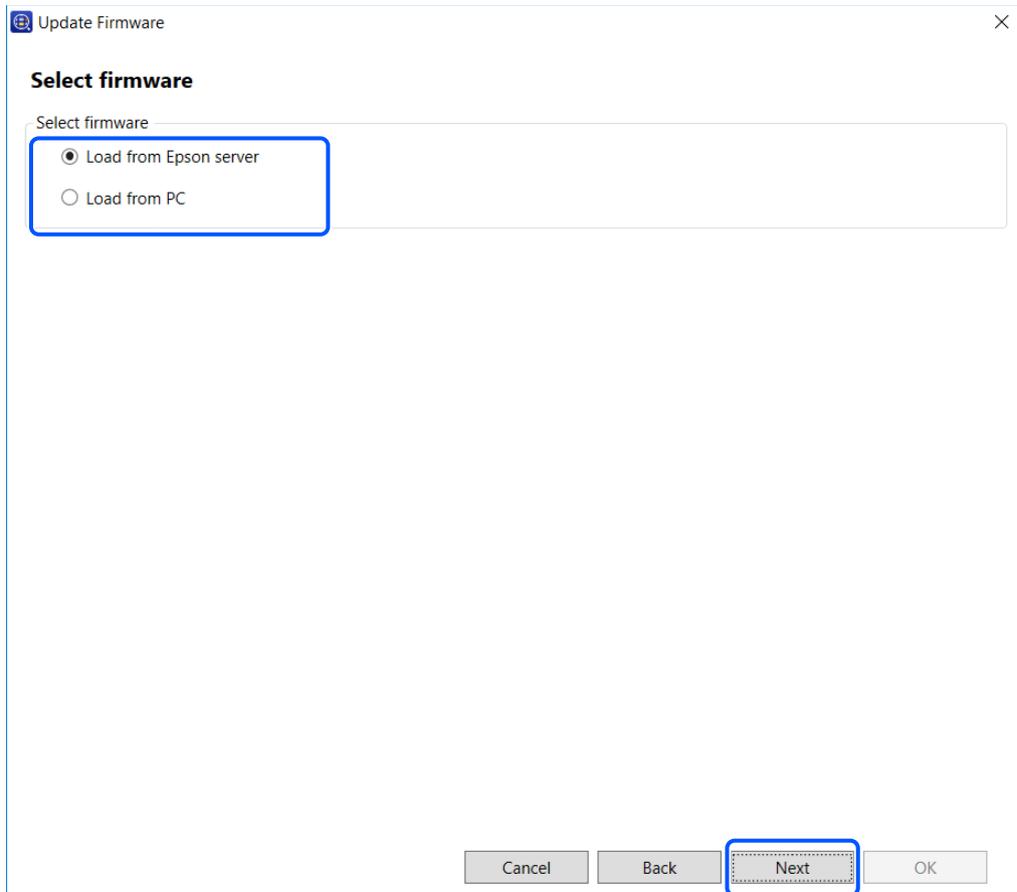

Load from Epson server

Updates by downloading the latest version firmware from the Epson server.

Load from PC

Updates using the firmware file that you specified.

7. Click **Next**.

8. Select the devices with firmware that you want to update.


You can select the group to which devices are registered from the select group menu.

Target devices are listed in the box on the right. To change these, move devices by using >, >>, <, and <<.

You can move selected devices by using >, <, and all devices by using >>, <<.

Note:

In the list, the **Certificate** column displays the status of the device's certificate. If **Unconfirmed** is displayed in the **Certificate** column, you cannot move the device to the right.

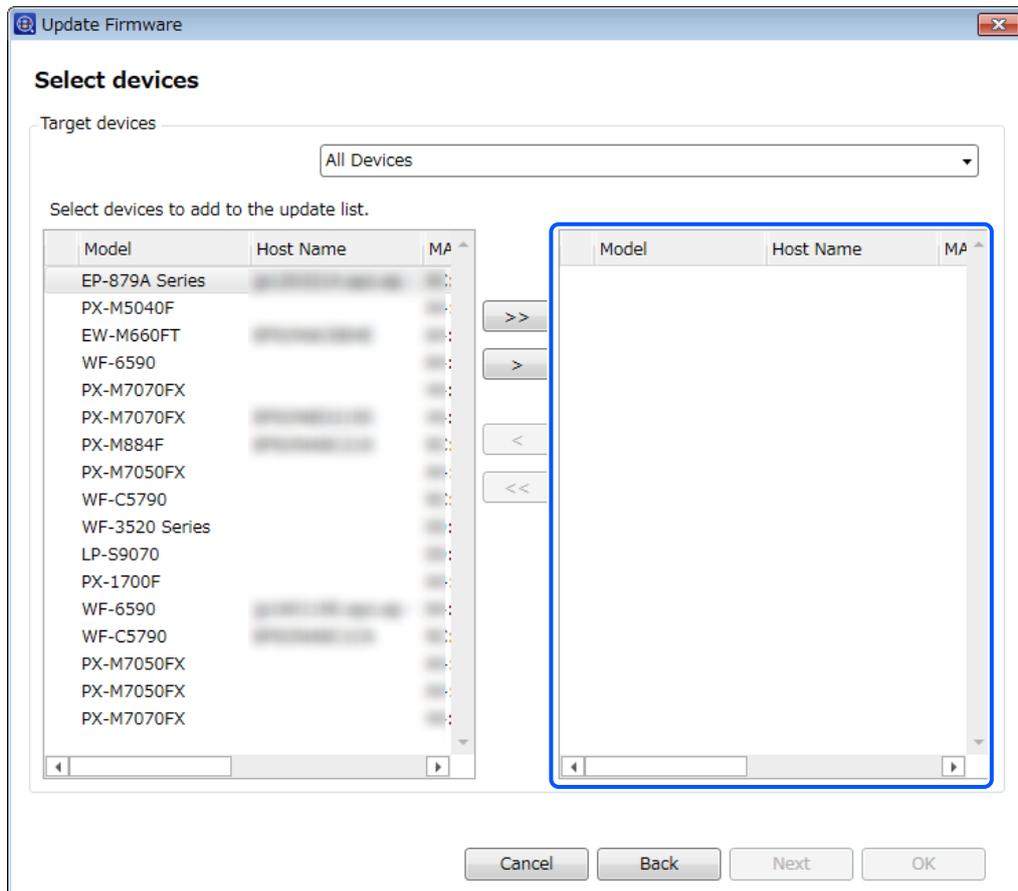


9. Click **Next**.

The firmware is downloaded.


Note:

If the **Certificate** column contains a device that is listed as **Untrusted certificate**, the connection is not secure. A message is displayed. Check the content of the message displayed and take the appropriate action.

10. Check the download result for each device in **Status**, and then click **Next**.

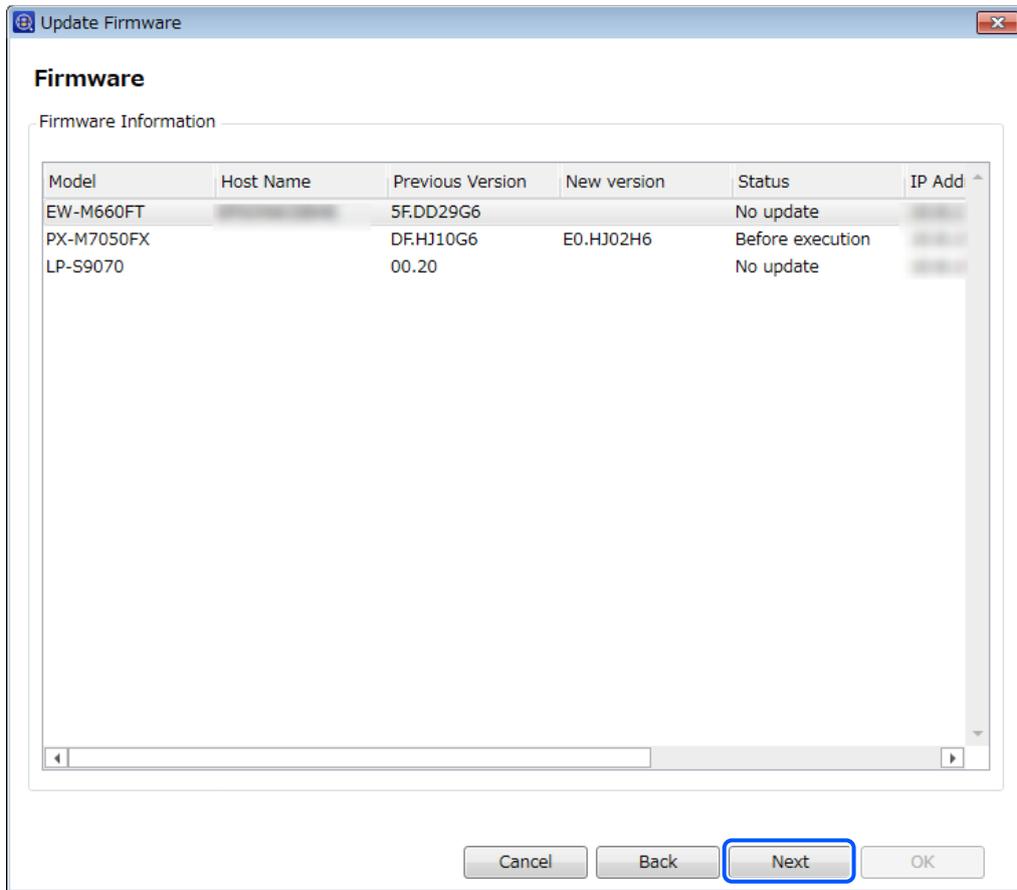

11. Check the license agreements of the firmware for each device, select **I agree with the license agreement**, and then click **Next**.

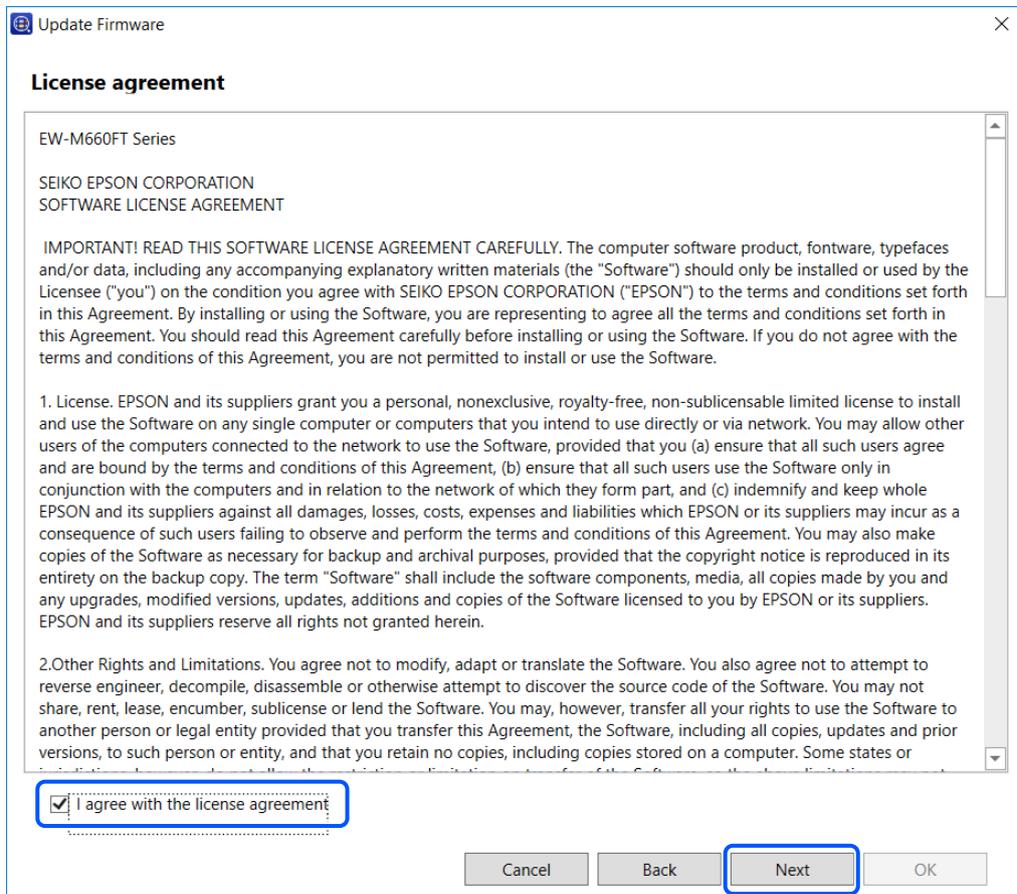

12. Specify a schedule.

See the following to make the setting.

Item	Explanation
Schedule name	Enter the name for the firmware update schedule (up to 255 characters in Unicode without control characters).
Update start date and time	<p>Sets when the schedule starts.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Start immediately Click OK to save the schedule and start updating. <input type="checkbox"/> Set the schedule start date Sets the date and time to start the schedule. You can set the time in minute. <input type="checkbox"/> Specify the day of the week, date, and time You can specify the schedule by days of the week and set the start date and time.

13. Click **OK**.


The firmware update schedule is created and saved.

When **Start immediately** is selected for **Update start date and time**, the firmware update starts.

Editing firmware update schedules

You can change and delete firmware update schedules.

1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Click **Update**.
Firmware updates screen is displayed.
4. Select the schedule that you want to edit, and then make settings using the screen displayed.

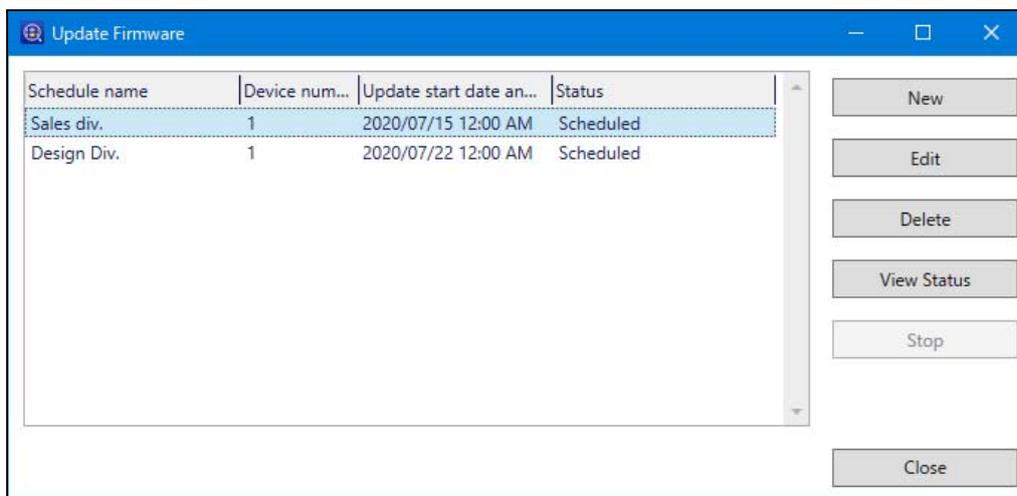

Change: **Edit**

The firmware update schedule Wizard is displayed. Change the settings using the Wizard.

Delete: **Delete**

Displays the delete confirmation screen. To delete the schedule, click **Yes**.


Checking the Status of Firmware Update Schedules

You can check the status of the firmware update schedule for each device.

1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Click **Update**.
Firmware updates screen is displayed.

- Select the firmware update schedule that the device you want to check the status is registered, and then click **View Status**.

View Status screen is displayed.

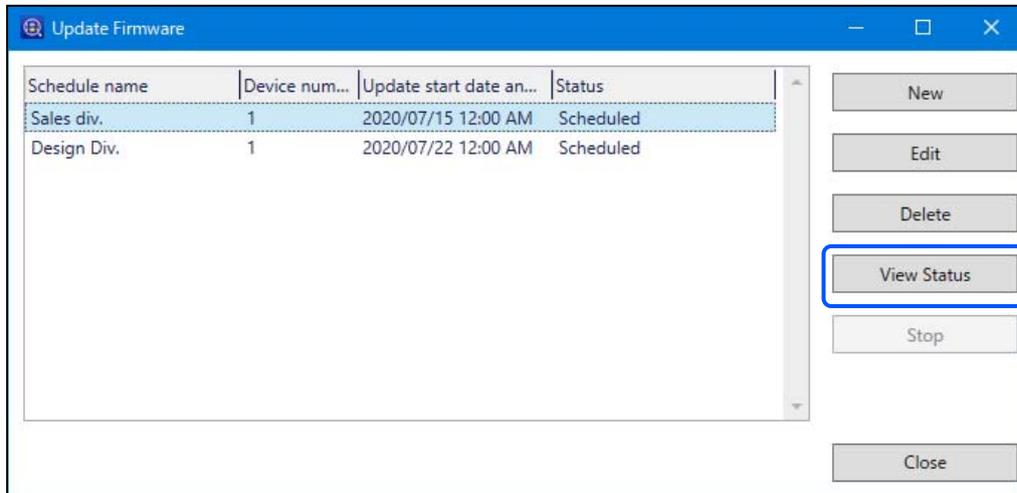

- Check the information displayed in the device list.

The following information is displayed.

- Model
- Host Name
- Before update
- After update
- Status
- IP Address
- MAC Address
- Serial Number

- Click **OK** to close the screen.

Exporting firmware update results

If the status of an update schedule is **Successful**, **Successful (including corrections)**, or **Failed**, you can export the update results to a CSV file.

- Select the schedule for which you want to save the CSV containing the update results.
- Click **CSV Export**.
- Select the destination to save the CSV file, and then click **OK**.
- Click **OK** on the export completion screen.

The CSV file is saved in the specified location.

The information saved is as follows:

- Model Name

- Serial Number
- Status
- Host Name
- Before update
- After update
- IP Address
- MAC Address

Daily Management

This chapter explains how to make preparations for daily management.

When you have set schedules for acquiring device information and alert notifications, this software collects device information and monitors devices automatically, and then sends you a notification if a problem occurs.

By making report settings, since this software collects device data for specified periods, you can check the frequency the device is used and the status of consumables.

Managing the Device List

Collecting information regularly

You can update device information regularly by using Auto Refresh.


Note:

*When **Regular Device Discovery** is enabled, the **Auto-Update** function of device information is disabled.*

Schedule settings

Set the time interval for regularly collecting information.

1. Select **Devices** on the side bar task menu.
2. Click **Options** on the **Home** tab on the ribbon menu.
3. Click **Timing**.
4. Set the interval to collect information.

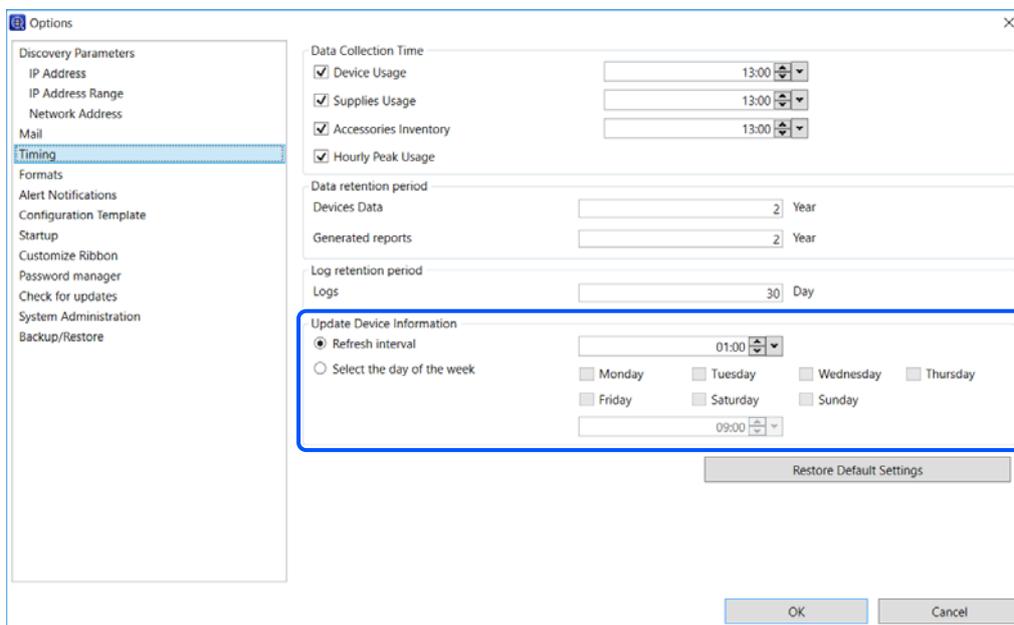

Refresh interval

Collects device information at regular intervals after starting Auto Update.

You can set the interval in units of one minute from 1 minute to 23 hours 59 minutes.

Select the day(s) of the week

Collects device information on a specified day and time.

You can specify Monday through Sunday, and the time in minutes.

5. Click **OK**.

Starting Auto Update

Start Auto Update.

1. Select **Devices** on the side bar task menu.
2. Click **Auto-Update** on the **Home** tab on the ribbon menu.

Auto Refresh is started.

Note:

- You can cancel data collection using a schedule by clicking the  icon at the bottom-right of the screen. The schedule settings are canceled at the same time.
- You cannot use this function if **Regular Device Discovery** is enabled.

Displaying the device list settings

You can customize the display for the device list.

The following customizations are available.

Display presets

Frequently used presets are provided by default.

You can also save the current display as a preset.

Edit columns

You can edit columns, and display only those columns you need.

Filtering

You can filter target devices by filtering the column displayed using a character string.

Display presets



You can switch the display by using the menu on the **View** tab on the ribbon menu on device management screen.

Icon	Explanation
Basic View	Displays the default presets.
Default, Supplies, Counts	Default settings view. Displays consumables and the number of prints.
User defined	Displays registered preset in a pull-down menu.


Registering a preset

You can register the items for the current device list as a preset. You can register up to 256 items.

1. Select **Devices** on the side bar task menu.
2. Convert the display of the device list to the display registered as preset.
3. Click **Add as Preset** on the **View** tab on the ribbon menu.



4. Enter the name of the preset, and then click **OK**.
Enter up to 255 characters in Unicode.

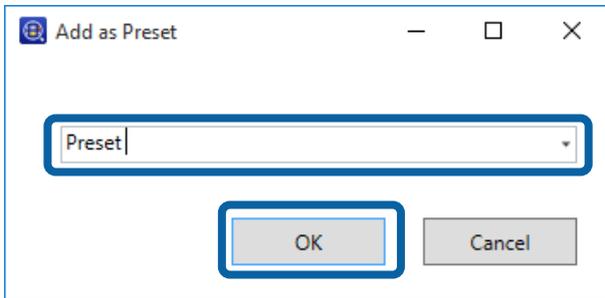

Note:

You can select the name of an existing preset, and overwrite the settings by clicking **OK** on the confirmation screen.


Editing presets

You can change or delete the name of a registered preset or set the default preset.

1. Select **Devices** on the side bar task menu.
2. Click **Edit Preset** on the **View** tab on the ribbon menu.



- Use the buttons to change the preset settings.

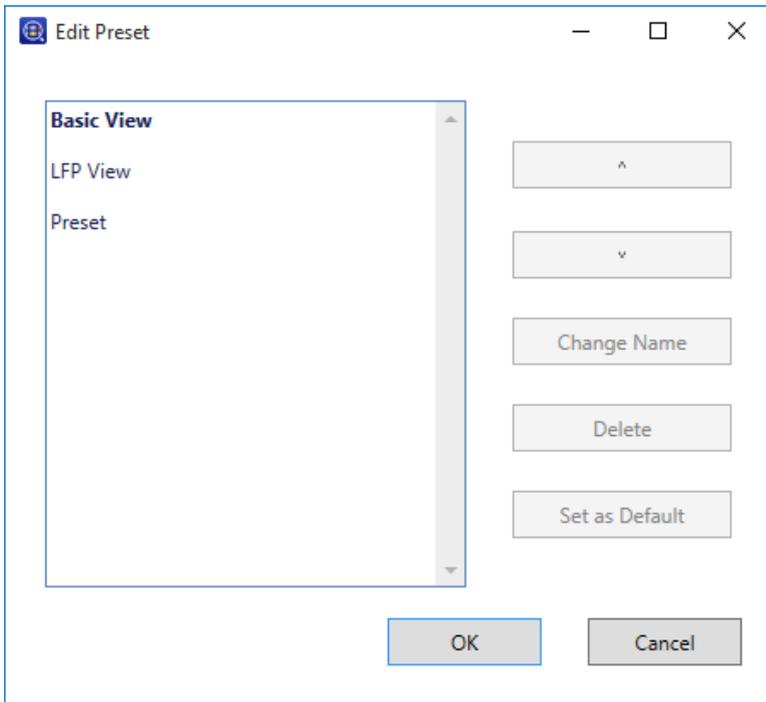

See the following to make the settings.

Item	Explanation
Definition view list	Displays user-defined presets. The default preset is displayed in bold.
^, v	Moves the selected preset to up or down the list.
Change Name	Changes the name of the selected preset.
Delete	Deletes the selected preset.
Set as Default	Sets the selected preset as the default. This is assigned to the Default button on the ribbon menu.

- Click **OK**.

Editing columns

You can change the way columns are displayed in the device list.


- Select **Devices** on the side bar task menu.
- Click **Edit Column** on the **View** tab on the ribbon menu.



3. Use the buttons to change the preset settings.

The item **Selected column(s)** is displayed in the device list.

You can add the amount of remaining consumables, the number of times consumables have been replaced, and the number and type of printed pages (A4, A3, Color, B&W).

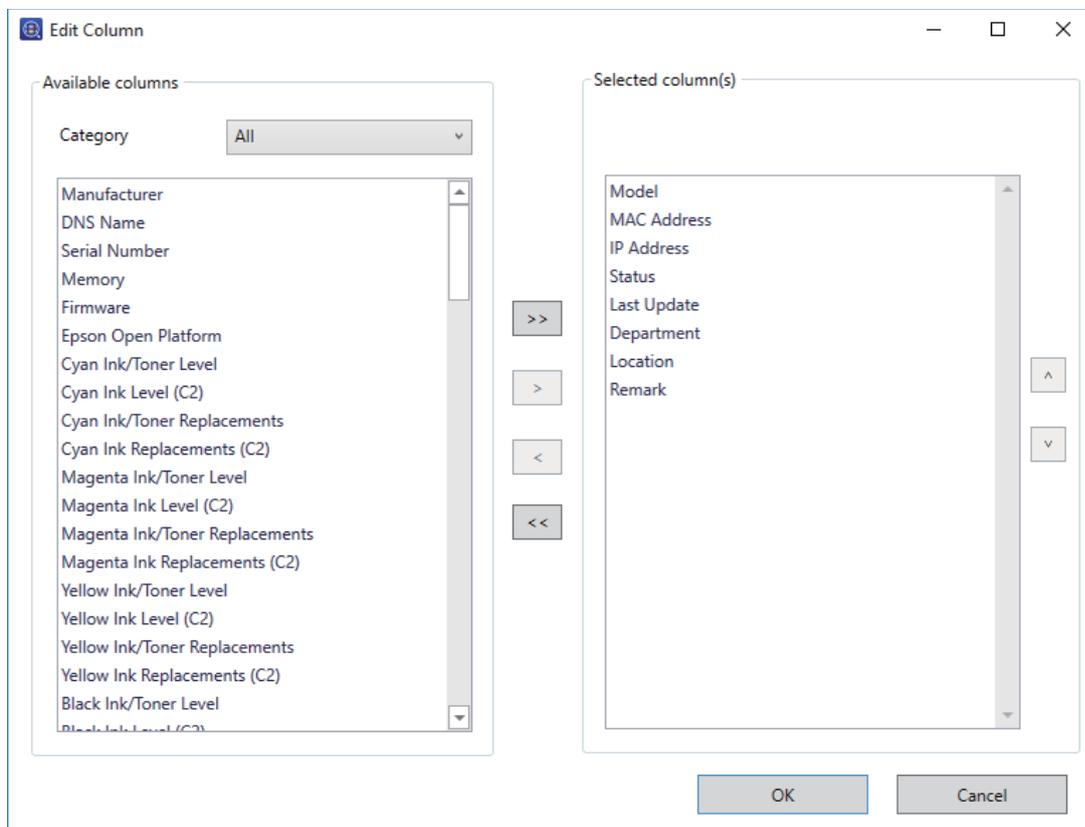

Note:

The actual display items may differ depending on the device being used.

- The number of prints contains paper jams, print mistakes, and status sheets.
- Depending on the timing for data collection, there may be errors in the total number of prints.
- The amount of ink remaining and replacement times are displayed in Gray for Dark Gray and in Light Gray for Light Gray depending on the device being used.
- The remaining amount of consumables is approximate.
- For ink injection devices, the amount of ink remaining and the ink replacement times are displayed as numbers when performing operations as explained in the manual.
- Ink and toner with the same color are displayed in the same item.
- Ink for devices with sets of two colors that are the same is displayed as (C1) and (C2).

Item	Explanation
Category	Select the category for basic information and consumables for items displayed in Available columns .
>, <	Moves the selected item to the column on the left or right.
^, v	Moves the position the item is displayed up or down the list.


4. Click **OK**.

Using filters

By entering keywords in the **Search Filter** text box on the ribbon menu, you can display devices containing the same character string in the device list.

Enter up to 255 characters in Unicode. The software does not distinguish between upper and lower case characters.

To cancel the filter, delete the character string from the text box.

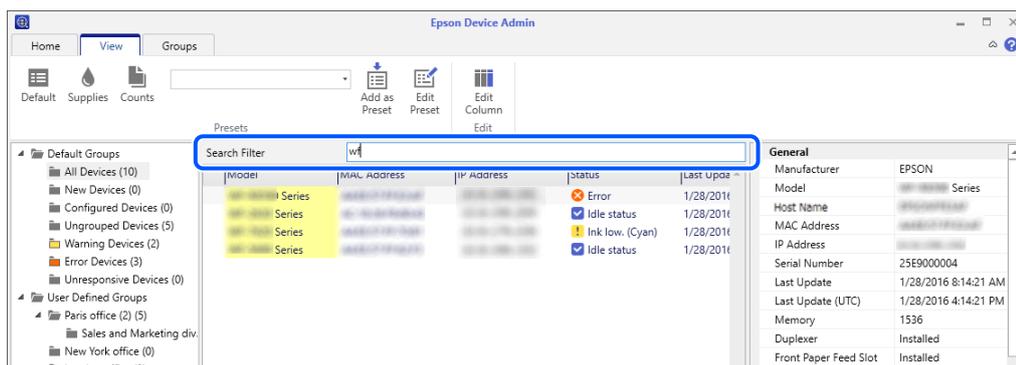

Managing Alerts

You can monitor alerts from devices and send notifications to set email addresses depending on the type of alert.

To use the alert feature, set the type of alert and the email recipient, and then connect it to the group of devices to be monitored.

Note:

Use this feature when selecting features during software installation. If it is not already installed, you can set it from the Windows Control Panel. See the related information link below for details.

Related Information

➔ [“Changing features and uninstalling” on page 14](#)

Creating alerts

You can create alerts based on the alert type and email address.

You can create it up to 10,000 items.

1. Select **Alerts** on the side bar task menu.
2. Click **New** on the ribbon menu.



3. Enter the items.

See the following to make the settings.

Item	Explanation
Alert Name	The name of the alert displayed on the alert list. Enter up to 1,024 characters in Unicode.

Item	Explanation
Alert Type	<p>Set the conditions for sending an alert notification. You can select from the following.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Paper jam <input type="checkbox"/> Paper out <input type="checkbox"/> Supplies level low <input type="checkbox"/> Supplies level warning <input type="checkbox"/> Cover open (For printers only) <input type="checkbox"/> Tray Full <input type="checkbox"/> Service call problem <input type="checkbox"/> (Scanner) Glass Dirt <input type="checkbox"/> (Scanner) Regular Cleaning <input type="checkbox"/> (Scanner) Double Feed <input type="checkbox"/> (Scanner) Sensor Dirt <input type="checkbox"/> (Scanner) Paper Protection <input type="checkbox"/> (Check Scanner) Regular Cleaning Notification <input type="checkbox"/> Other
To	<p>Enter the email address to which alert notifications are sent.</p> <p>When entering multiple addresses, separate the addresses with semi-colons (;). You can enter up to 32,767 bytes including [;]. Enter all addresses in the [TO] field. You cannot use the [CC] or [BCC] fields.</p> <p>You can select and insert multiple addresses that you have entered previously by clicking Select from History.</p>
Subject	<p>The subject of the alert notification email. You can enter up to 256 characters.</p>
Message	<p>The text of the alert notification email. You can enter up to 64K bytes.</p>
Default Notification E-mail Retransmission Interval of the Same Alert	<p>Select the time until the next time the alert notification email is sent if the alert has not been cleared on the device.</p> <p>Select from following.</p> <p>Use Default, 5 minutes, 10 minutes, 30 minutes, 1 hour, 3 hours, 6 hours, 12 hours, 1 day, 2 days, 3 days, 4 days, 5 days, 1 week, Never</p> <p>When selecting Use Default, the time set in Default Notification E-mail Retransmission Interval of the Same Alert in Options > Alert Notifications is applied.</p>

- Click **OK** to save the alert and close the screen. Click **Assign/Remove Group(s)** to set monitored groups using the created alert.

When you click **OK**, the alert is created and added to the alert list.

When you click **Assign/Remove Group(s)**, you can add groups to be monitored by alerts. See the following for details.


Adding groups monitored by alerts

You can set monitored groups with the created alert. This sends notifications when an alert is generated on a device in the group.

1. Select **Alerts** on the side bar task menu.
2. Selects alert from the alert list.
You cannot add monitoring groups when selecting multiple templates.
3. Click **Assign/Remove Group(s)** on the ribbon menu.



4. Select the group you want to monitor, and then click > to move it to **Subscribed Group(s)**.
When you move a group to **Unsubscribed group(s)** by clicking <, alert monitoring is canceled.

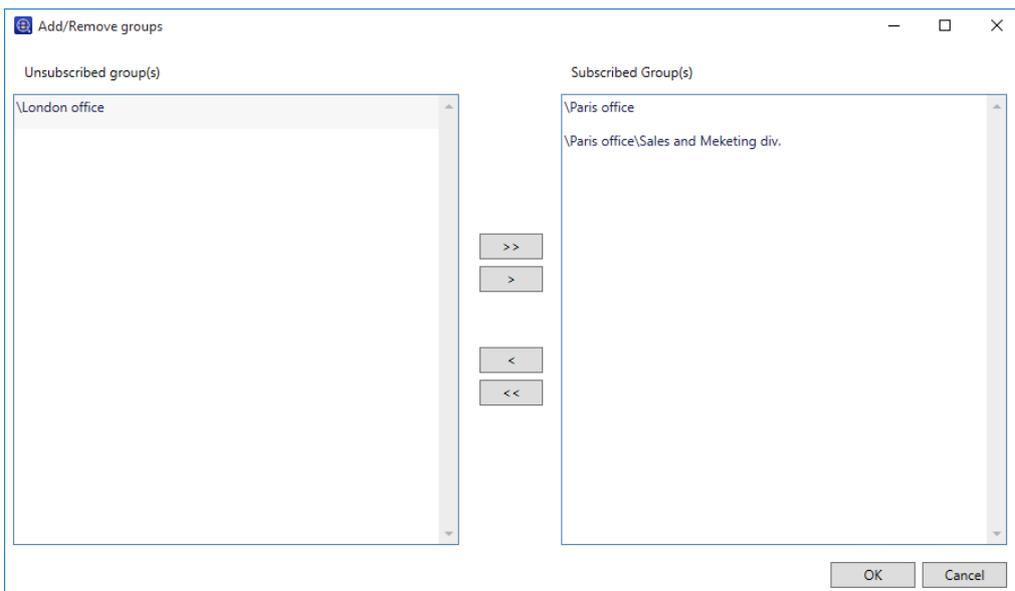

5. Click **OK**.
Alert monitoring for devices in the selected group begins.
Note:
You can set multiple alerts for one group. Add the alerts to each monitoring group.

Setting the alert confirmation interval

You can set the interval to check alerts from the device.


1. Select **Devices** on the side bar task menu.

2. Click **Options** on the **Home** tab on the ribbon menu.



3. Select **Alert Notifications**.

4. Set the interval to check for alerts.

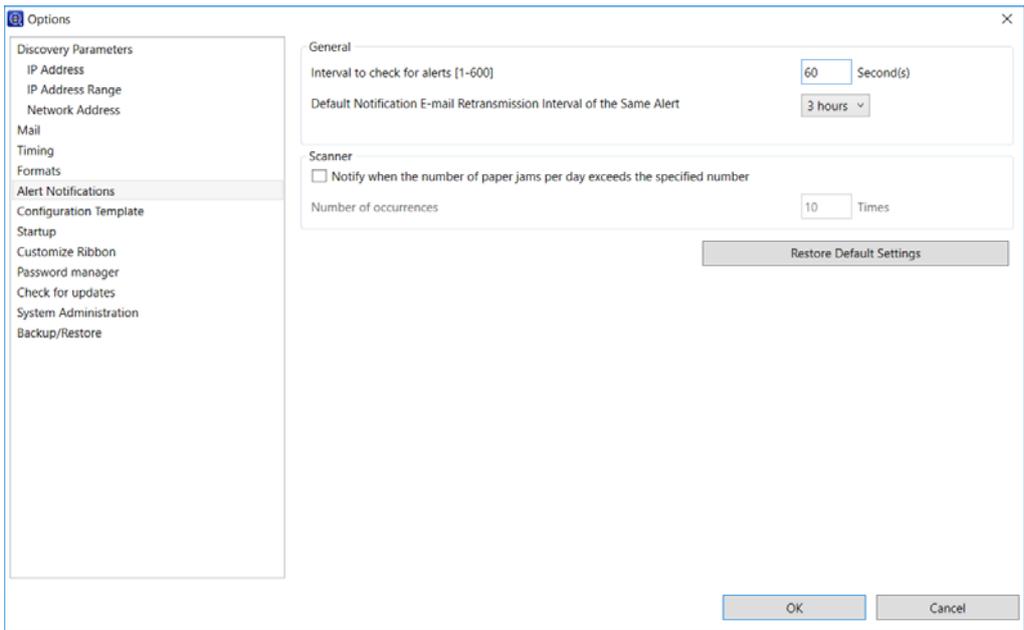

See the following to make the settings.

Item	Explanation
Interval to check for alerts [1-600]	Set the interval to check for alerts on devices. Enter 1 to 600 seconds in intervals of 1 second.
Notification email resend interval	Sets the time to resend a notification email that an alert has occurred if the alert is not cleared from a device. Select from the following. 5 minutes/10 minutes/30 minutes/1 hour/3 hours/6 hours/12 hours/1 day/2 days/3 days/4 days/5 days/1 week/Never
Notify when the number of paper jams per day exceeds the specified number	Sends a notification when the number of paper jams on the scanner in one day (from 0:00 to 23:59) is the same as the specified number.
Number of occurrences	Sends a notification if the set number of paper jams that occurs in one day exceeds the specified number of times. Enter 1 to 99 times in intervals of 1.

Editing alerts

You can change, duplicate, and delete alerts you created.

1. Select **Alerts** on the side bar task menu.
2. Select an alert from the alert list.
You can only select multiple alerts when deleting.
3. Set using the screen displayed when you click the button on the ribbon menu.




- Change: **Edit**
Displays the alert screen. Change the settings, and then click **OK**.
- Copy : **Duplicate**
Displays the alert name screen. Enter a new name, and then click **OK**.
- Delete : **Delete**
Displays the delete confirmation screen. To delete the alert, click **OK**.

Switching the alert display

You can switch the alert list and the log screen when clicking the item in the tree view.

The number next to the item name is the number of alerts in the item.

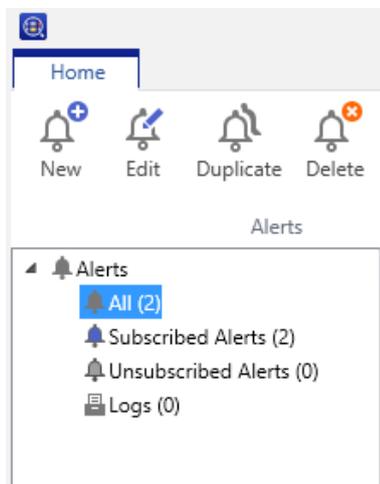

Alert list

Displays a list of alerts at the top.

Displays content for the selected alert and the monitored device group at the bottom.

- All
Displays all alerts.
- Subscribed Alerts
Displays alerts that have been subscribed to at least one group.

Unsubscribed Alerts

Displays alerts that have not been subscribed to any groups.

Log

When you select **Logs** from the tree view, a log of alert notifications are displayed at the top, and detailed content is displayed at the bottom.

You can set the time to save logs in **Log retention period** from **Options > Timing**.

Report Management

Report management allows you to output the status of devices, consumables, and accessories as a report.

Available file formats for the report are PDF, HTML, and CSV.

You can create reports by using the Wizard.

Note:

- Use this feature when selecting features during software installation. If it is not already installed, you can set it from the Windows Control Panel. See the related information link below for details.
- If your computer is set to daylight saving time, errors may be generated during data collection and timed intervals for reports.

Related Information


➔ [“Changing features and uninstalling” on page 14](#)

Creating reports

You can create reports for target device groups using the conditions for the selected report format. You can create the report by specifying a period or setting a regular schedule. Create device groups before creating reports.

See the related information link below for details.

1. Select **Reports** on the side bar task menu.
2. Select **User Defined Report > Scheduled Reports** from the tree view.

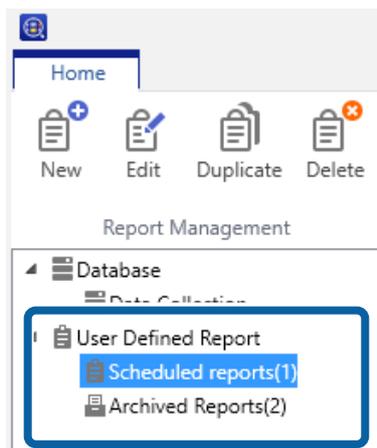

3. Click **New** on the ribbon menu.

The report creation Wizard is displayed.




4. Set conditions when acquiring report data.

Select from the following.


Device Usage / Hourly Peak Usage / Supply Usage / Accessory Inventory

The following items are displayed when **Manage the Epson Print Admin Serverless / Authentication compatible devices** is selected from **Options > Epson Print Admin Serverless / Authentication Settings**.

- Epson Print Admin Serverless - Usage Per User**
- Epson Print Admin Serverless - Usage Per Department**
- Epson Print Admin Serverless - Job History**
- Authentication Settings - Job History**

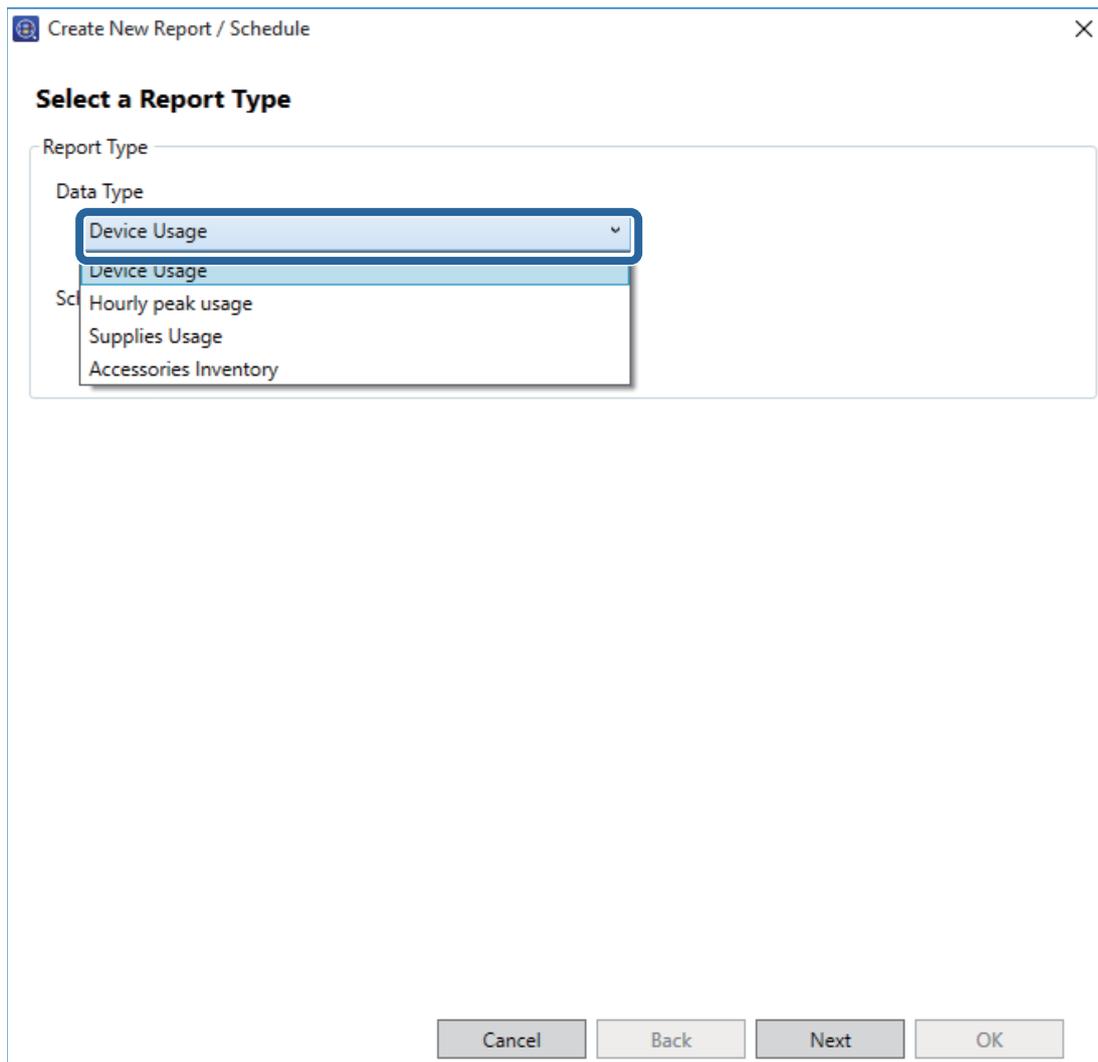


5. Select the conditions used to create a report by specifying the period or setting a schedule.
 Create report by specifying a period: Clear the **Create a Schedule** check box.
 Create report by setting the schedule: Select the **Create a Schedule** check box.
6. Click **Next**.
7. Select the target device group.
 Target groups are listed in the box on the right. To change these, move groups by using >, >>, <, and <<.
 You can move selected groups by using >, <, and all groups by using >>, <<.
 Select **Include child group(s)** to automatically select child groups within the selected group.

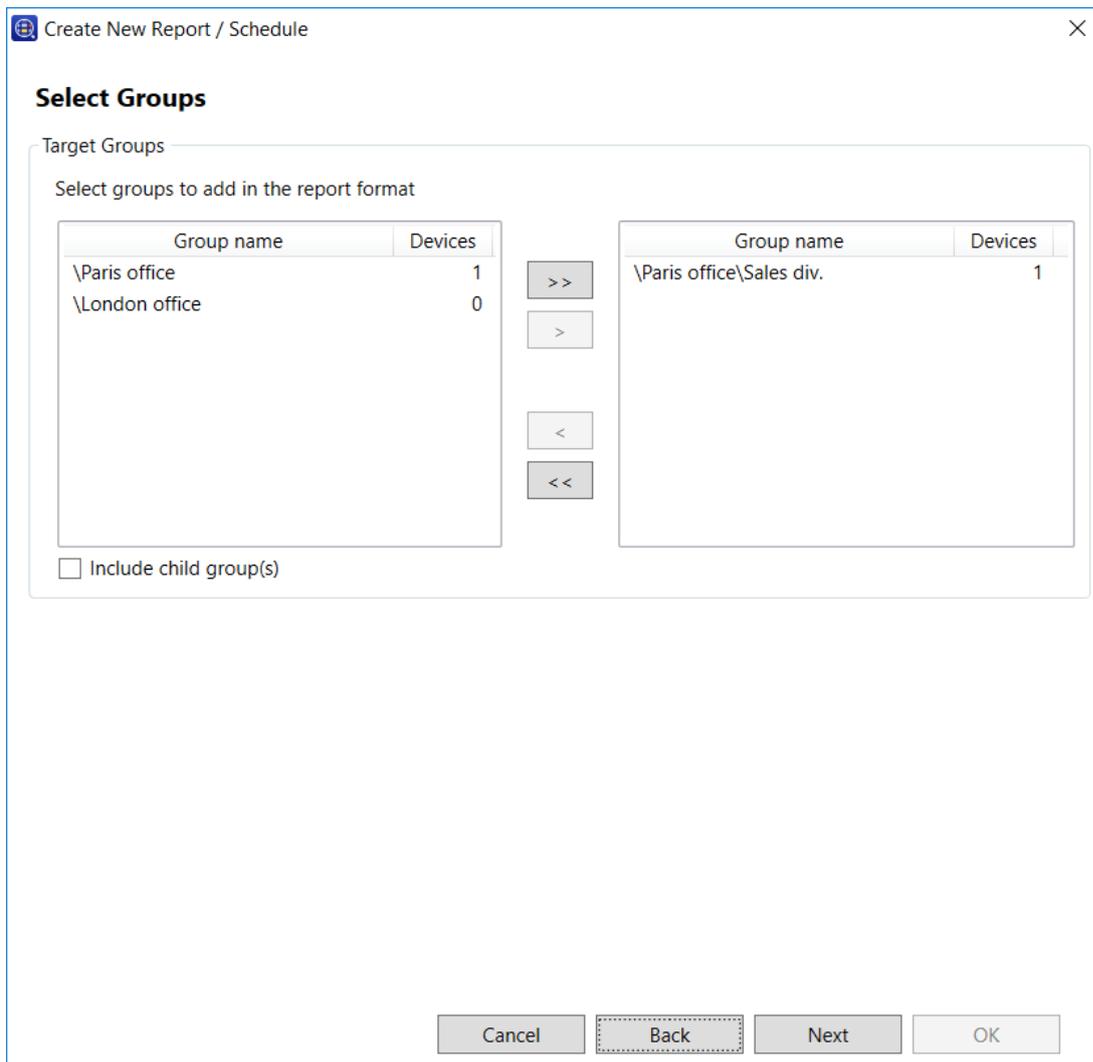

8. Click **Next**.
9. Specify the report format.
 This screen is not displayed when the following items are selected in step 4. Go to step 11.
 - Epson Print Admin Serverless - Usage Per User
 - Epson Print Admin Serverless - Usage Per Department
 - Epson Print Admin Serverless - Job History

❑ Authentication Settings - Job History

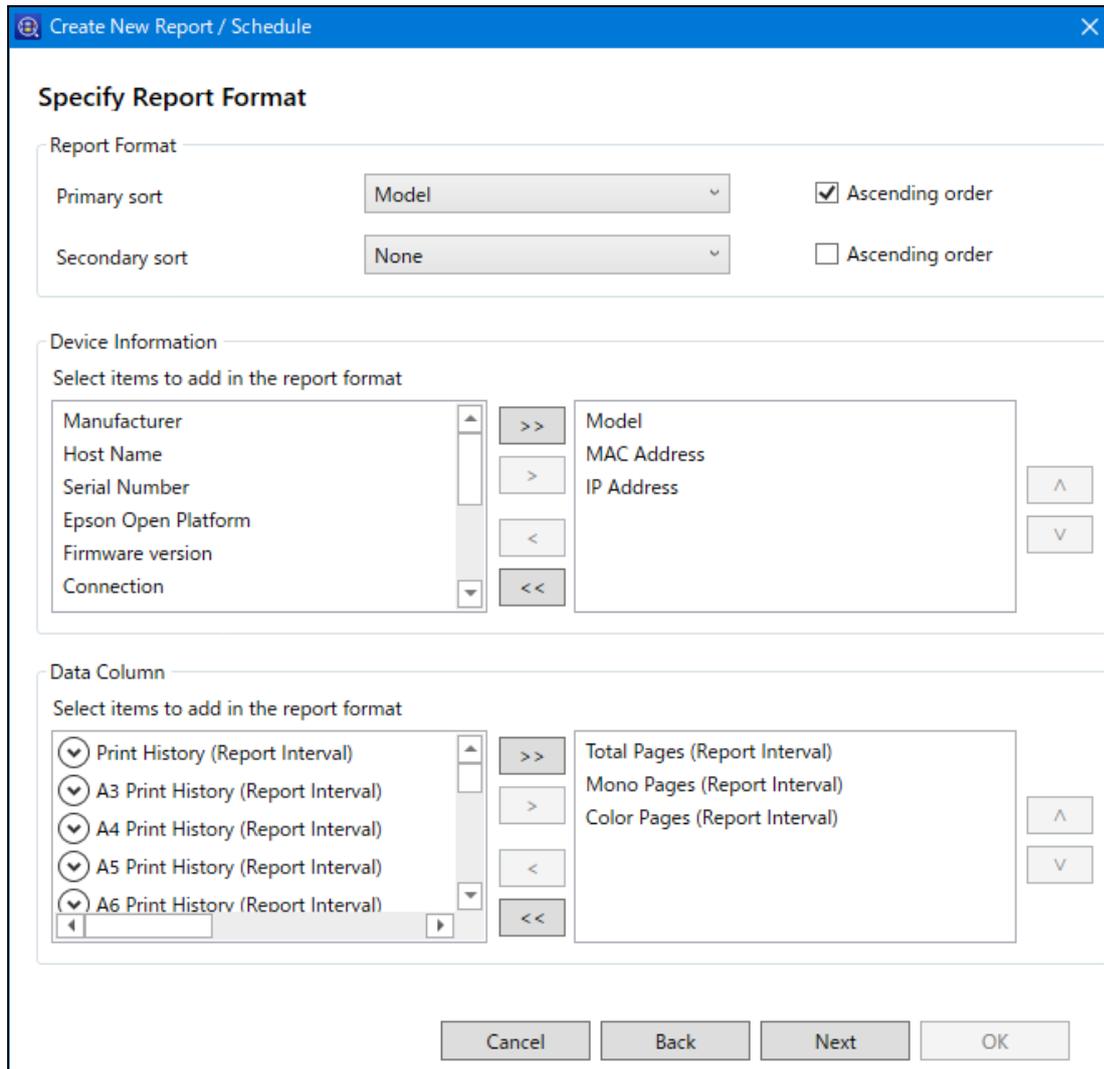

See the following to make the settings.

Item	Explanation
Primary sort	Select the key given first priority when sorting reports using device information items.
Secondary sort	Select the key given second priority when sorting reports using device information items. Available items are the same as for Primary sort .
Device Information	Select the device information items to be included in the report.
Data Column	Select the collection data to be included in the report. See the following table for the available items.

Available items for collection conditions

Item	Explanation	
<p>Device Usage (Printer)</p> <p>Note: <i>The total page count in the report may differ from the actual total page count due to the timing for data collection.</i></p>	<p>Print History</p> <p>You can select information for compatible paper sizes.</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Total print pages (All-time): The total number of pages printed from the time you start using the printer are tracked by the printer engine. This number is not only tracked during the report range, but also in periods out of the report range. <input type="checkbox"/> Total mono print pages (All-time): The total number of black-and-white pages printed from the time you start using the printer are tracked by the printer engine. This number is not only tracked during the report range, but also in periods out of the report range. <input type="checkbox"/> Total color print pages (All-time): The total number of color pages printed from the time you start using the printer are tracked by the printer engine. This number is not only tracked during the report range, but also in periods out of the report range. <input type="checkbox"/> Total Pages (Report Interval): The total number of pages printed are tracked by the printer engine. <input type="checkbox"/> Mono Pages (Report Interval): The total number of black-and-white pages printed are tracked by the printer engine. <input type="checkbox"/> Color Pages (Report Interval): The total number of color pages printed are tracked by the printer engine.
		<ul style="list-style-type: none"> <input type="checkbox"/> 1-Sided Pages (Report Interval/All-time): The total number of simplex pages printed are tracked by the printer engine. <input type="checkbox"/> 2-Sided Pages (Report Interval/All-time): The total number of duplex pages printed are tracked by the printer engine. <input type="checkbox"/> 1-Sided Mono Pages (Report Interval/All-time): The total number of simplex black-and-white pages printed are tracked by the printer engine. <input type="checkbox"/> 1-Sided Color Pages (Report Interval/All-time): The total number of simplex color pages printed are tracked by the printer engine. <input type="checkbox"/> 2-Sided Mono Pages (Report Interval/All-time): The total number of duplex black-and-white pages printed are tracked by the printer engine. <input type="checkbox"/> 2-Sided Color Pages (Report Interval/All-time): The total number of duplex color pages printed are tracked by the printer engine. <input type="checkbox"/> Total Prints (m) LFP only (Report Interval/All-time): The total printed length is calculated by the printer engine (m). <input type="checkbox"/> Total Prints (m2) LFP only (Report Interval/All-time): The total printed area is calculated by the printer engine (m2). <input type="checkbox"/> Total Lines (Report Interval/All-time): The total number of lines printed by the printer engine.

Item	Explanation	
<p>Device Usage (Printer)</p> <p>Note: <i>The total page count in the report may differ from the actual total page count due to the timing for data collection.</i></p>	<p>Pages by Function (Printer)</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Pages by Function (Printer)/Pages by Function (Copy)/Pages by Function (FAX)/Pages by Function (Other) (Report Interval/All-time): The total number of pages printed is tracked by the printer engine for each function. <input type="checkbox"/> Mono Pages by Function (Print)/Mono Pages by Function (Copy)/Mono Pages by Function (Fax)/Mono Pages by Function (Others) (Report Interval/All-time): The total number of black-and-white pages printed is tracked by the printer engine for each function. <input type="checkbox"/> Color Pages by Function (Print)/Color Pages by Function (Copy)/Color Pages by Function (Fax)/Color Pages by Function (Others) (Report Interval/All-time): The total number of color pages printed is tracked by the printer engine for each function.
	<p>Pages by Interface (Standard Network)</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Total Pages by Interface (Standard Network)/Total Pages by Interface (Additional Network)/Total Pages by Interface (Other) (Report Interval/All-time): The total number of printed pages by interface. <input type="checkbox"/> Mono Pages by Interface (Standard Network)/ Mono Pages by Interface (Additional Network)/Mono Pages by Interface (Other) (Report Interval/All-time): The number of monochrome pages printed by interface. <input type="checkbox"/> Color Pages by Interface (Standard Network)/Color Pages by Interface (Additional Network)/Color Pages by Interface (Other) (Report Interval/All-time): The total number of color pages printed by interface.
	<p>Total Number of Cartridges Sorted by Interface</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Total Pages by Interface (Standard Network)/Total Pages by Interface (Additional Network)/Total Pages by Interface (Other) (C, M, Y, K) (Report Interval/All-time): The total number of toner cartridges consumed during printing by interface.

Item	Explanation	
<p>Device Usage (Scanner)</p> <p>Note: <i>The total page count in the report may differ from the actual total page count due to the timing for data collection.</i></p>	Scan History	<p>You can select information for compatible paper sizes.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Total Scan Sheets/Total Scan Pages (Report Interval/All-time): The total number of sheets/pages scanned are tracked by the scanner engine. <input type="checkbox"/> Mono Total Scan Sheets/Mono Total Scan Pages (Report Interval/All-time): The total number of black-and-white pages scanned are tracked by the scanner engine. <input type="checkbox"/> Color Total Scan Sheets/Color Total Scan Pages (Report Interval/All-time): The total number of color pages scanned are tracked by the scanner engine. <input type="checkbox"/> 1-Sided Total Scan Sheets/1-Sided Total Scan Pages (Report Interval/All-time): The total number of simplex pages scanned are tracked by the scanner engine. <input type="checkbox"/> 2-Sided Total Scan Sheets/2-Sided Total Scan Pages (Report Interval/All-time): The total number of duplex pages scanned are tracked by the scanner engine.
	ADF Scan History	<ul style="list-style-type: none"> <input type="checkbox"/> ADF Total Scan Sheets/ADF Total Scan Pages (Report Interval/All-time): The total number of sheets/pages scanned using the ADF are tracked by the scanner engine. <input type="checkbox"/> ADF Mono Total Scan Sheets/ADF Mono Total Scan Pages (Report Interval/All-time): The total number of black-and-white sheets/pages scanned using the ADF are tracked by the scanner engine. <input type="checkbox"/> ADF Color Total Scan Sheets/ADF Color Total Scan Pages (Report Interval/All-time): The total number of color sheets/pages scanned using the ADF are tracked by the scanner engine. <input type="checkbox"/> ADF 1-Sided Total Scan Sheets/ADF 1-Sided Total Scan Pages (Report Interval/All-time): The total number of simplex sheets/pages scanned using the ADF are tracked by the scanner engine. <input type="checkbox"/> ADF 2-Sided Total Scan Sheets/ADF 2-Sided Total Scan Pages (Report Interval/All-time): The total number of duplex sheets/pages scanned using the ADF are tracked by the scanner engine.

Item	Explanation	
<p>Device Usage (Scanner)</p> <p>Note: The total page count in the report may differ from the actual total page count due to the timing for data collection.</p>	<p>FB Scan History</p>	<ul style="list-style-type: none"> <input type="checkbox"/> FB Total Scan Sheets/FB Total Scan Pages (Report Interval/All-time): The total number of sheets/pages scanned on the FB are tracked by the scanner engine. <input type="checkbox"/> FB Mono Total Scan Sheets/FB Mono Total Scan Pages (Report Interval/All-time): The total number of black-and-white sheets/pages scanned on the FB are tracked by the scanner engine. <input type="checkbox"/> FB Color Total Scan Sheets/FB Color Total Scan Pages (Report Interval/All-time): The total number of color sheets/pages scanned on the FB are tracked by the scanner engine.
	<p>SF Scan History</p>	<ul style="list-style-type: none"> <input type="checkbox"/> SF Total Scan Sheets/SF Total Scan Pages (Report Interval/All-time): The total number of SF scanned sheets/pages tracked by the scanner engine. <input type="checkbox"/> SF Mono Total Scan Sheets/SF Mono Total Scan Pages (Report Interval/All-time): The total number of SF monochrome scanned sheets/pages tracked by the scanner engine. <input type="checkbox"/> SF Color Total Scan Sheets/SF Color Total Scan Pages (Report Interval/All-time): The total number of SF color scanned sheets/pages tracked by the scanner engine.
	<p>Check Scan History</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Paper Scan Count (Report Interval/All-time): The number of times a single sheet has been scanned. <input type="checkbox"/> Card Scan Count (Report Interval/All-time): The number of times a card has been scanned by the card reader. <input type="checkbox"/> Auto-Cutter Driving Count (Report Interval/All-time): The number of times the auto-cutter has been activated. <input type="checkbox"/> Paper Feed Length (m) (Report Interval/All-time): The amount (length) of printing paper that has been fed.
	<p>Check Scanner Aggregation</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Paper Feed Error Count (Report Interval): The number of times a paper feed error has been detected. <input type="checkbox"/> MICR Error Count (Report Interval): The number of times an MICR error has been detected. <input type="checkbox"/> Service Call Error Count (Report Interval): The number of times a service call error has been detected.
<p>Hourly Peak Usage</p>	<p>You can select the same items as in Device Usage.</p>	
<p>Supply Usage</p>	<p>Displays the amount remaining and the replacement times for the ink/toner.</p>	
<p>Accessory Inventory</p>	<ul style="list-style-type: none"> <input type="checkbox"/> Memory <input type="checkbox"/> Duplexer <input type="checkbox"/> Paper Source <input type="checkbox"/> FAX 	

Item	Explanation
Usage Per User	The report is created using all of the following items. You cannot select the items. <ul style="list-style-type: none"> <input type="checkbox"/> User ID <input type="checkbox"/> Department <input type="checkbox"/> Subtotal pages <input type="checkbox"/> 1-sided color print pages <input type="checkbox"/> 2-sided color print pages <input type="checkbox"/> 1-sided mono print pages <input type="checkbox"/> 2-sided mono print pages <input type="checkbox"/> 1-sided color copy pages <input type="checkbox"/> 2-sided color copy pages <input type="checkbox"/> 1-sided mono copy pages <input type="checkbox"/> 2-sided mono copy pages <input type="checkbox"/> Fax transmission <input type="checkbox"/> Scan <input type="checkbox"/> Fax receiving
Usage Per Department	The report is created using the same items as Usage Per User other than User ID . You cannot select the items.
Job History	The report is created using all of the following items. You cannot select the items. <ul style="list-style-type: none"> <input type="checkbox"/> Date <input type="checkbox"/> Job ID <input type="checkbox"/> Operation (Print/Copy/Fax receiving/Fax transmission) <input type="checkbox"/> User ID <input type="checkbox"/> Department <input type="checkbox"/> Result <input type="checkbox"/> Result details <input type="checkbox"/> Print <ul style="list-style-type: none"> Job Name/Paper Size/2-Sided/Color/Number of pages <input type="checkbox"/> Scan <ul style="list-style-type: none"> Destination type/Destination/Paper Size/2-Sided/Color/Number of pages <input type="checkbox"/> Copy <ul style="list-style-type: none"> Paper Size/2-Sided/Color/Number of pages <input type="checkbox"/> Fax receiving <ul style="list-style-type: none"> Paper Size/2-Sided/Color/Number of pages <input type="checkbox"/> Devices <ul style="list-style-type: none"> Model name/IP Address/Serial Number/Department/Location/Remark/Note

The following shows the compatible paper sizes for **Device Usage**.

UI		
A4	Letter	A4/Letter

A3	Ledger	A3/Ledger
A4	Letter	A4/Letter
A5	A5	A5
A6	A6	A6
B4	Legal	B4/Legal
B5	B5	B5
Envelope	Envelope	Envelope
other	other	other

10. Click **Next**.

11. Specify the report range.

The display may differ depending on the data collection conditions that you selected in step 4.

When you have selected **Device Usage, Supplies Usage, Accessory Inventory, Epson Print Admin Serverless - Usage Per User, Epson Print Admin Serverless - Usage Per Department, Epson Print Admin Serverless - Job History, and Authentication Settings - Job History:**

Create New Report / Schedule

Specify the Date Range for Report Generation

Date Range

Report Interval
 Per Week

Date Range
 From 1 Week ago
 To Generated date 1/28/2016

Report Per Week from 1 Week ago to Generated date

Cancel Back Next OK

See the following to make the settings.

Item	Explanation
Report interval	<p>Select the interval for creating reports from the following.</p> <p>This item is not displayed when Epson Print Admin Serverless - Usage Per User, Epson Print Admin Serverless - Usage Per Department, Epson Print Admin Serverless - Job History, and Authentication Settings - Job History are selected in step 4.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Per Day <input type="checkbox"/> Per Week <input type="checkbox"/> Per 2 Weeks <input type="checkbox"/> Per Month <input type="checkbox"/> Per Quarter <input type="checkbox"/> Per Year
Date Range	<p>Specify the report range from the date the report was created or by specifying a date on the calendar. Specify by using a combination of any number over 1 and a day/week/month/year.</p>

When you have selected **Hourly Peak Usage**:

See the following to make the settings.

Item	Explanation
Date Range	Specify the report range from the date the report was created or by specifying a date on the calendar. Specify by using a combination of any number over 1 and a day/week/month/year.
Time Range	Sets the target period of a report. When setting 24 hours, select All day . When specifying a time, set the start and end times.

Note:

If the report range contains a period before Epson Device Admin was installed, the information for that period is blank in the report.

12. Click **Next**.

13. Specify email destinations.

The screenshot shows a dialog box titled "Create New Report / Schedule" with a close button (X) in the top right corner. The main heading is "Specify Destinations".

Under "Notification Type", there are two radio buttons: "Archive only" (unselected) and "Email and archive" (selected).

Under "Mail", there are three input fields:

- To:** A text box containing "ITadmin+deviceusage@epson.com;manager@epson.com". This field is highlighted with a blue border. To its right is a button labeled "Select from History".
- Subject:** A text box containing "Report from Epson Device Admin".
- File format:** Three radio buttons: "PDF" (selected), "HTML" (unselected), and "CSV" (unselected).

At the bottom of the dialog are four buttons: "Cancel", "Back", "Next", and "OK".


See the following to make the settings.

Item	Explanation
Type	Specify whether or not to send a notification email.
To	Enter the email address to which notifications are sent. When entering multiple addresses, separate the addresses with semi-colons (;). You can enter up to 32,767 bytes including [;]. Enter all addresses in the [To] field. You cannot use the [CC] or [BCC] fields.
Subject	The subject of the notification email. You can enter up to 256 characters.
File Format	Sets the file format. You can select from PDF, HTML, or CSV. You can select only CSV when Epson Print Admin Serverless > Job History or Authentication Settings > Job History is selected in step 4.

14. Click **Next**.

15. Specify a report name.

Enter up to 1,024 characters in Unicode.

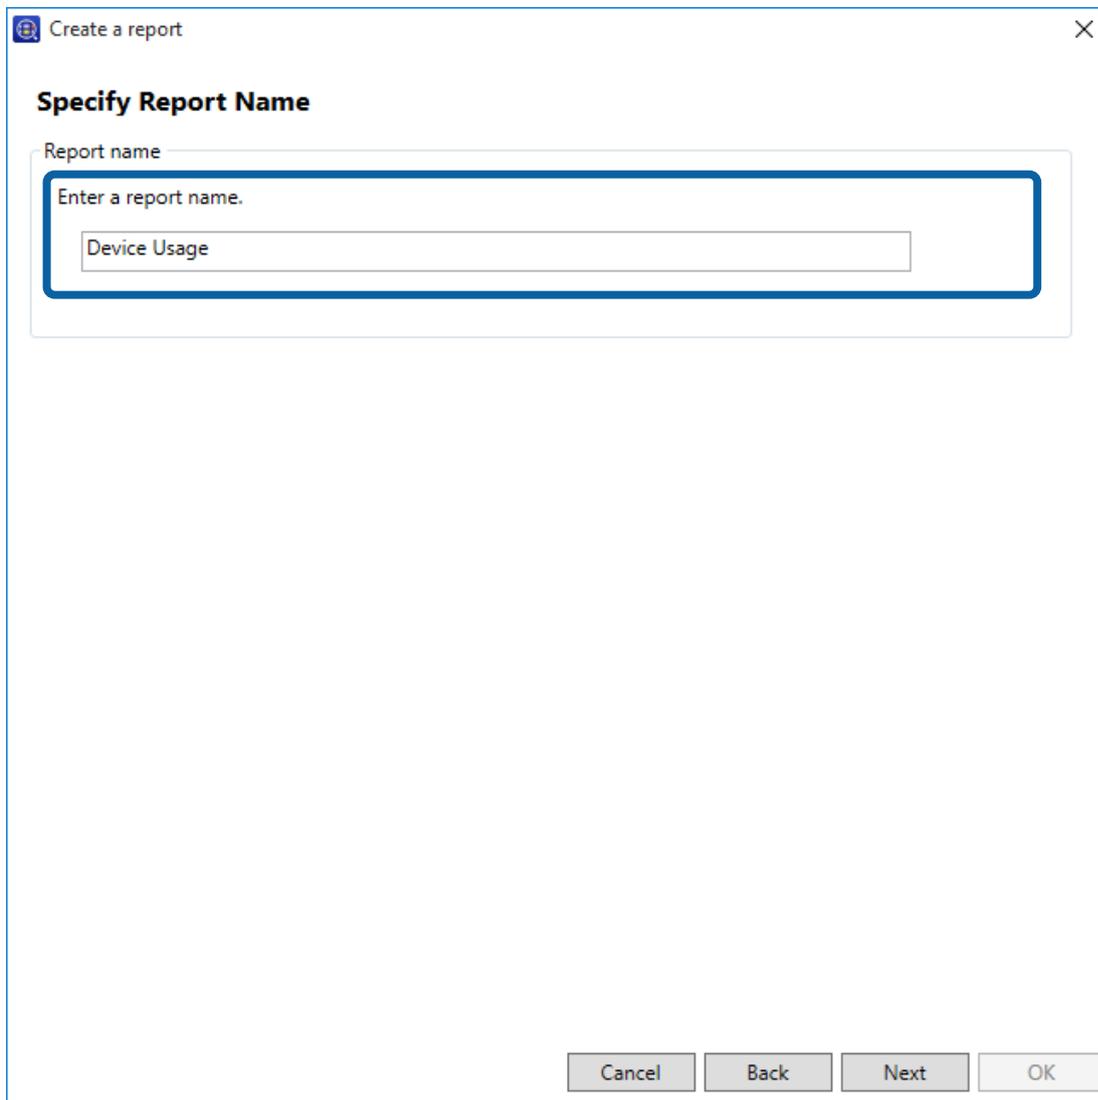

The screenshot shows a dialog box titled "Create a report" with a close button (X) in the top right corner. The main heading is "Specify Report Name". Below this, there is a "Report name" label and a text input field. The input field contains the text "Device Usage". A blue rectangular box highlights the input field. At the bottom of the dialog, there are four buttons: "Cancel", "Back", "Next", and "OK".

16. Click **Next**.

17. Specify a schedule.

Note:


- If you clear the **Create a Schedule** check box in step 5, this screen is not displayed.
- Set the **Start date and time** for the **Creation Schedule** after the data collection time. If this is set to before the data collection time, the report is created before starting data collection on the last day in the report range.
See the related information link below for details.

See the following to make the settings.

Item	Explanation
Start date and time	Set the a day to start the schedule. The units are intervals of one minute.
End date	Set the day to end the schedule. Select None if you do not want to specify an end day.
Report Creation Cycle	Specify the interval for creating reports.

18. Click **Next**.

19. Click OK.

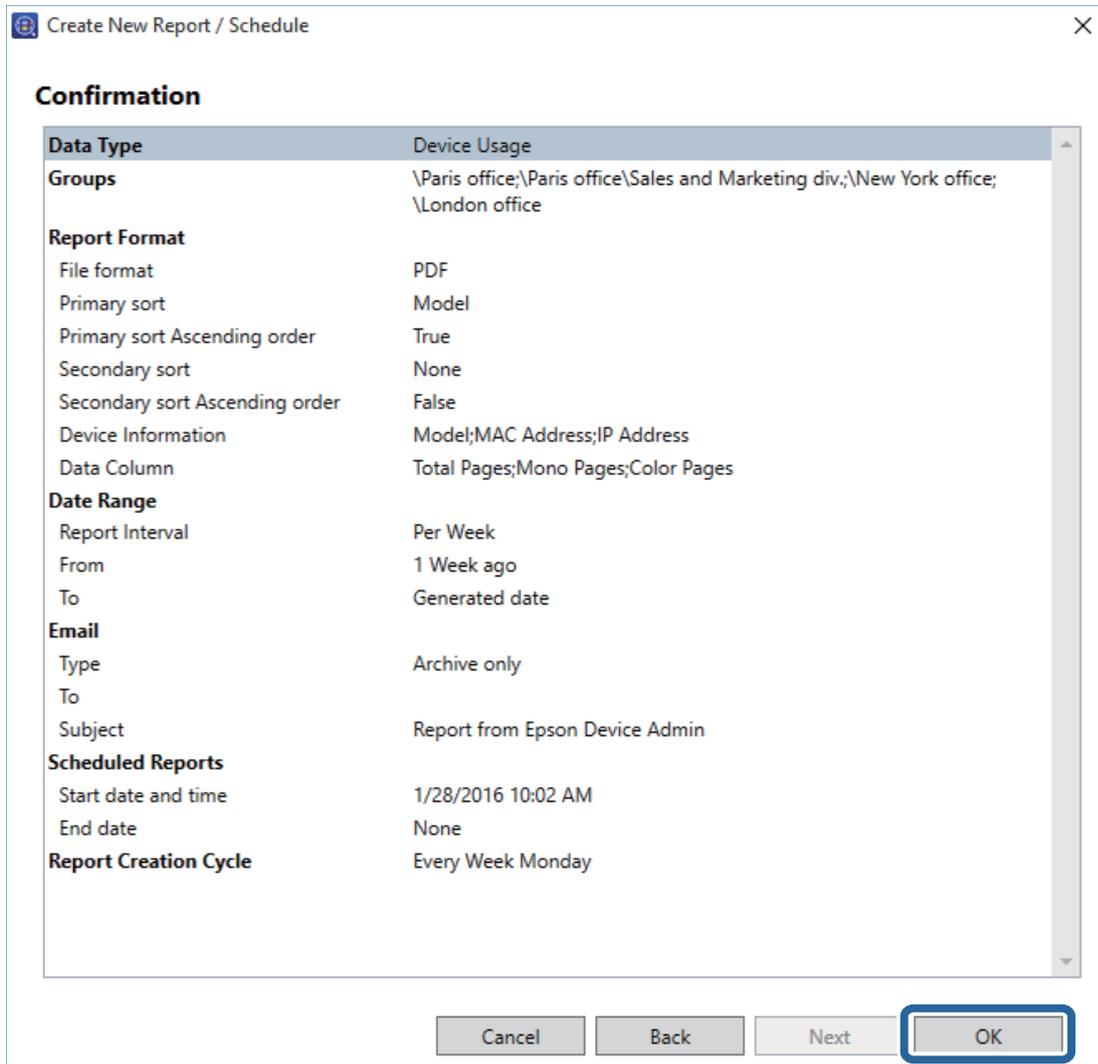

The report or schedule is created.

The created report is saved as an archive report.

❑ Example of created report

Data Type : Device Usage

Primary sort : Model

Secondary sort : None

Device Information : Model, MAC Address, and IP Address

Data Column : Total Pages, Mono Pages, and Color Pages

Report interval : Per Week

Date Range: From 1 Month ago

EPSON		Epson Device Admin Report				
Report Type	Device Usage					
Generated Date	2017/07/06 13:35					
Grouping Criteria	Sales div.					
Sorting Criteria	Model (Primary sort), None (Secondary sort)					
Date Range	2017/06/07 - 2017/07/06					
Report interval	Per Week					
Group: Sales div.						
Date Range	Model	MAC Address	IP Address	Total Pages	Mono Pages	Color Pages
2017/06/07 - 2017/06/13	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.1	204	99	105
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.2	558	388	280
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.3	1309	343	966
Total of the Week				2181	830	1351
2017/06/14 - 2017/06/20	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.1	128	49	79
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.2	795	362	433
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.3	972	355	617
Total of the Week				1895	766	1129
2017/06/21 - 2017/06/27	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.1	149	59	80
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.2	971	441	530
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.3	740	235	504
Total of the Week				1860	746	1114
2017/06/28 - 2017/07/04	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.1	197	104	93
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.2	796	333	433
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.3	748	204	544
Total of the Week				1741	641	1070
2017/07/05 - 2017/07/06	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.1	111	74	37
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.2	347	160	187
	EPSON® Printer	94:2B:34:4A:11:11:11:11	192.168.0.3	304	148	236
Total of the Week				842	382	460
Subtotal				8439	3365	5124
Total				8439	3365	5124

Related Information

- ➔ [“Group Management” on page 39](#)
- ➔ [“Setting the data collection time” on page 119](#)

Configuration Examples for Report Creation

See the following examples to create a report for a fixed range.

Device Usage/Supplies Usage/Accessories Inventory

- ❑ Creating weekly reports for the last three months every month

Specify the Date Range for Report Generation

Report interval: Weekly

Date Range: Last 3 Month

Specify Schedule

Report Creation Cycle: Every Month

- Creating monthly reports for the last six months every month

Specify the Date Range for Report Generation

Report interval: Monthly

Date Range: Last 6 Month

Specify Schedule

Report Creation Cycle: Every Month

- Creating quarterly reports for the last year every quarter

Specify the Date Range for Report Generation

Report interval: Every 3 months

Date Range: Last 1 Year

Specify Schedule

Report Creation Cycle: Every Quarter

Hourly Peak Usage

- Creating daily reports every day

Specify the Date Range for Report Generation

Date Range: Last 1 Day

Specify Schedule

Report Creation Cycle: Every Day

- Creating a weekly report every week

Specify the Date Range for Report Generation

Date Range: Last 1 Week

Specify Schedule


Report Creation Cycle: Every Week

Acquiring data

You can collect data for devices based on the selected data types. Acquired data is used for reports. You can set the collection start time conditions. See the related information link below for details.

1. Select **Reports** on the side bar task menu.

2. Select **Database > Data Collection** from the tree view.

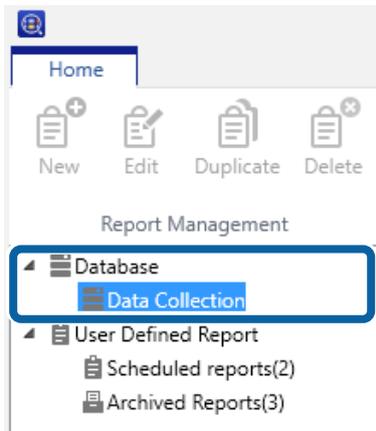

3. Select the collection conditions from the data collection conditions list.
You cannot select multiple collection conditions.
4. Click **Collect Now** on the ribbon menu.



Related Information

➔ [“Setting the data collection time” on page 119](#)

Setting the data collection time and saving period

You can set how long collected data is saved from the option menu on the device management screen.

Setting the data collection time


You can set the collection time depending on the device data collection conditions.

1. Select **Devices** on the side bar task menu.
2. Click **Options** on the **Home** tab on the ribbon menu.



3. Select **Timing**.

4. Select **Data Collection Time**, and then set the start time to acquire data for each condition. You can set from 0:00 to 23:59 in minutes.

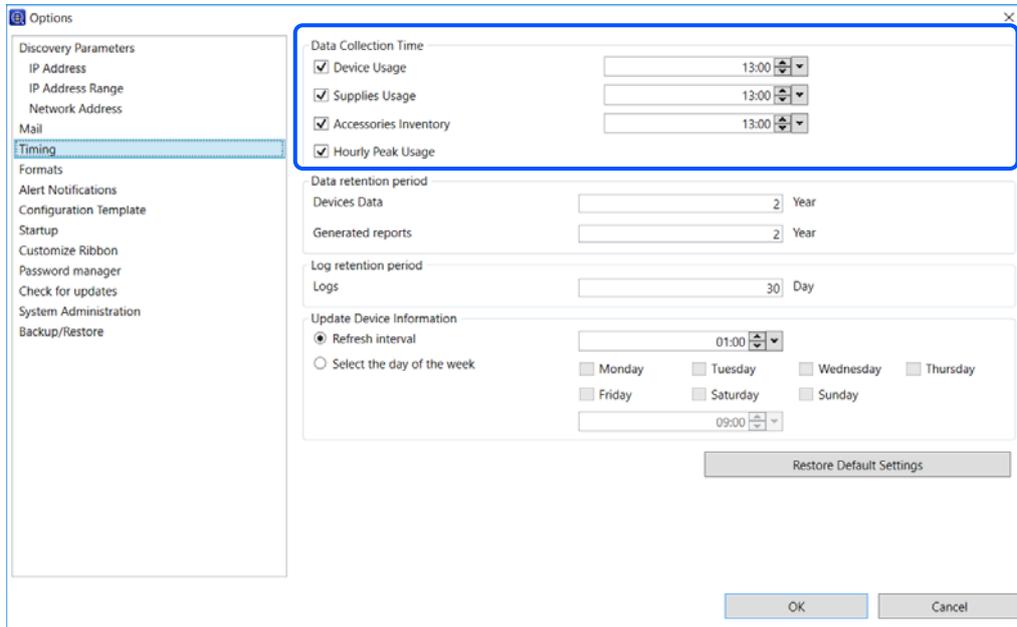

See the following to make the settings.


Item	Explanation
Device Usage	The time to start collecting data based on the device usage conditions.
Supplies Usage	The time to start collecting data based on the consumable usage conditions.
Accessories Inventory	The time to start collecting data based on the accessory installation conditions.
Hourly Peak Usage	Select this to set the time to start collecting data for reports.

Setting the data saving period

You can set the period for saving collected data and reports.

1. Select **Options > Timing**.

2. Set Data retention period.

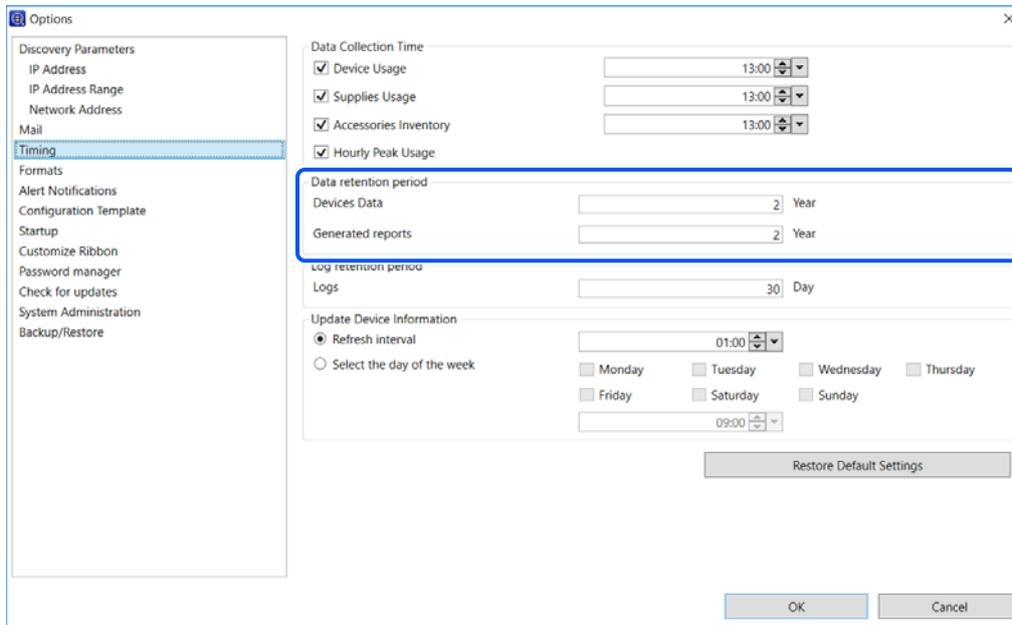

Devices Data

Sets the period for saving collected data.

You can set the period from 1 to 5 in years. Data for which the saving period has expired is automatically deleted.

Generated reports

Set the saving period for reports saved in the archives.


You can set the period from 1 to 5 in years. Data for which the saving period has expired is automatically deleted.

3. Click **OK**.

Switching the report display

When you click items in the tree view, you can switch the report management display.

The number of report formats and archived reports is displayed under **User Defined Report**.

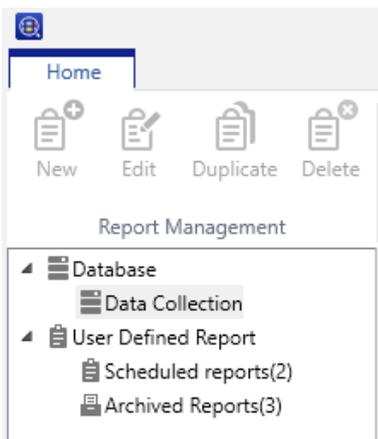

Collecting data

Information on collecting data is displayed in **Database > Data Collection** in the tree view.

Conditions for collecting data

The list of data types is displayed at the top.

You can set the **Data Collection Times** from the **Options** screen. See the related information link below for details.

Device list

The device list for collecting data and the device status is displayed at the bottom.

Data Type	Description	Data Collection Times
Device Usage	Report the number of prints	13:00
Hourly peak usage	Report the number of prints per hour	-
Supplies Usage	Reports the ink/toner level of the devices.	13:00
Accessories Inventory	Report the accessories installed on the device	13:00

Data Type: Hourly peak usage						
Status	Model	IP Address	Serial Number	Groups	First Collection Date	Last Collection Date
Successful	WF-R8590 Series	192.168.0.200	25E9000004	\Paris office\Sales an...	1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	PX-M7050FX	192.168.0.52	UT8Y010674		1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	EP-907F Series	192.168.0.55		\Paris office\Sales an...	1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	PX-M860F	192.168.0.54	4CE9000003	\Paris office\Sales an...	1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	WF-2630 Series	192.168.0.60	1WE9101042	\Paris office	1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	PX-1700F	192.168.0.57			1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	PX-M7050 Series	192.168.0.56	1BE9000046		1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	PX-M650F	192.168.0.58	20E9000051		1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	WF-7620 Series	192.168.0.252	10E9000108	\Paris office	1/28/2016 9:00 AM	1/28/2016 9:00 AM
Successful	WF-5690 Series	192.168.0.100	19G9300005		1/28/2016 9:00 AM	1/28/2016 9:00 AM

Related Information

➔ [“Setting the data collection time” on page 119](#)

User defined reports

Displays the information on report management in **User Defined Report** in the tree view.

Schedule

Displays the report format and the list of schedules when you select **User Defined Report > Scheduled Reports**.

When you select a schedule from the list at the top, the content is displayed at the bottom.

Report Name	Data Type	Last Creation Date	Next scheduled date and...
Device Usage	Device Usage		19/10/2016 15:11
Device Usage	Device Usage		19/10/2016 15:28
Device Usage	Device Usage		

Report Name: Device Usage

Data Type	Device Usage
Groups	\Paris office
Report Format	
Primary sort	Model
Primary sort Ascending order	True
Secondary sort	None
Secondary sort Ascending order	False
Device Information	Model;MAC Address;IP Address
Data Column	Total Pages;Mono Pages;Color Pages
Date Range	
Report Interval	Per Week
From	1 Month ago
To	Generated date
Email	
Type	Archive only
To	
Subject	Report from Epson Device Admin

Archive report

Displays the list of archived reports when you select **User Defined Report > Archived Reports**.

When you select a report, the content of the report is displayed.

Report Name	Date Created	PDF	HTML	CSV
Device Usage - weekly	19/10/2016 14:32	✓	✓	✓
Device Usage	19/10/2016 15:11	✓	✓	✓
Device Usage - weekly	19/10/2016 15:25	✓	✓	✓

Report Name: Device Usage - weekly

EPSON

Report Type	Device Usage
Generated Date	19/10/2016 14:32:36
Grouping Criteria	Paris office, Sales div., London office
Sorting Criteria	Model (Primary sort), None (Secondary sort)
Date Range	20/09/2016 - 19/10/2016
Report interval	Per Week


Group: Paris office

Date Range	Model	MAC Address	IP Address	Total Pa
20/09/2016 - 26/09/2016	EP-977A3 Series	64-EB-8C-02-BC-B0	192.168.13.3	

Sending archived reports by email

You can send archived reports by email.

1. Select **Reports** on the side bar task menu.
2. Select **User Defined Report > Archived Reports** from the tree view.

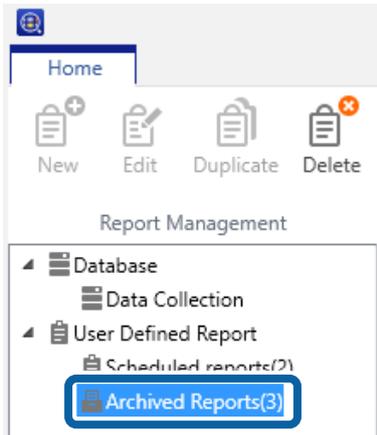

3. Select the report you want to send by e-mail from the report list.

Note:


To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

4. Click **Email** on the ribbon menu.

The email settings screen is displayed.



5. Set each item.

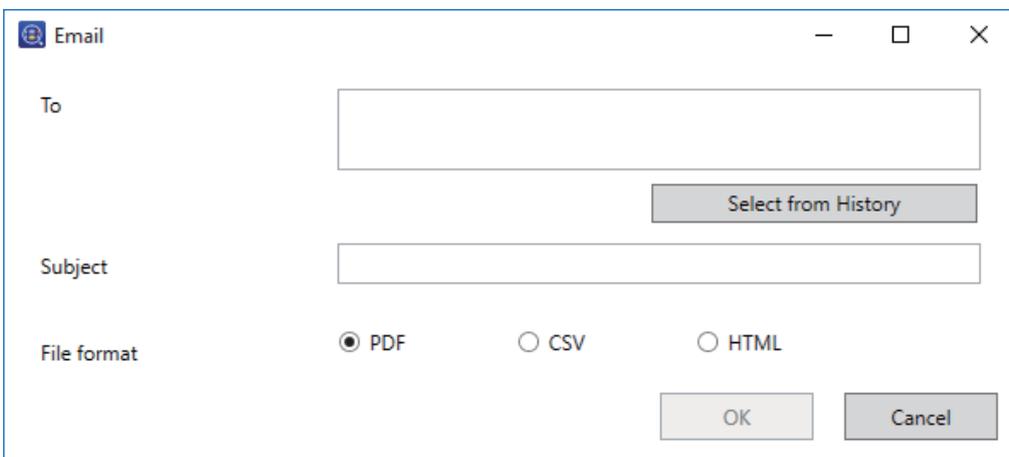

See the following to make the settings.

Item	Explanation
To	Enter the email address to which you want to send a report. When entering multiple addresses, separate the addresses with semi-colons (;). You can enter up to 32,767 bytes including [;]. Enter all addresses in the To field. You cannot use the CC or BCC fields.
Subject	The subject of the report email. You can enter up to 256 characters.
File Format	Sets the file format for the report. You can select PDF, HTML, or CSV.


- Click **OK**.

The set content is sent by e-mail.

Saving and deleting archived reports

You can save and delete an archived report.

- Select **Reports** on the side bar task menu.
- Select **User Defined Report > Archived Reports** from the tree view.

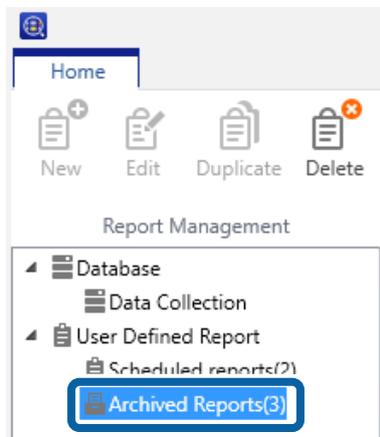

- Select the report you want to save or delete from the report list.

You can only select multiple reports when deleting.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

- Click the edit button on the ribbon menu, and then make save settings or confirm that you want to delete the report depending on the screen displayed.



Save: Save the archived report(s)

The save settings screen is displayed. "Report Template Name + Report Create Day" is set as the file name. You can change this if necessary.

Select the file format and the location to save the file, and then click **OK**.

Delete: Delete the archived report(s)

The delete confirmation screen is displayed. To delete the file, click **OK**.

Maintenance

Printing a Status Sheet

When the devices in your network are printers, you can check detailed information on the devices by printing a status sheet.


You can send printing commands to multiple selected devices.

1. Select **Devices** on the side bar task menu.
2. Select a device (printer) to print a status sheet from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

3. Click **Print Status Sheet(s)** on the **Home** tab on the ribbon menu.

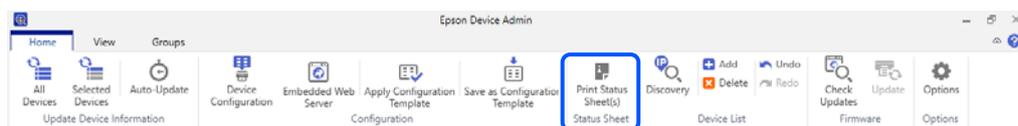

4. Click **OK**.
A status sheet is printed from the printer you selected.

Backing up and Restoring

You can backup and restore system settings. This allows you to prepare for a system failure, as well as add devices or replace devices.

Items that can be backed up and restored

The following items can be backed up and restored.

See the related information link below for details.

System settings

You can save and restore system settings and all Epson Device Admin data to a backup file.

Device list

You can save and restore the device list to which devices were added to a backup file.

Password list

You can save and restore the password list managed by Epson Device Admin to a backup file.

Address book

You can save and restore address book information such as addresses and fax numbers to a backup file.

Configuration template

You can save and restore configuration templates to a backup file.

Device settings

You can save and restore configuration values for devices to a backup file.

Related Information

- ➔ [“System settings” on page 128](#)
- ➔ [“Device list” on page 130](#)
- ➔ [“Password settings” on page 133](#)
- ➔ [“Address books” on page 136](#)
- ➔ [“Configuration templates” on page 141](#)
- ➔ [“Backing up device settings” on page 165](#)

System settings

You can save the database file containing Option menu settings such as Notification email settings, Discovery conditions, and External site access settings, as well as Alert and Formats settings in .zip file format.



Important:

Email service settings for **Mail** are not backed up. You need to set them again after restoring.

Backing up system settings


Note:

- Depending on the size of the database, it may take a while to backup the data.
- You cannot backup and restore when the firmware update schedule is running.

1. Select **Devices** on the side bar task menu.
2. Click **Options** on the **Home** tab on the ribbon menu.
3. Click **Backup/Restore**.

4. Click **Backup**.

A confirmation screen for the backup procedure is displayed.

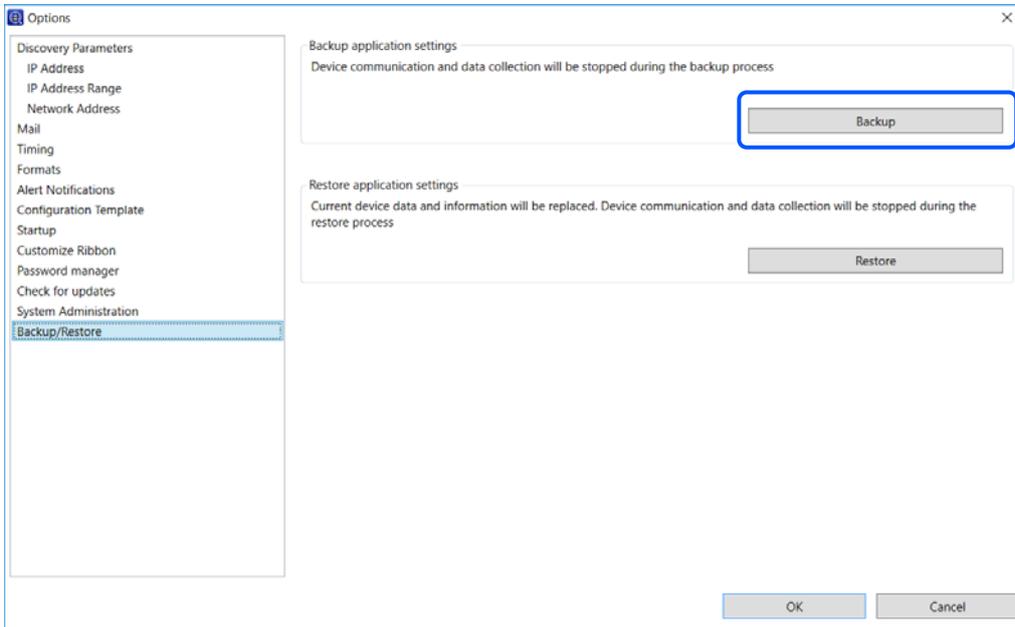

5. Click **Yes**.

The System Backup screen is displayed.

6. Click **Browse**, specify the destination to save the backup file and the file name, and then click **Save**.

7. When you want to set the password, select **Use Password**, and then enter the password.

Enter the password you want to set using up to 20 ASCII characters.


8. Click **OK**.

The backup file is saved to the specified destination.

Restoring system settings

1. Select **Devices** on the side bar task menu.
2. Click **Options** on the **Home** tab on the ribbon menu.
3. Click **Backup/Restore**.

4. Click **Restore**.

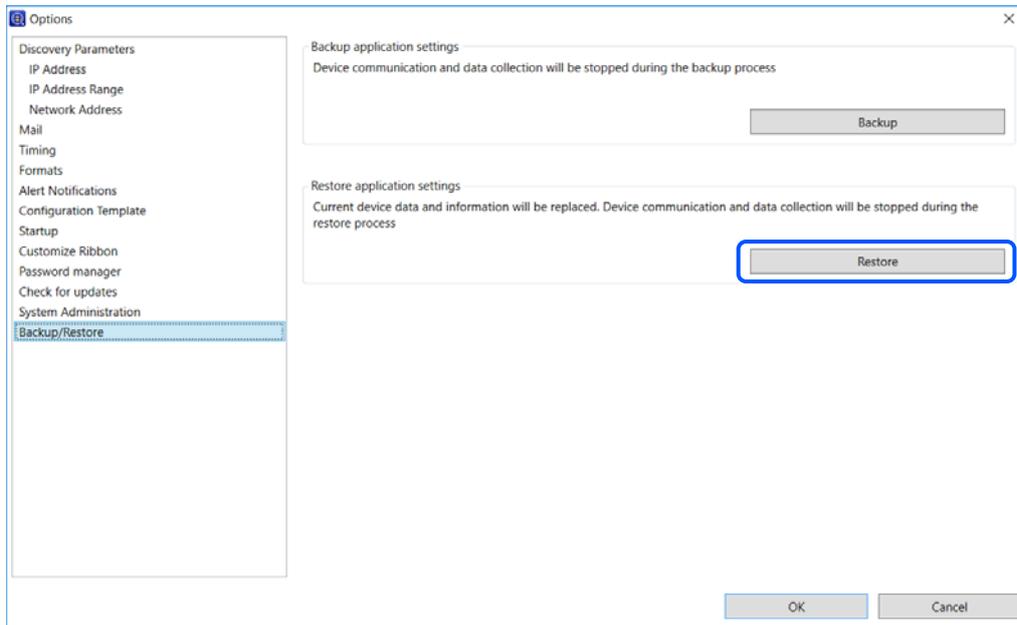

5. Select the saved backup file, and then click **Open**.

6. When a password is set for the file, enter the password, and then click **OK**.

7. Click **OK**.

Restoring is started.

Device list

You can save and read the information on the device list for the device management screen in a device information file.

Note:

- Reset, Open, and Save buttons are displayed on the ribbon menu on the device list management screen when *Show Reset, Open, and Save buttons in the Device List* is selected from *Options > Customize Ribbon*.**

See the related information link below for details.

- Group setting information is not saved when saving the device list.*

Group setting information is saved when you backup the system settings.

See the related information link below for details.

- You can import and export information about devices belonging to the group from the tree view.*

See the related information link below for details.

The following are the device information files.

- Device list file (PLF format)

This is an XML file containing the method for specifying IP addresses and MAC addresses for the device list.

- Device data file (PRDF format)

This is an XML file containing device list file information added when collecting device information. This is encrypted for security.

❑ Device list file (TXT format)

This is a TXT file containing IP addresses separated by line breaks. You can select this when loading device information.

❑ Device data file (CSV format)

This is a CSV file containing the information in the device list file plus the collected device information. You can select this when saving device information.

Related Information


- ➔ [“Setting Options” on page 24](#)
- ➔ [“System settings” on page 128](#)
- ➔ [“Exporting and importing device information” on page 46](#)

Saving a device information file

1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Click **Device List** group > **Save**.



4. Select the file format and save destination.

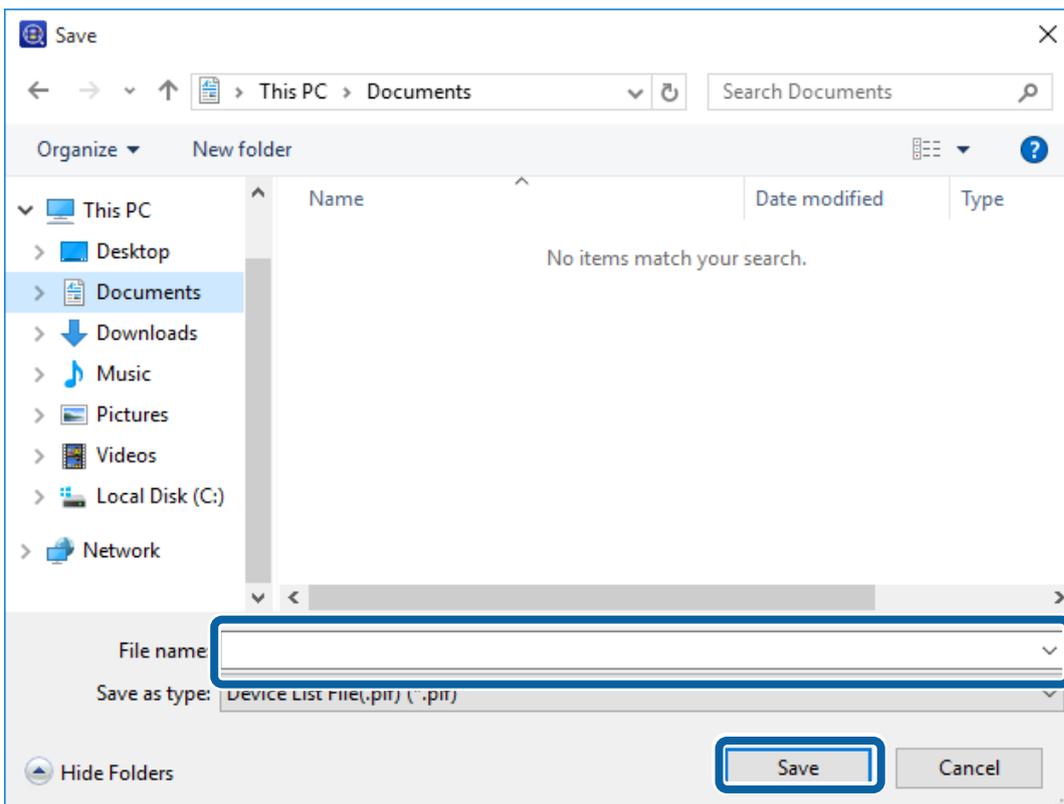

5. Click **Save**.

Reading a device information file

1. Select **Devices** on the side bar task menu.
2. Click the **Home** tab on the ribbon menu.
3. Click **Device List** group > **Open**.




4. Select the information handling method for the file you want to read.



5. Select the device information file, and then click **Open**.

When reading the device list file (PLF format/TXT format), only information for MAC addresses and IP addresses is displayed. To display other information, update the device information.

When reading the device data file (PRDF format), the read-only **Logs** group is added to the first layer of the tree view. Information on the device is displayed here. When you read the device data file again, the **Logs** group is replaced with new information.

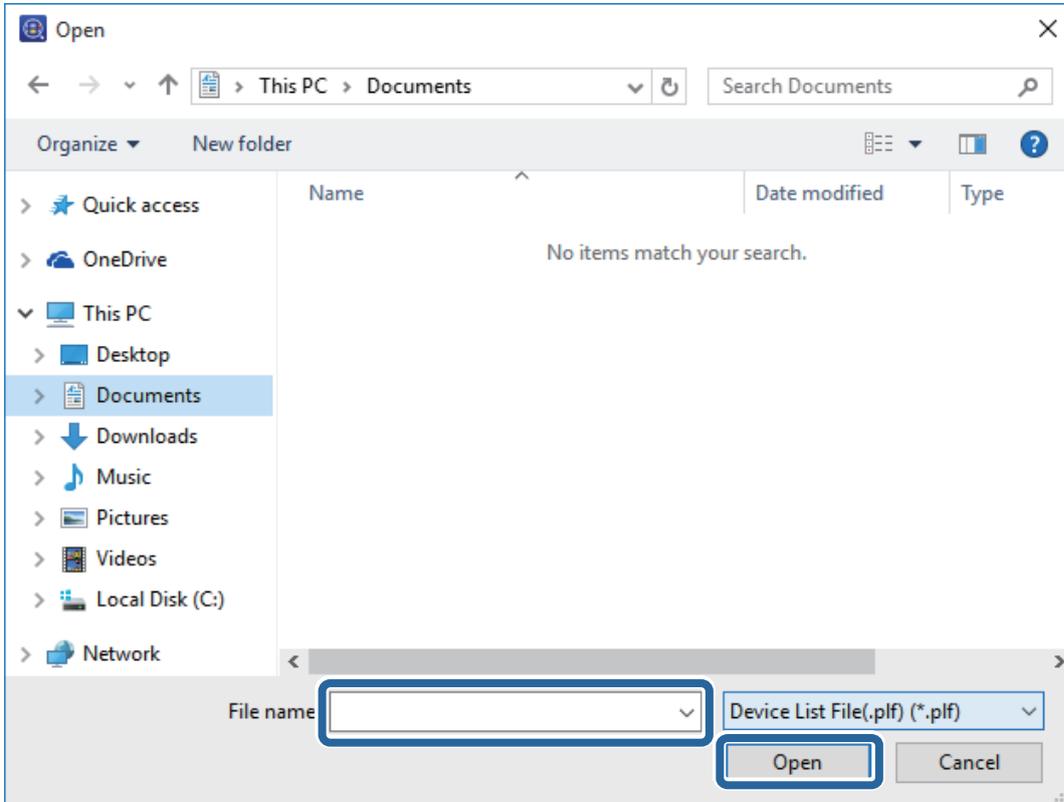

Password settings

You can backup and restore an administrator's password for devices using the password management list. See the related information link below for details on adding and editing passwords.

Related Information


➔ [“Adding and editing a password” on page 69](#)

Backing up passwords

1. Select **Devices** on the side bar task menu.
2. Click **Options** on the ribbon menu.
3. Select **Password manager**.


4. Click **Password manager**.

The password management screen is displayed.

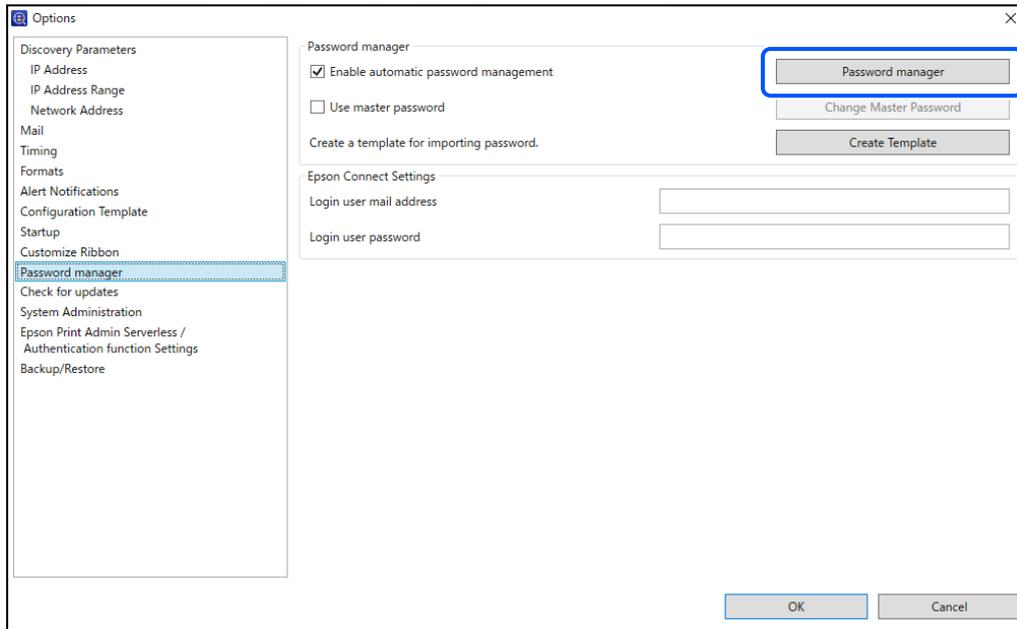


5. Click **Export**.

The password backup screen is displayed.

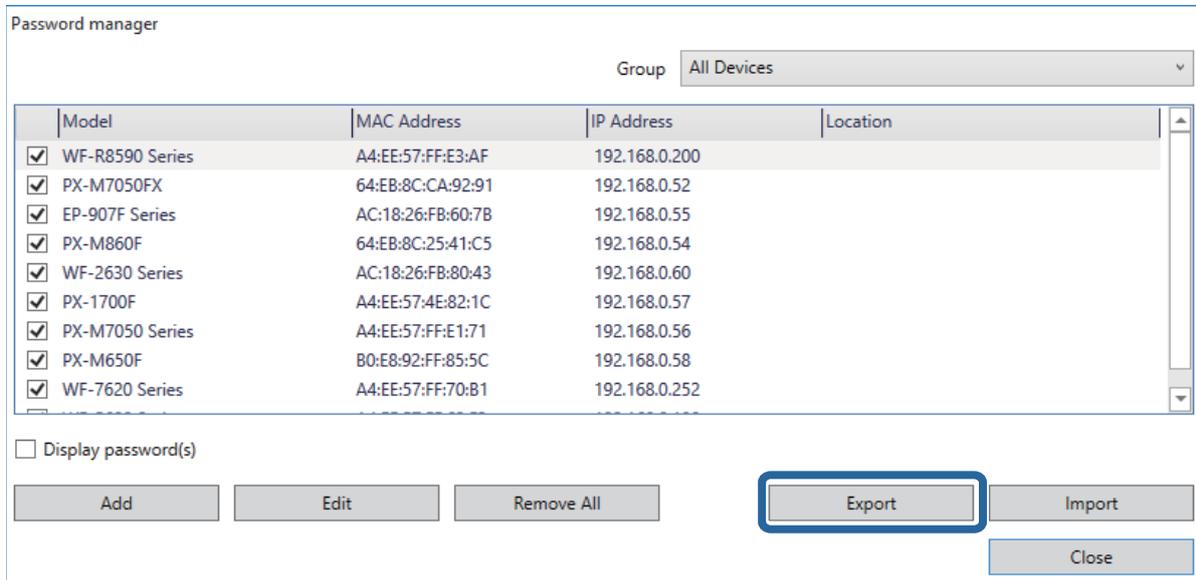

6. Click **Browse** to select the destination to save the backup file.

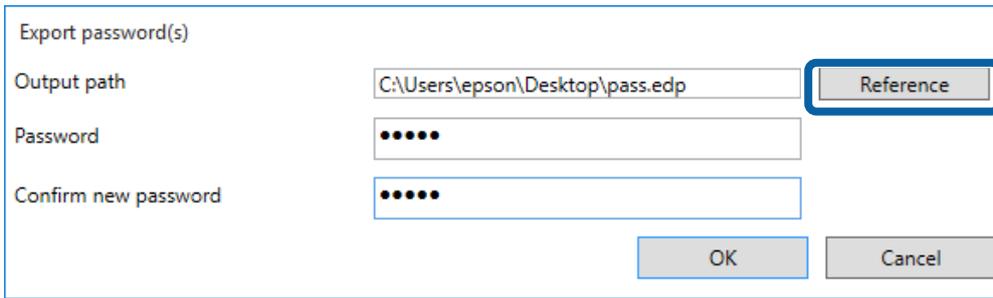


7. Enter a password in **Password**, and then enter the same password in **Confirm new password**. Enter the password you want to set using up to 20 ASCII characters.
8. Click **OK**.

Restoring passwords


1. Select **Devices** on the side bar task menu.
2. Click **Options** on the ribbon menu.
3. Select **Password manager**.
4. Click **Password manager**.

The password management screen is displayed.

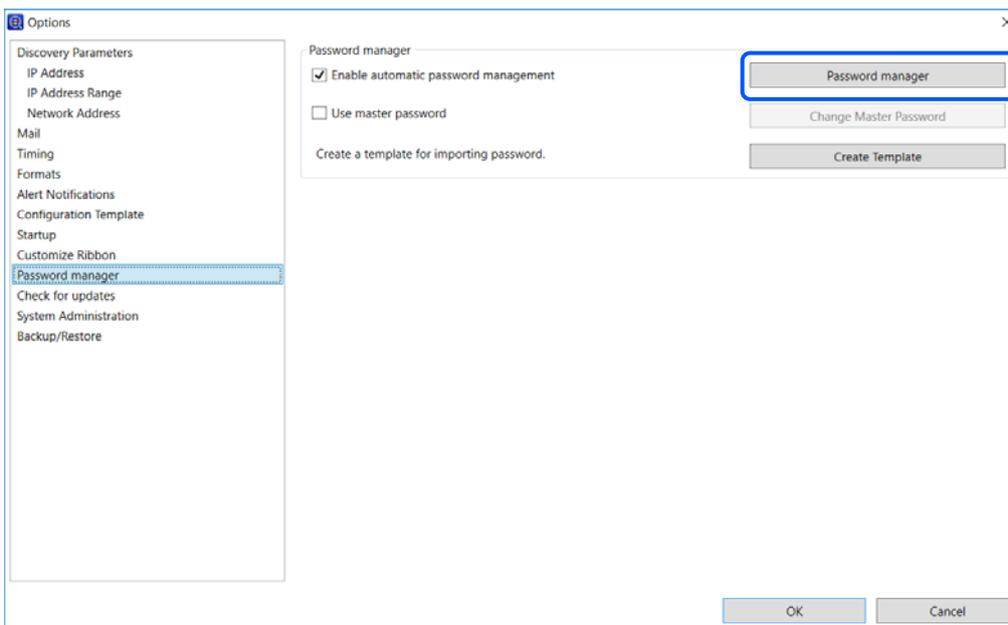


- Click **Import**.

The password restore screen is displayed.

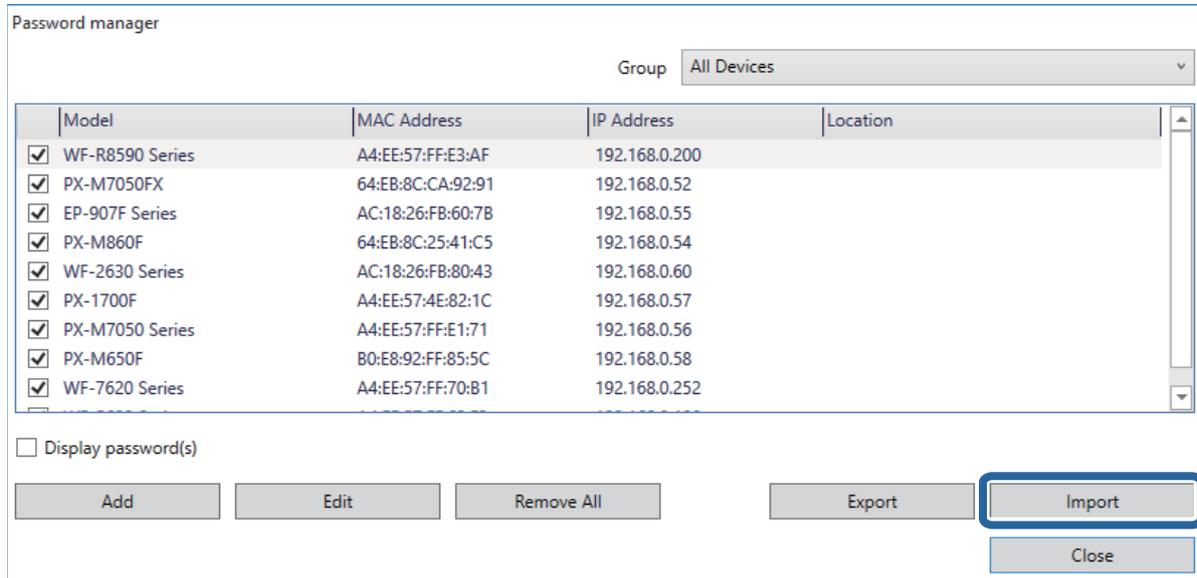

- Click **Browse** to select the backup file.

When overwriting current device passwords, select **Overwrite an existing password**.

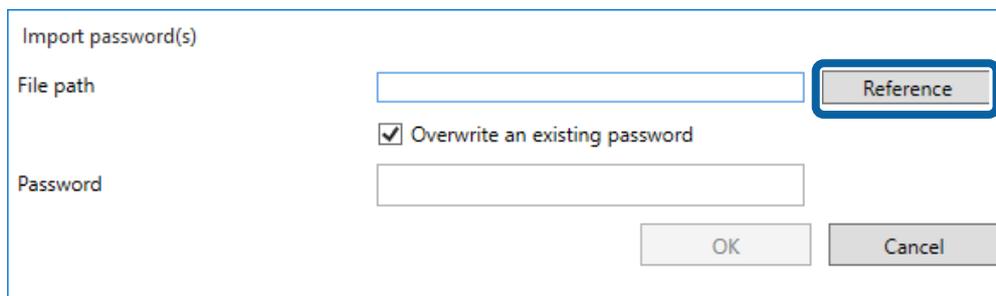

- Enter the password you set for the backup file in **Password**.

Enter the password you want to set using up to 20 ASCII characters.

- Click **OK**.

Address books

You can export and import address books to a file by setting a password.

Note:

This function is only available for supported models.

Exporting by setting a password

See the related information link below for details on exporting items except for security information such as passwords and private information.

1. Select **Devices** on the side bar task menu.
2. Select the device from which you want to export the address book from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

3. Click **Device Configuration** on the **Home** tab on the ribbon menu.
4. Click the item for which you want to edit contact details from the following. Displayed items differ depending on the device being used.


- Common > Contacts**
- Administrator Settings > Access Limitation**
- Scan > Mail Settings**
- Scan > Target Folder**
- Fax > Reception > E-Mail**
- Fax > Fax Number**

See the following for detailed information on each item.


Epson Device Admin Help "Device Properties"

5. Click **Export**.

Screen for Contacts.

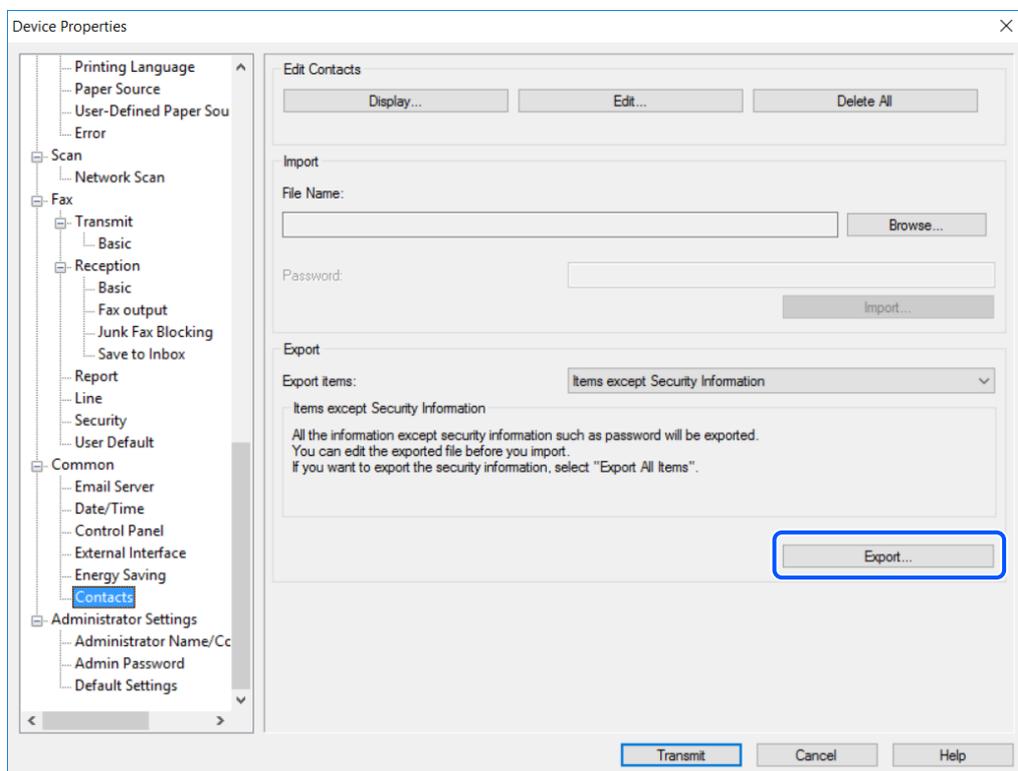


6. Select **Export with Security Information**, and then click **OK** to set a password.

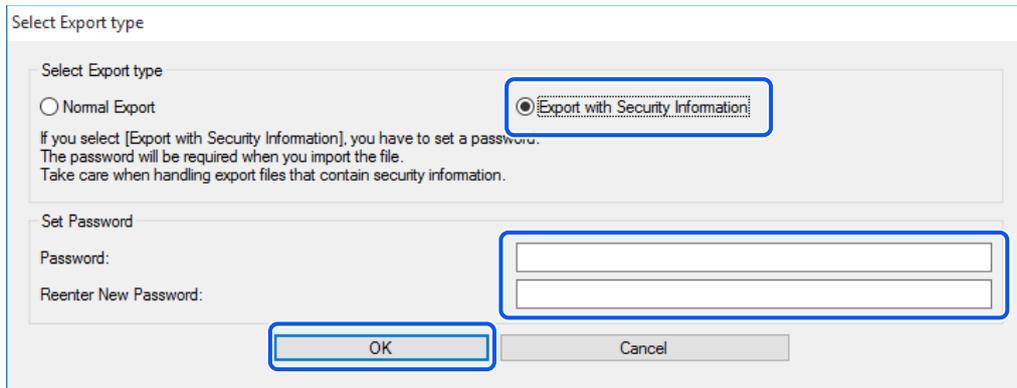

7. Enter a file name, and then click **Save**.

An encrypted ENE format binary file is saved. You cannot edit this file.

When importing this file, a password is required.

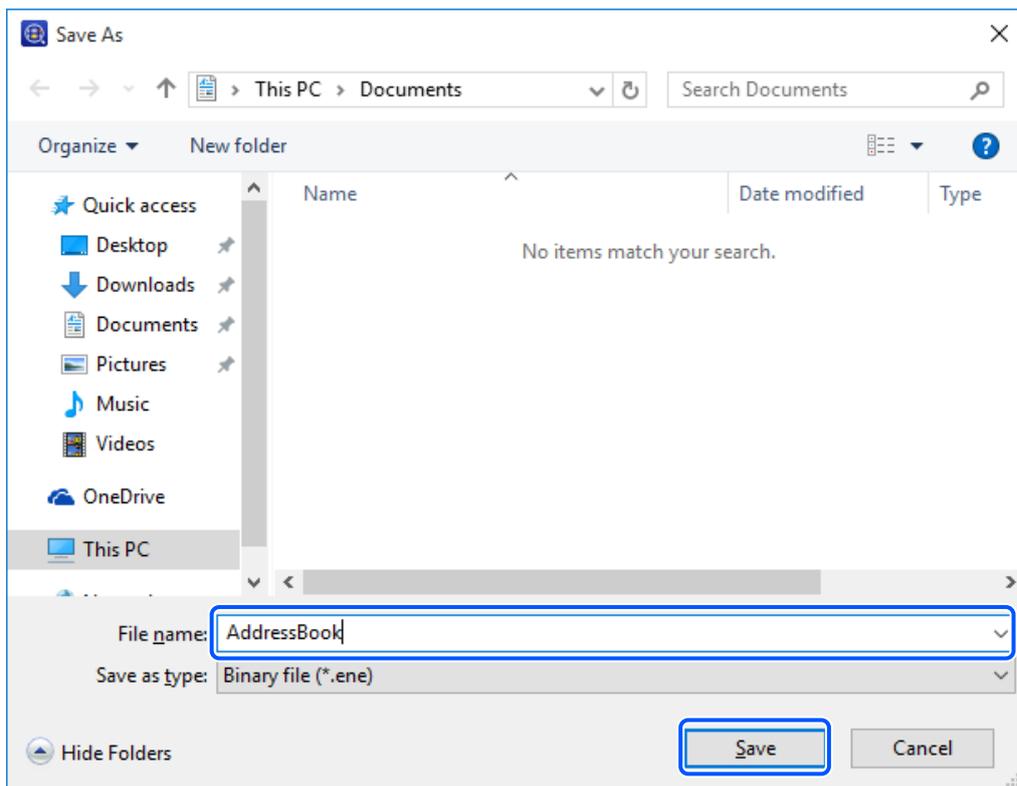

Related Information

➔ [“Registering Different Address Books” on page 71](#)

Importing files containing security information

See the related information link below for details on exporting items except for security information such as passwords and private information.


1. Select **Devices** on the side bar task menu.
2. Select the device for which you want to import an address book from the device list.

Note:


To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

3. Click **Device Configuration** on the **Home** tab on the ribbon menu.
4. Click the item you want to edit from E-Mail, FAX to Folder, or Fax Number. Displayed items differ depending on the device being used.
5. Click **Import**.

Screen for Contacts

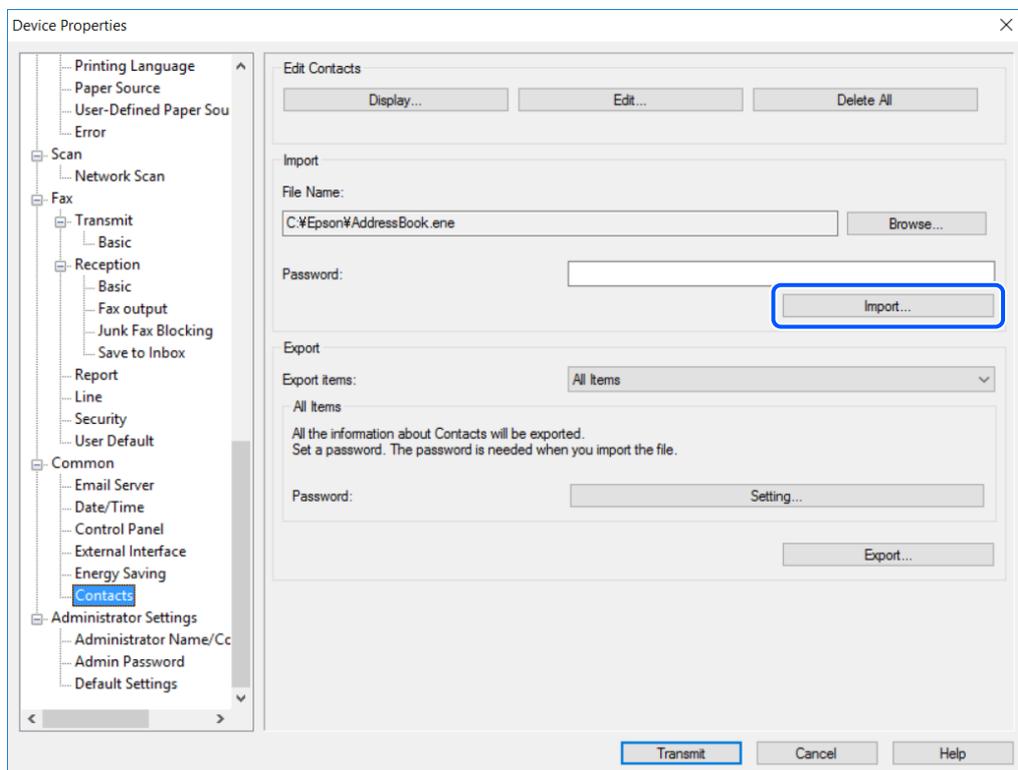


6. When the "Start Import Wizard Confirmation" message is displayed, click **OK**.

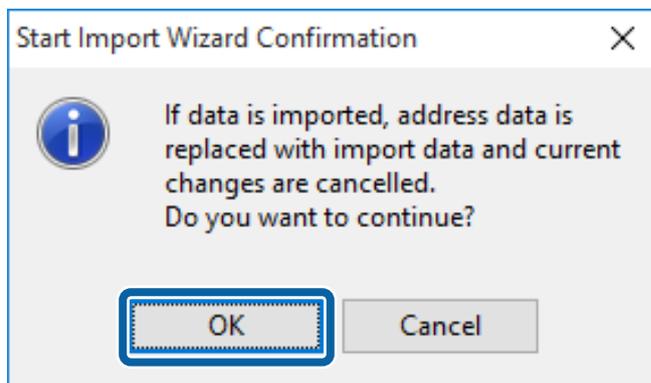


7. Set the path to the file you want to import, and then click **Next**.


Click **Browse**, and then select the binary file (*.ene) containing information such as email addresses or user information for the Access Limitation function, and then click **Open**. You need to enter the password set when the file was exported to open a binary file.

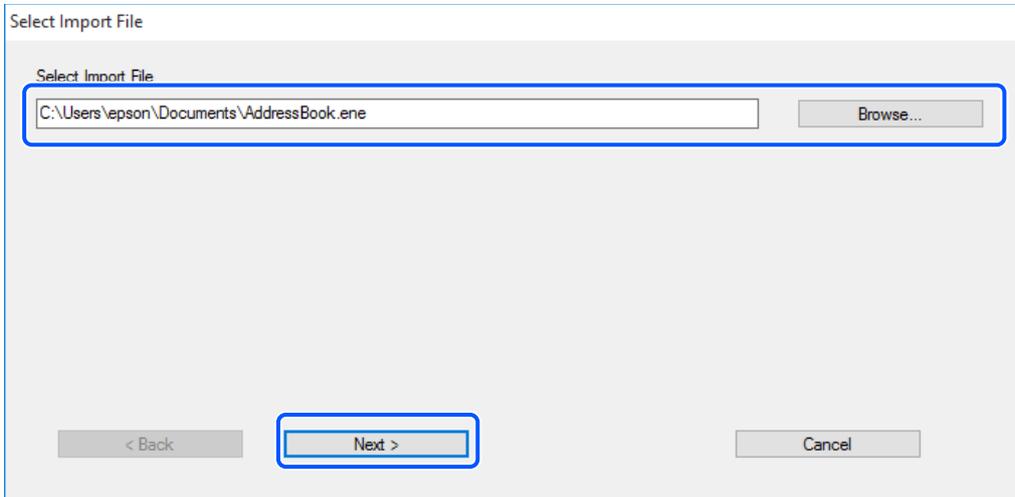


8. Click **Transmit**.

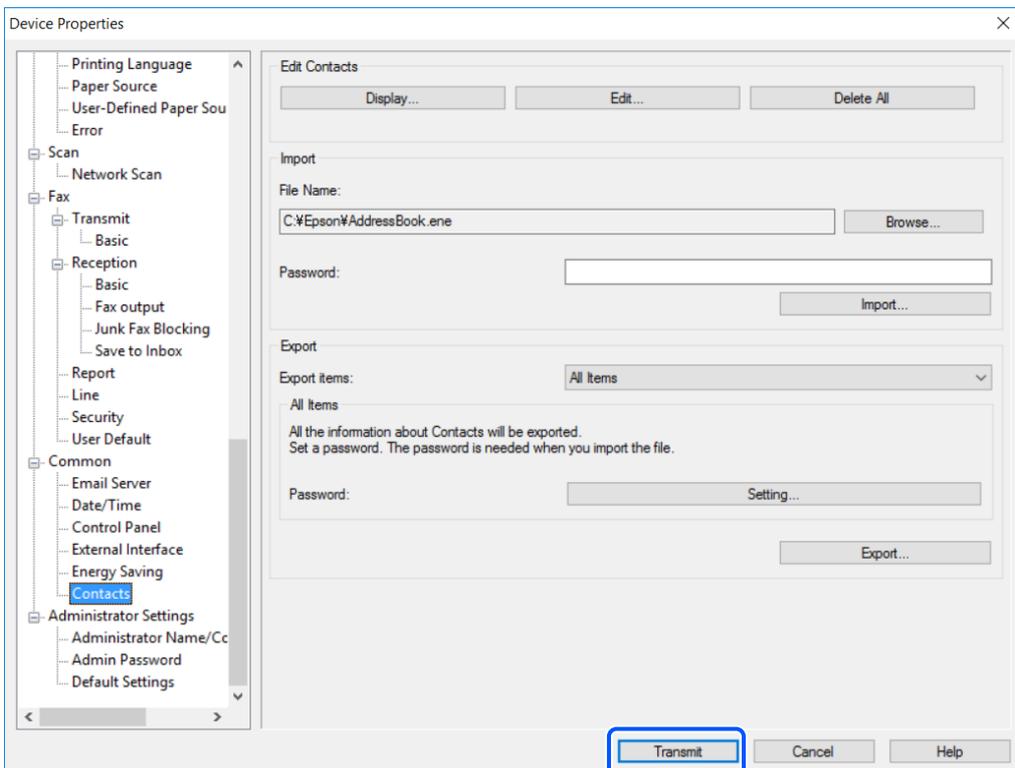

9. When a confirmation screen is displayed, click **OK** to start transmitting the settings.

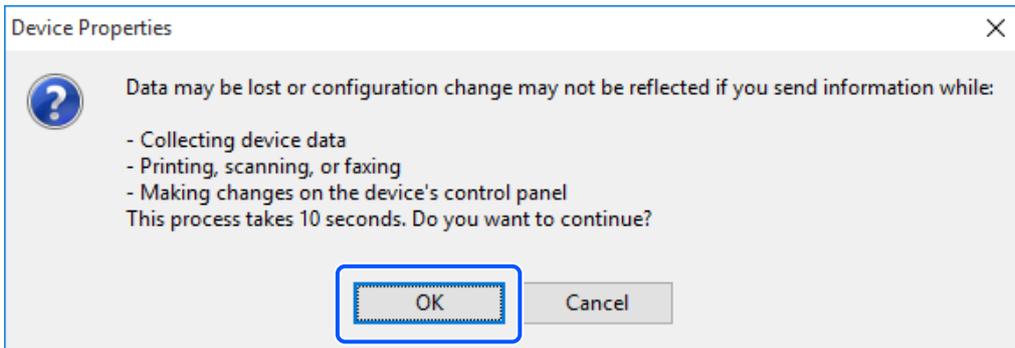

10. Click **OK** to complete transmission.

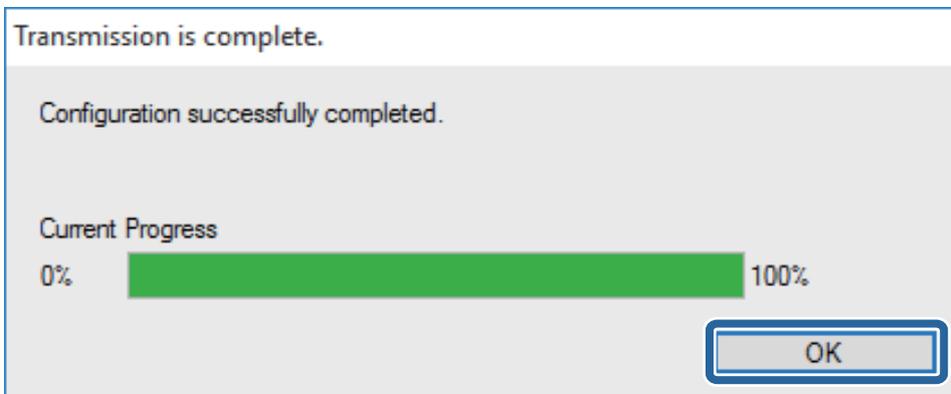

Related Information

- ➔ [“Reading the settings file” on page 76](#)

Configuration templates

You can save and restore configuration templates to a file.

Saving configuration templates

1. Select **Configuration** on the side bar task menu.
2. Select a configuration template to backup from the template list.

You cannot select preset configuration templates.


Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

3. Click **Backup** on the ribbon menu.



4. Select the destination to save the file and enter a file name.

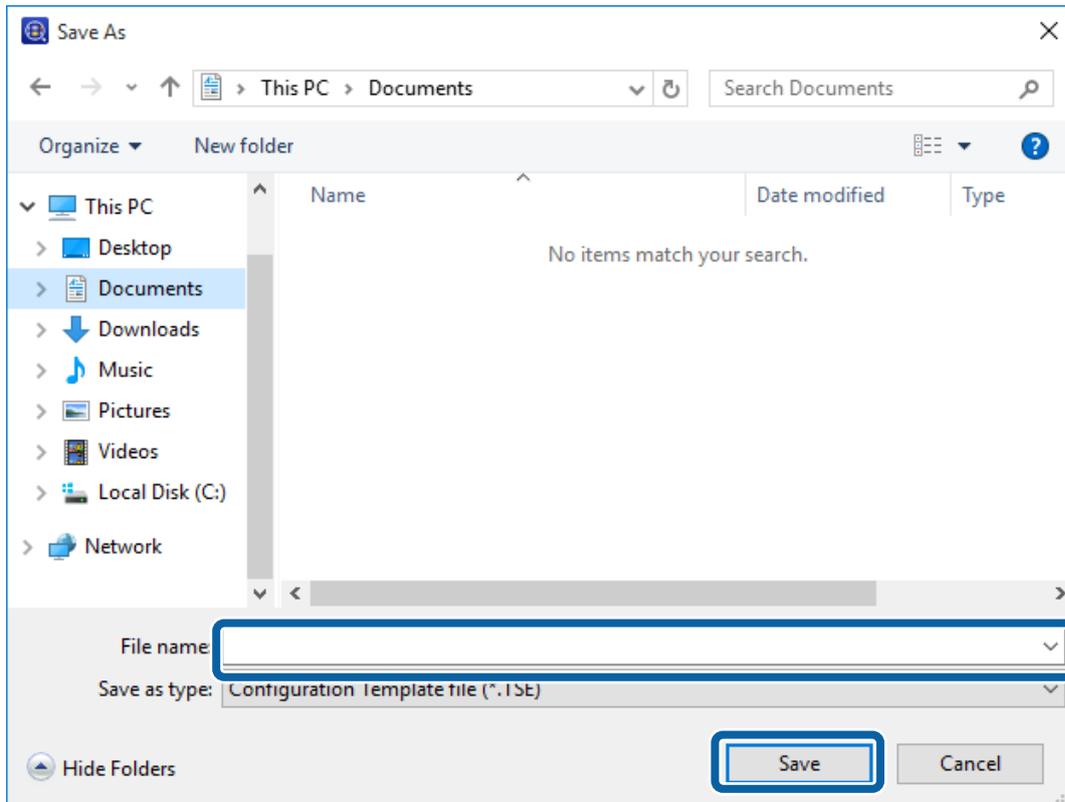

5. Click **Save**.

TSE format template files are saved together in a Zip file.

Reading configuration templates

Unzip the Zip file containing configuration templates and retrieve the configuration template files (TSE format).

1. Select **Configuration** on the side bar task menu.
2. Click **Import** on the ribbon menu.

The file import screen is displayed.




3. Select the configuration template file (TSE format) to be imported.
4. Click **Open**.
The configuration template is imported and the results are displayed.
5. Click **OK**.


Deleting Personal Information from the Epson Print Admin Serverless or Authentication Job History

You can delete personal information from Epson Print Admin Serverless or from the Authentication Job History.

1. Click **Options** from the ribbon menu.
2. Select **Epson Print Admin Serverless / Authentication Settings** from **Options**.

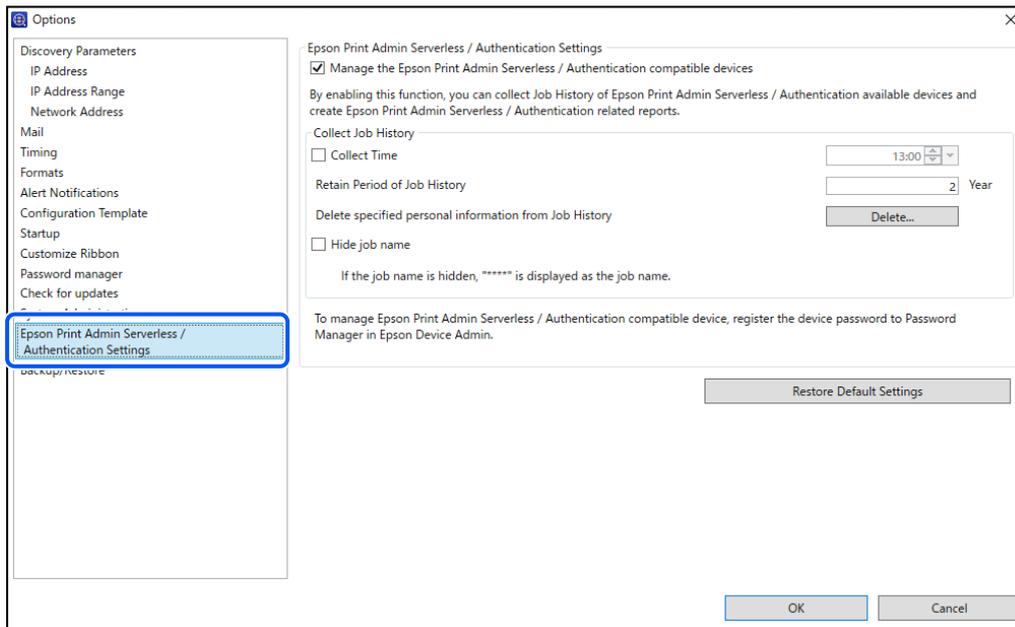

3. Click **Delete** from **Delete specified personal information from Job History**.

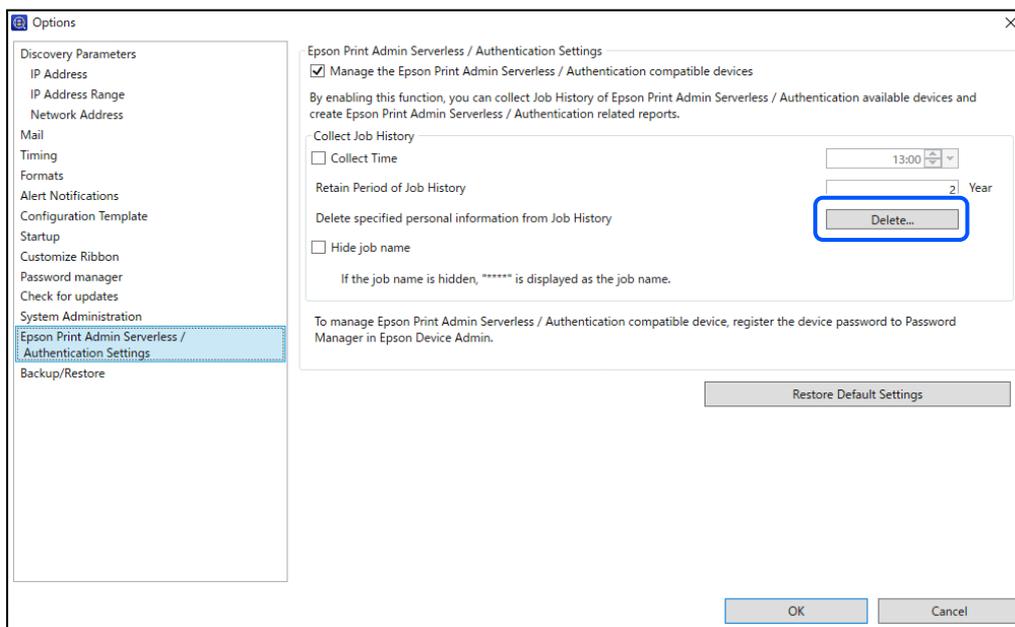

4. When a notification is displayed warning you that information will be deleted, click **Next**.

5. A screen is displayed from which you can select personal information (User ID, E-Mail Address, Fax Number). Select the personal information you want to delete, and then click **Next**.
Only the screen that contains registered information is displayed.
6. Click **OK** on the confirmation screen to delete the information.

Troubleshooting

Troubleshooting for Epson Device Admin.

Cannot discover devices.

Assign an IP address to the devices, and then specify the IP address manually.

Cannot change the network interface, or cannot use it on the network.

Solution 1)

Check if you can print a network status sheet.

If you can print the sheet, check the network settings printed on the network status sheet.

Solution 2)

Check if hubs and LAN cables are working correctly. For hubs, check if the link lights for the ports where the devices are connected are flashing or lit.

Check the following if the link light is off.

- Connect the hub to a different port.
- Connect to a different hub.
- Replace the LAN cable.

If you still cannot communicate after trying all of the above, the network interface may not be working. See the device manual for details.

Solution 3)

Check if the IP address is valid.

The default IP address is "192.168.192.168". However, you cannot use this address on the network. Change the address according to your environment.

Solution 4)

Check if **Keep blocking**, **Cancel**, or **Block** is selected on the "Windows Security Alert" screen or in your commercially available security software.

Communication cannot be performed if one of these is selected. To enable communication, register this application as an exception in the Windows firewall or your commercially available security software.

Some commercially available security software still may not allow communication. In this situation, close the security software while using this application. When you have finished using this application, restart your security software.

You do not know the IP address.

Solution 1)

If you want to use the DHCP function on the router (DHCP Server, or Wi-Fi router), set the device to automatically acquire the IP address.

Solution 2)

To set up the IP address and subnet mask manually, see the following.

1. Check the IP address of the router (DHCP Server, or Wi-Fi router) that is connected to your computer. See the router's manual for details on checking the IP address.
2. For IPv4, the IP address is composed of four segments of numbers. From the first to the third segment of the numbers, set the same number as the router. Set a unique number between 1 to 254 for the fourth segment.

Example:

If the router's IP address is 192.168.1.1

Set the device to 192.168.1.3

Set 255.255.255.0 as the subnet mask if you are on a small network. Set the same number for all devices in the network. If the gateway can be configured, use the same IP address as the router. Note that you cannot use the address 192.168.192.168 on the network.

The message "The network connection is invalid or not set. Check the network settings." is displayed when running Epson Device Admin.

This message is displayed in the following situations.

- When TCP/IP is not built-in to the computer.
- When the computer's IP address is incorrect.
- When there is no DHCP server and the Epson Device Admin is set to acquire an address from the DHCP server.

Check the computer status, built-in TCP/IP, and set the IP address.

Not Ready is displayed as the IP Address on the device list.

Solution 1)

You can set up a network interface even if **IP Address** is not displayed. In this case, **MAC Address** is used to specify the device. You can check the MAC address by printing a status sheet or from the printer's control panel. See the product's documentation for details.

The IP address is displayed correctly when a network interface is configured.

Solution 2)

Go to **Devices > Options**. Set the discovery conditions, and then click **Discovery**.

See the related information link below for details.

Solution 3)

Go to **Options > Startup**. Set the **Discovering and rebooting timeout (10-180)** to a larger value. However, discovering may take some time when a large value is set.

See the related information link below for details.

Related Information

- ➔ [“Discovery condition settings” on page 35](#)
- ➔ [“Setting Options” on page 24](#)

IP address changes on its own.

Solution 1)

Set the **Method for Specifying IP Address** to **Manual** on the **Basic > TCP/IP** screen, and then manually enter the IP address.

Solution 2)

If you want to set the **Method for Specifying IP Address** to **Automatic** and your DHCP server does not support dynamic DNS, make sure you turn on the devices in the same order every time or keep them turned on.

Devices from other companies are not displayed in the device list, or they are displayed but not enough device information has been acquired.

The SNMP protocol is used to acquire device information in Epson Device Admin.

If you want to discover devices from other companies and acquire their information in Epson Device Admin, they need to support the SNMP protocol and be compliant with MIB II (RFC 1213), HostResource MIB (RFC1514), and Printer MIB (RFC 1759).

Epson Device Admin acquires the device information using these MIBs. If devices from other companies cannot respond to these MIBs, their information cannot be acquired.

Also, the volume of information acquired from devices from other companies may be less than the information acquired from the Epson device.

Appendix

Secondary Device Management Method

SYLK is a secondary method for managing devices and their settings.

Assigning IP address

Epson Device Admin can recognize the Epson devices on the network even when IP addresses have not been assigned. Follow the steps below to assign an IP address.

See the related information link below for details.

1. Connect devices to the network using an Ethernet cable.
2. Discover the devices.
Set the necessary discovery range.
3. Use the filter feature on the device list to unfilter devices by **IP Address**.
4. Save a SYLK file for making settings.
5. Enter IP addresses in the network settings columns in the SYLK file, and then save the file.
6. Set IP addresses for the devices using the batch settings feature.

Related Information

- ➔ [“Discovering devices” on page 34](#)
- ➔ [“Using filters” on page 95](#)
- ➔ [“Create a file outlining the settings” on page 154](#)
- ➔ [“Batch Settings” on page 149](#)

Checking for overlapping items


When managing multiple devices, conflicts may occur when replacing devices for settings that are assigned unique values for each device, such as IP addresses.

You can check for overlapping items when reading a SYLK file for device settings. Follow the steps below to find overlapping IP addresses.

See the related information link below for details.

1. Select devices in each group, or select all devices, to confirm conflict items from the device list.
2. Save a SYLK file for making settings.
3. Apply all SYLK files.

- When there are items that conflict, the following screen is displayed.
Check the message displayed.

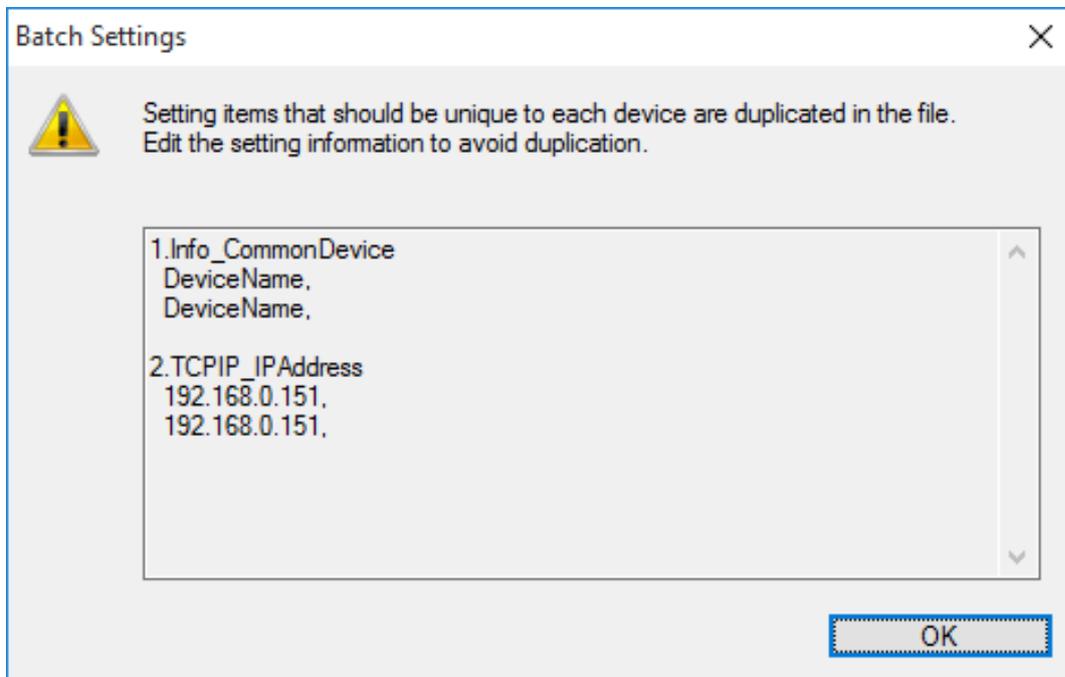

- Search for items that conflict in the SYLK file created in step 2, and then correct the conflicts.
- Apply the SYLK file again.

Related Information

- ➔ [“Create a file outlining the settings” on page 154](#)
- ➔ [“Assigning information automatically” on page 150](#)

Batch Settings

Make batch settings for multiple devices by importing a SYLK (*.slk) file.

See the related information link below for details on creating a SYLK file.

Note:

When you select **Show Batch Settings button** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the **Device** screen ribbon menu.

See the related information link below for details.

Related Information


- ➔ [“Creating a SYLK file to describe the settings” on page 159](#)
- ➔ [“Setting Options” on page 24](#)

Assigning information automatically

1. Select **Devices** on the side bar task menu.
2. Select the device you want to configure from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

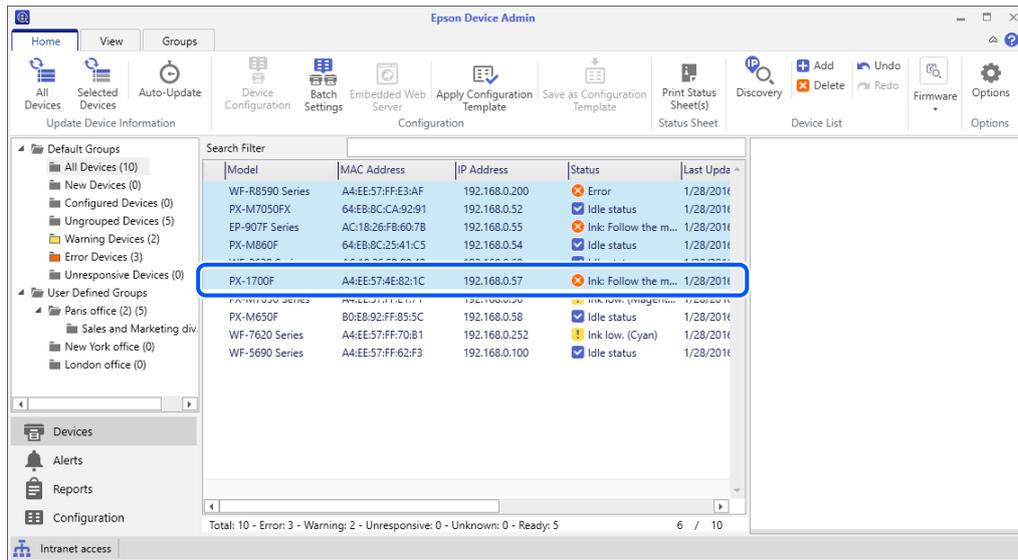


3. Click **Batch Settings** on the **Home** tab on the ribbon menu.


Note:

When you select **Use batch configuration** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the Device screen ribbon menu.

See the related information link below for details.

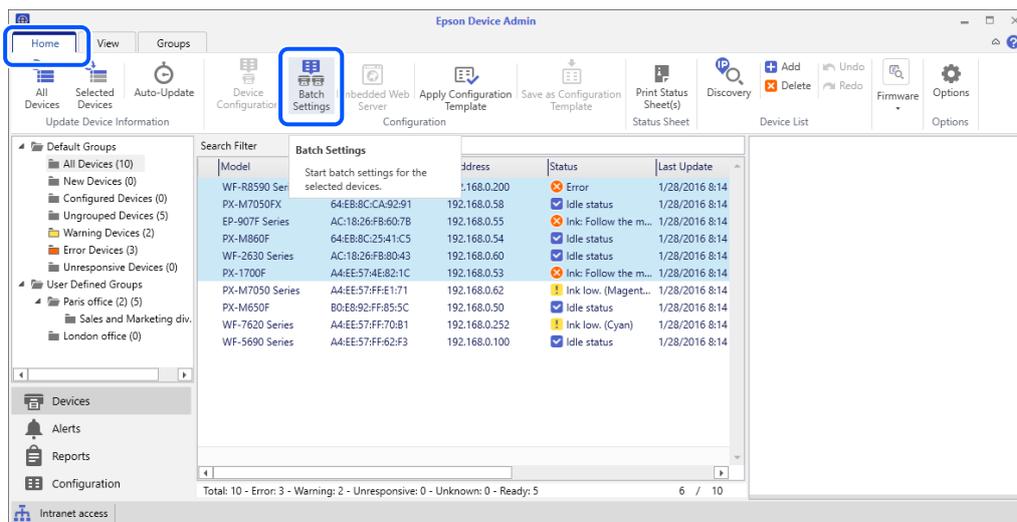


4. Click **Open**.

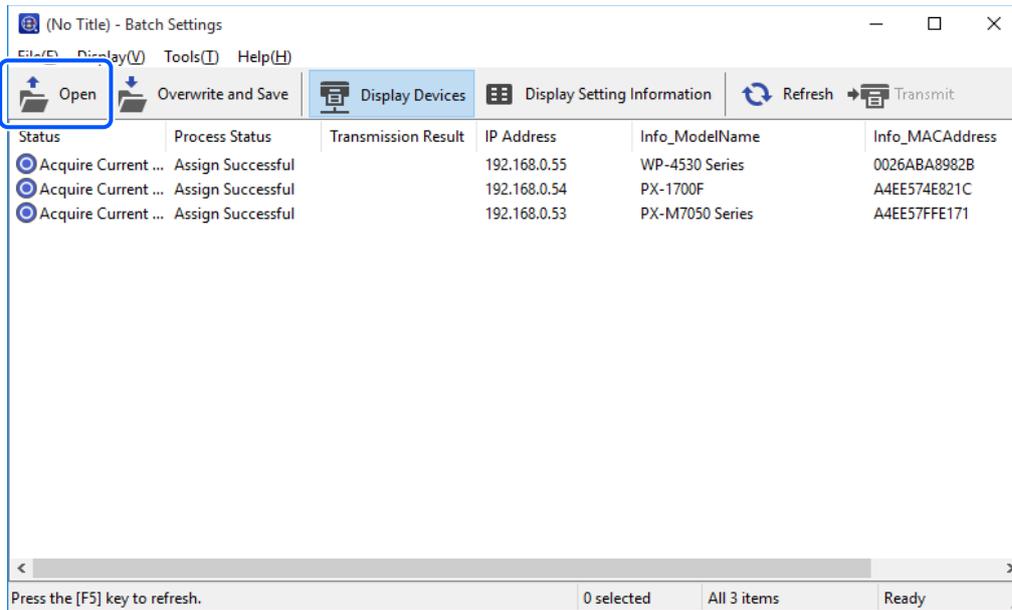

5. Select the SYLK file (*.slk) containing the settings, and then click **Open**.


The settings in the SYLK file are applied to the device.

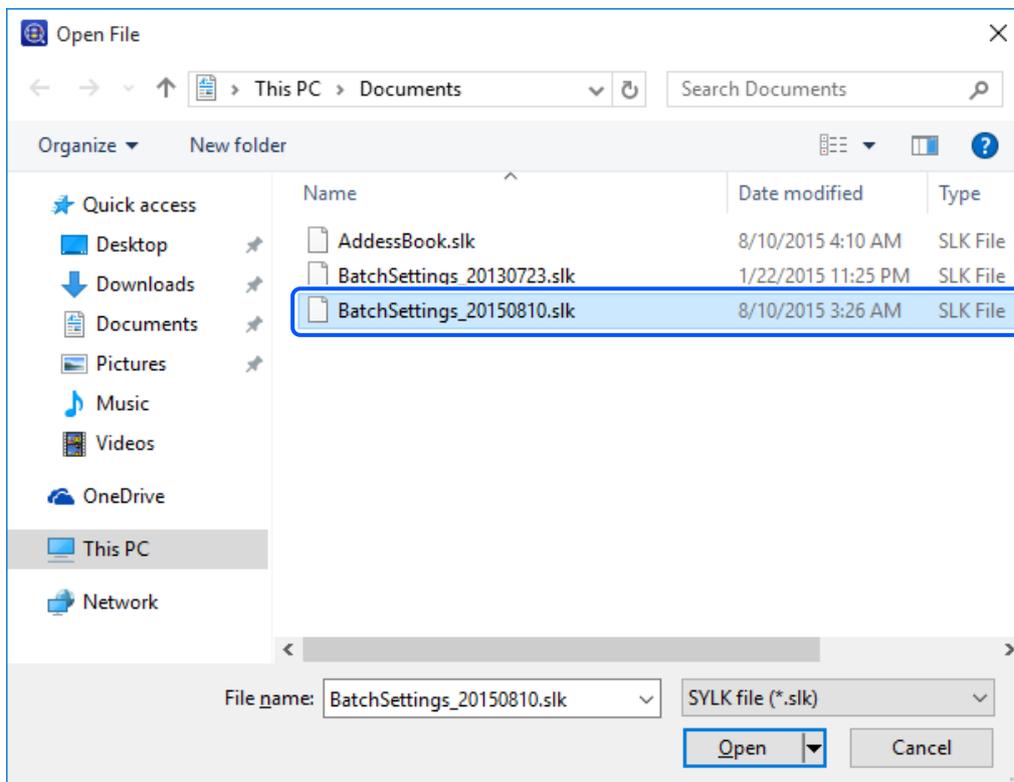

- Select the devices for which you want to perform batch settings with the **Status** column set to **Unset**, and the **Process Status** set to **Assign Successful**.

Note:


To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

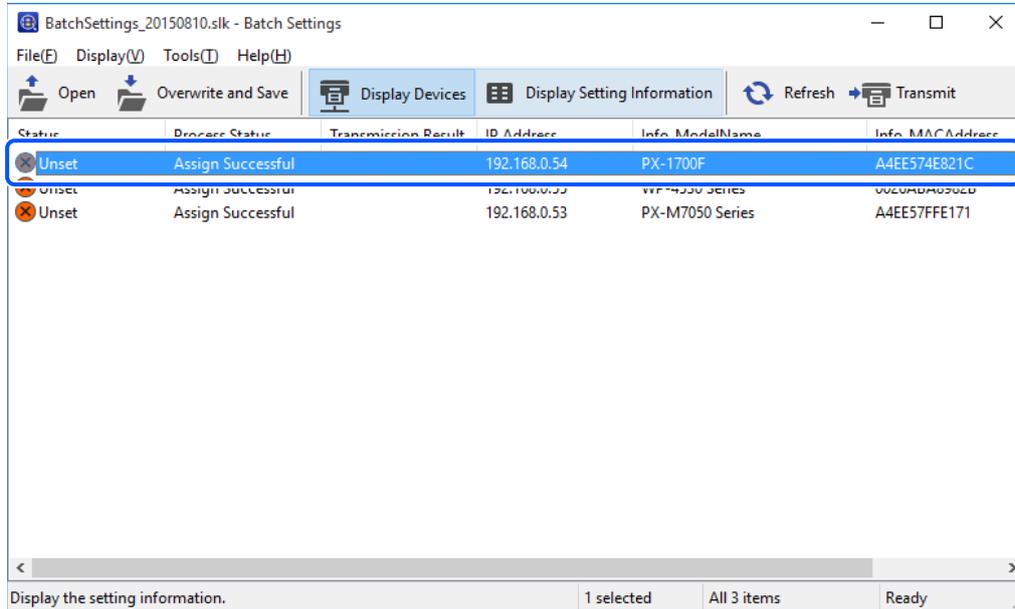


See the following for detailed information on the Batch Settings screen.

Epson Device Admin Help "Batch Settings Screen"

- Click **Transmit**.

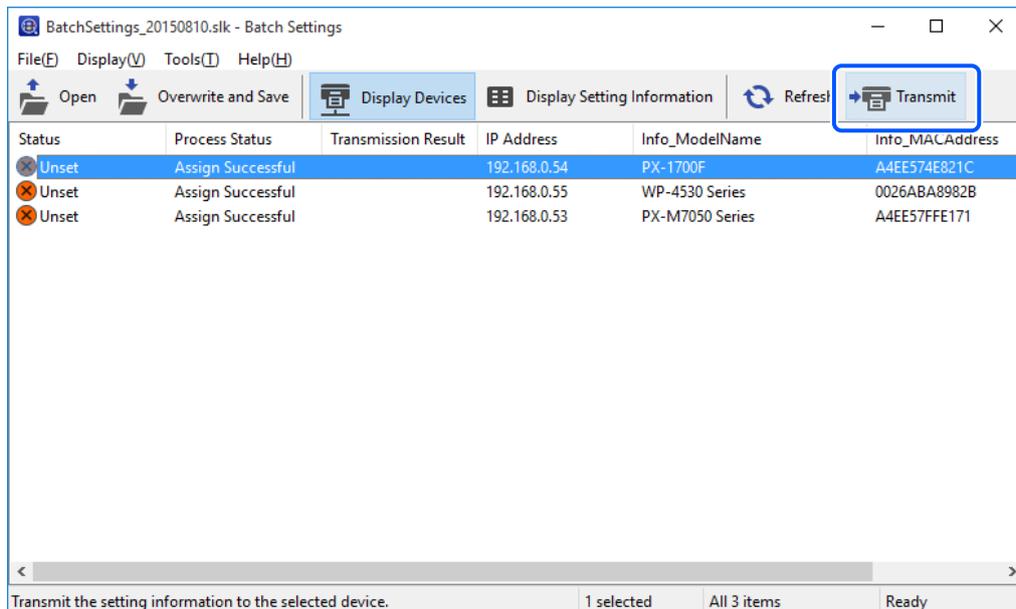


- When the password entry screen is displayed, enter the password, and then click **OK**.
Transmit the settings.

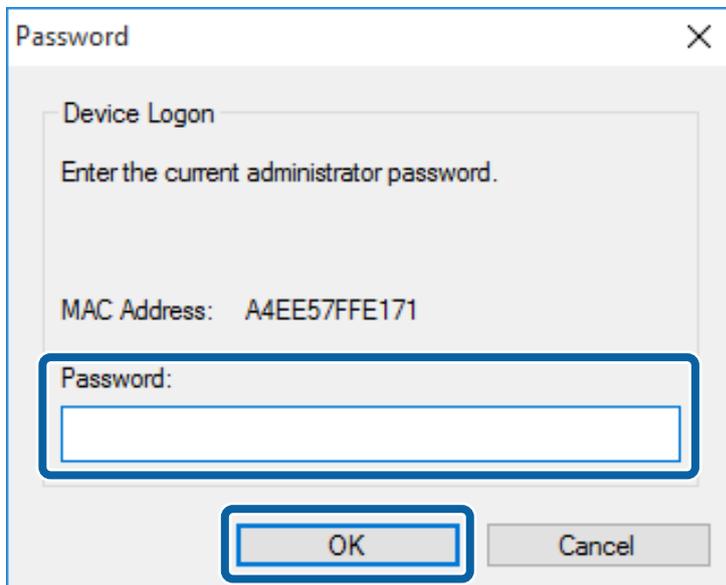

Note:

- A progress meter is displayed while the information is transmitted to the network interface. Do not turn off the device or the wireless adapter, and do not send any data to the device.
- See the related information link below to set a password.

- Click **OK**.

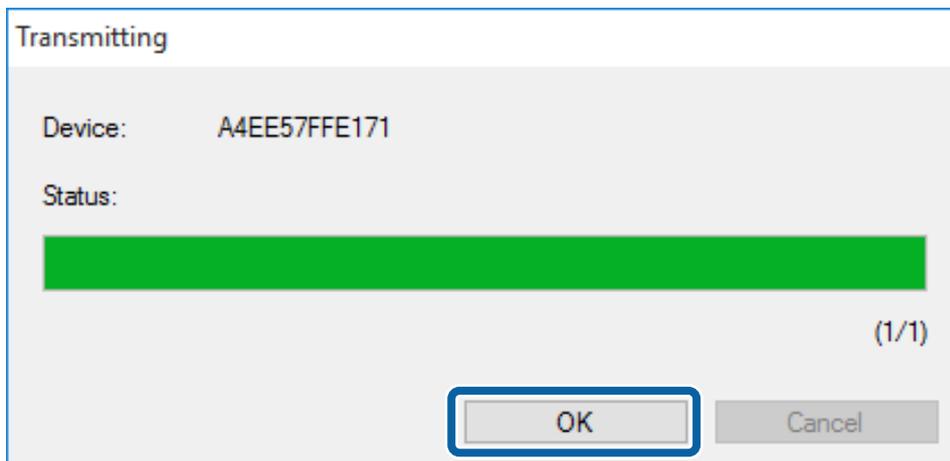


- Check the status of the device you set.

For devices that show  or , check the contents of the settings file, and that the device has rebooted normally.

See the following for detailed information on the Batch Settings screen.

Epson Device Admin Help "Batch Settings Screen"

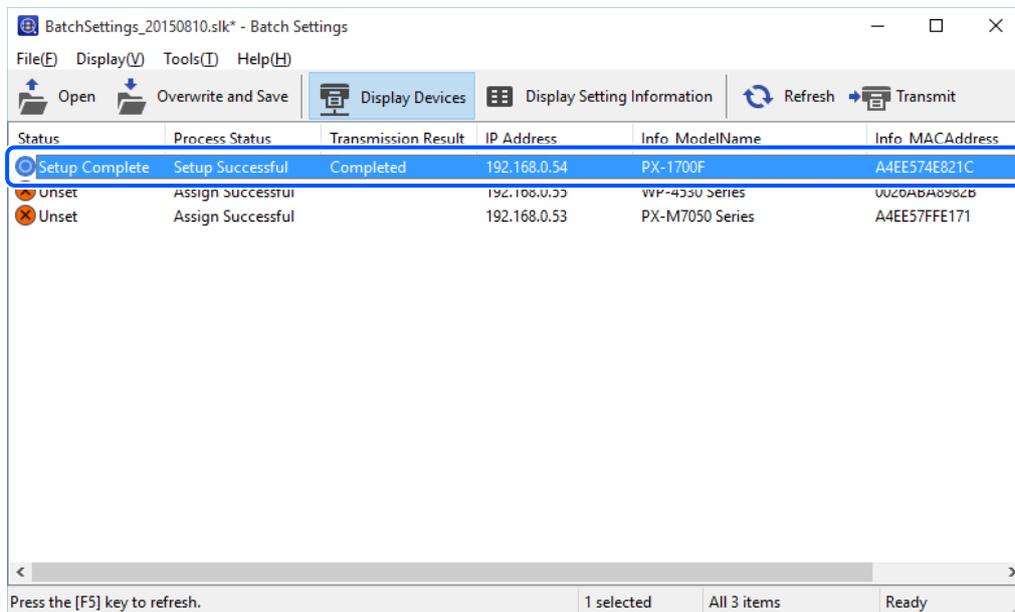

Related Information

- ➔ "Setting Options" on page 24
- ➔ "Setting an Administrator Password" on page 64

Assigning information from settings one at a time (Manually assigned)

Create a file describing the IP address, subnet mask, and the default gateway, and select one device at a time to make settings.

Create a file outlining the settings

1. Open a spreadsheet application (such as Microsoft Excel).
2. Enter "TCPIP_IPAddressAuto", "TCPIP_IPAddress", "TCPIP_SubnetMask", and "TCPIP_Gateway" in the first row as the setting item names.

Enter setting items for the following text strings. To distinguish between upper case/lower case and double-byte/single-byte characters, if only one character is different, the item will not be recognized. Enter the setting item name as described below; otherwise, Epson Device Admin cannot recognize the setting items.

TCPIP_IPAddressAuto	TCPIP_IPAddress	TCPIP_SubnetMask	TCPIP_Gateway

Note:

Create a file without MAC address information. Because the MAC address is automatically set as the key for use by default, information is assigned automatically when a MAC address is found, and manual assignment cannot be performed. You can change the automatically assigned keys for use in **Tools(T) > Options > Auto Assign > Auto Assign Key Settings** on the **Batch Settings** screen.

3. Enter the values in each row.

"TCP/IP_IPAddressAuto" specifies the setting method for assigning the IP address. If the setting value is "5", the static IP address is manually assigned.

TCP/IP_IPAddressAuto	TCP/IP_IPAddress	TCP/IP_SubnetMask	TCP/IP_Gateway
5	192.168.100.102	255.255.255.0	192.168.100.101
5	192.168.100.103	255.255.255.0	192.168.100.101
5	192.168.100.104	255.255.255.0	192.168.100.101


4. Enter a name and save as a SYLK file (*.slk).

Reading the configuration file and making settings one at a time

1. Select **Device** on the side bar task menu.
2. Select the device you want to configure from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

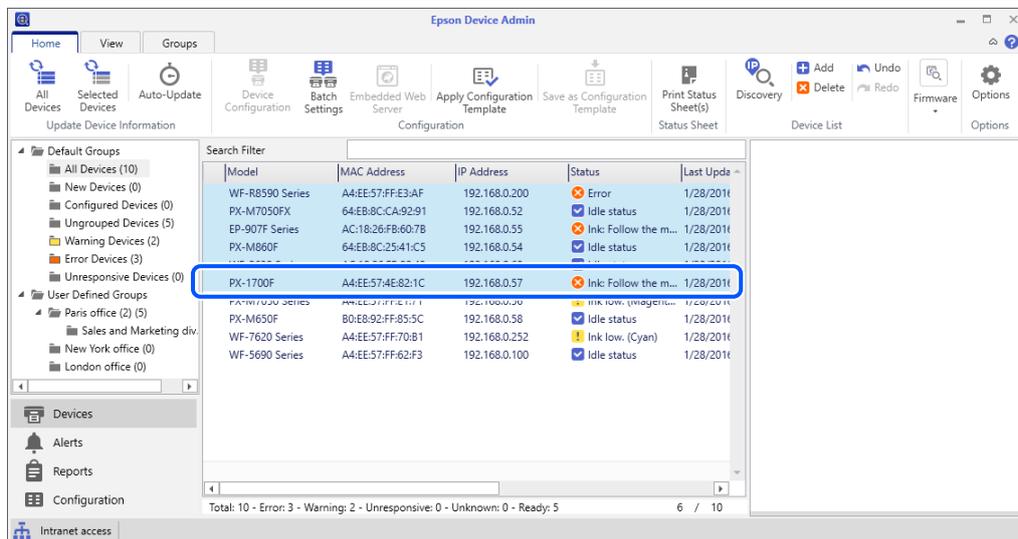


- Click **Batch Settings** on the **Home** tab on the ribbon menu.


Note:

When you select **Use batch configuration** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the Device screen ribbon menu.


See the related information link below for details.

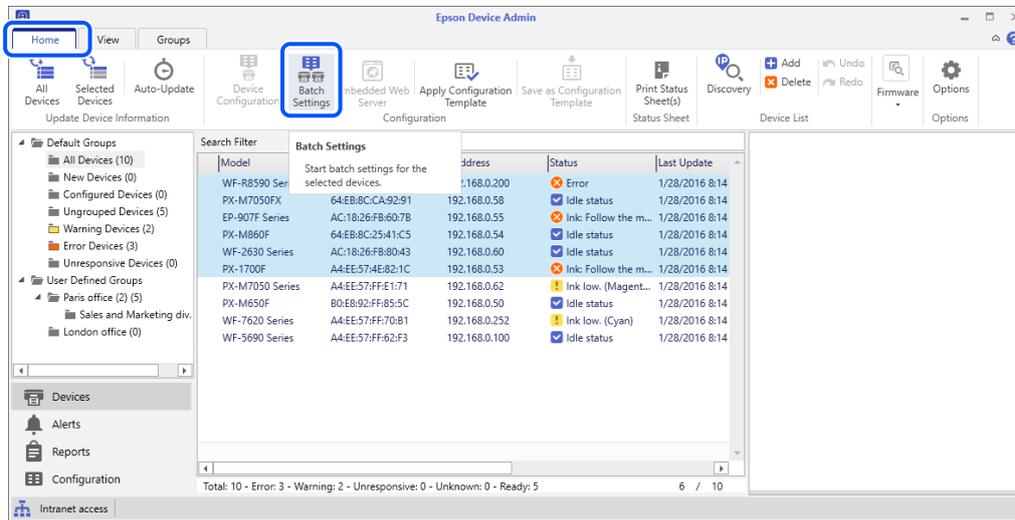

- Click **Open**.

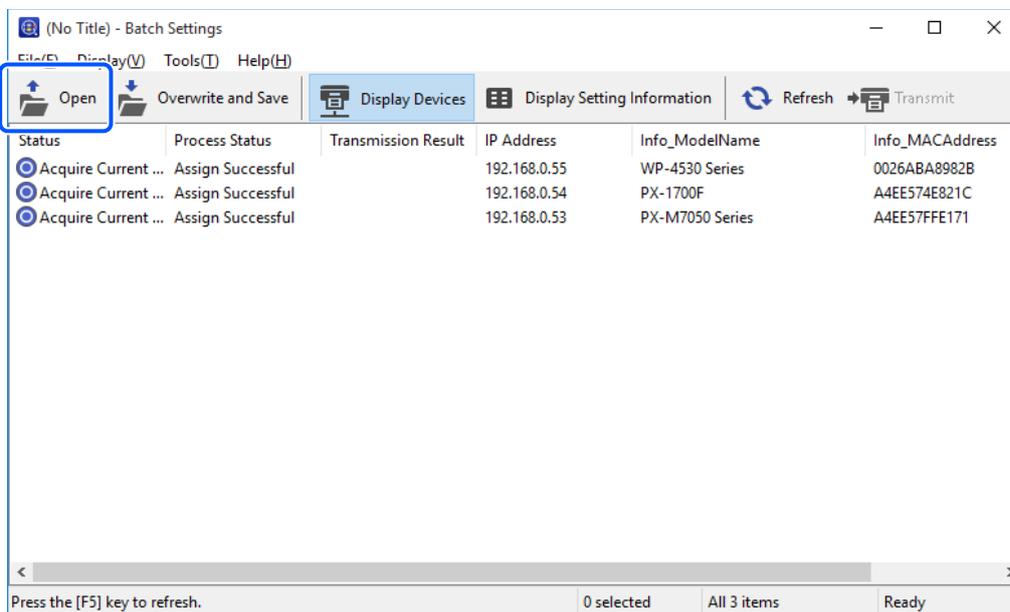


5. Select the SYLK file (*.slk) containing the settings, and then click **Open**.

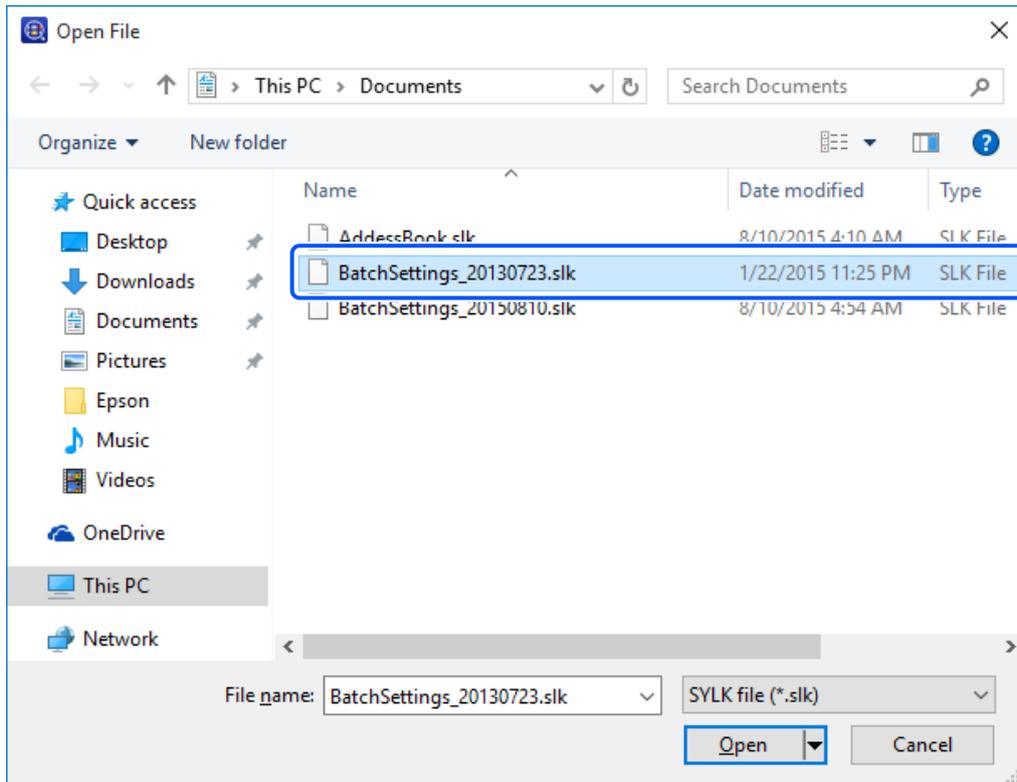


6. Click **Display Devices**, and then select the device you want to set.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

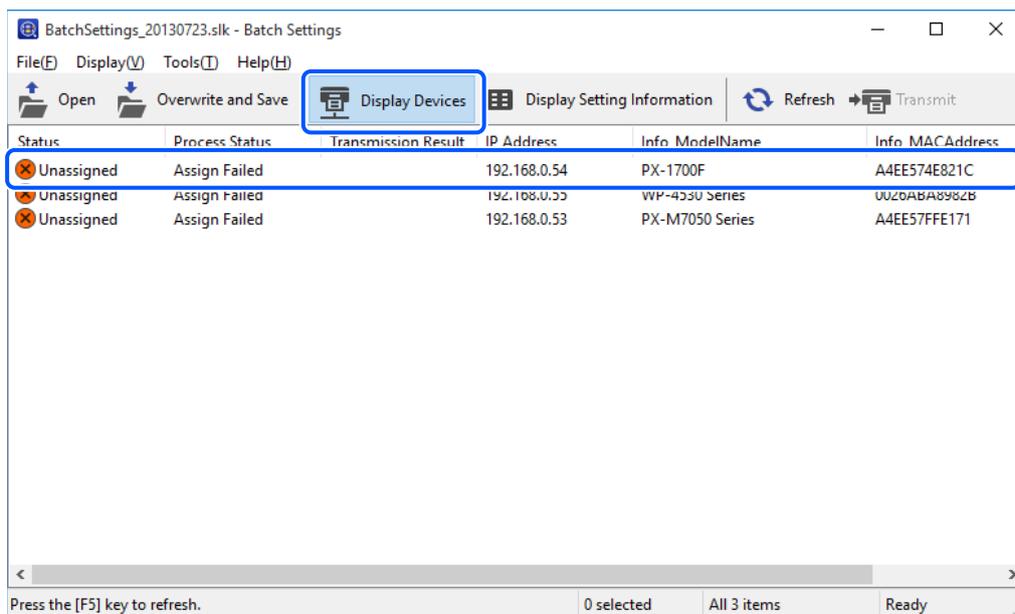


7. Click 'Tools(T) > Manual Assign(M).

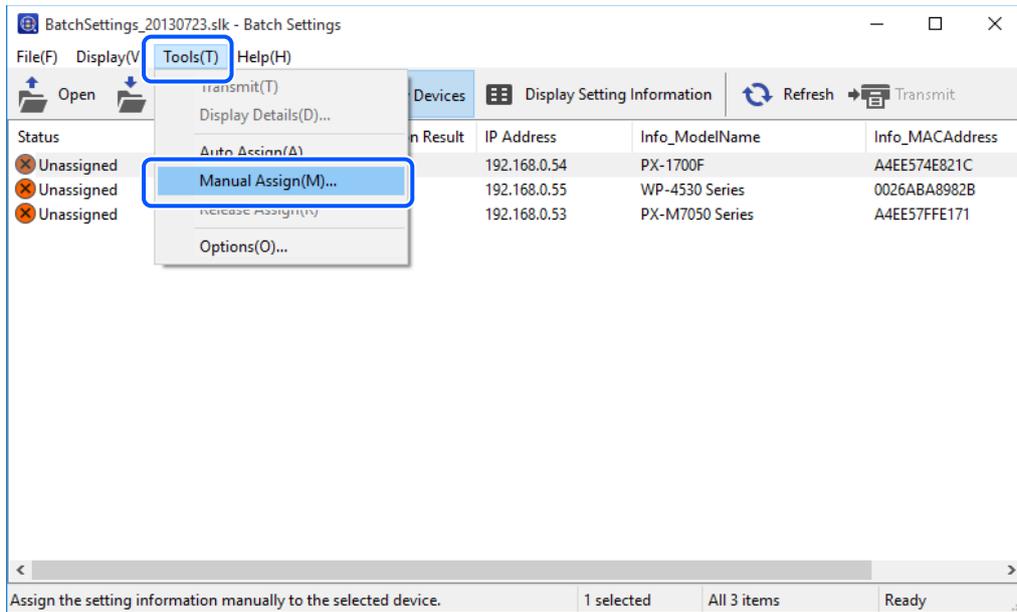


Note:

If you discover a device when the file is open or after opening the file, auto assignment is performed. If the target setting information has already been assigned to other devices, setting information is not displayed on the **Manually assign setting information**. screen. Release the assignments from **Tools(T) > Release Assign(R)**.

8. Select the setting information line you want to assign, and then click OK.

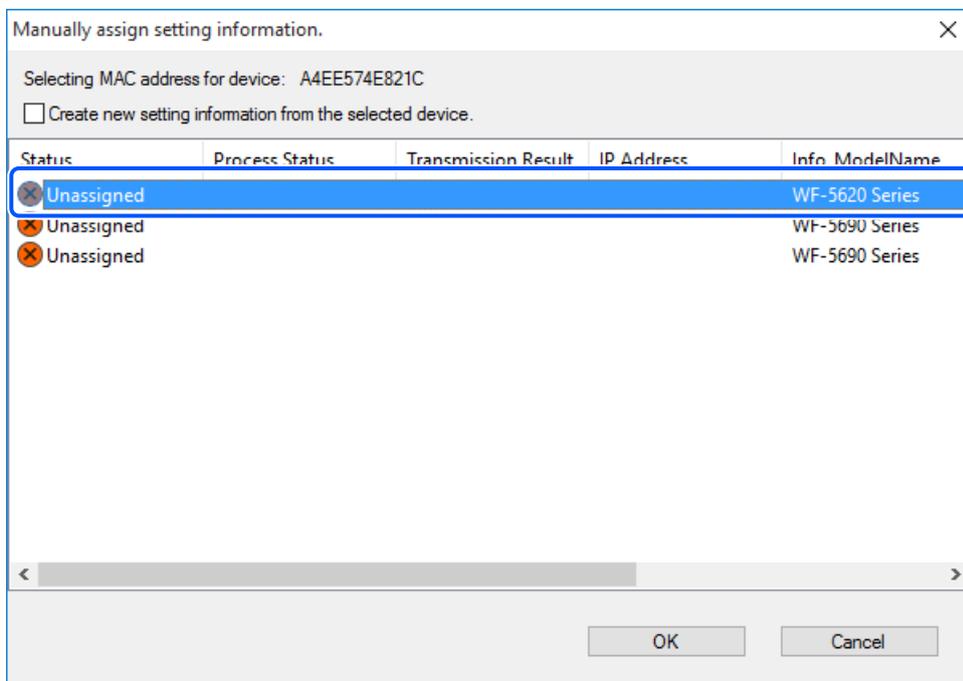

- Check that **Unset** is displayed in the **Status** column and **Assign Successful** is displayed in the **Process Status** column.

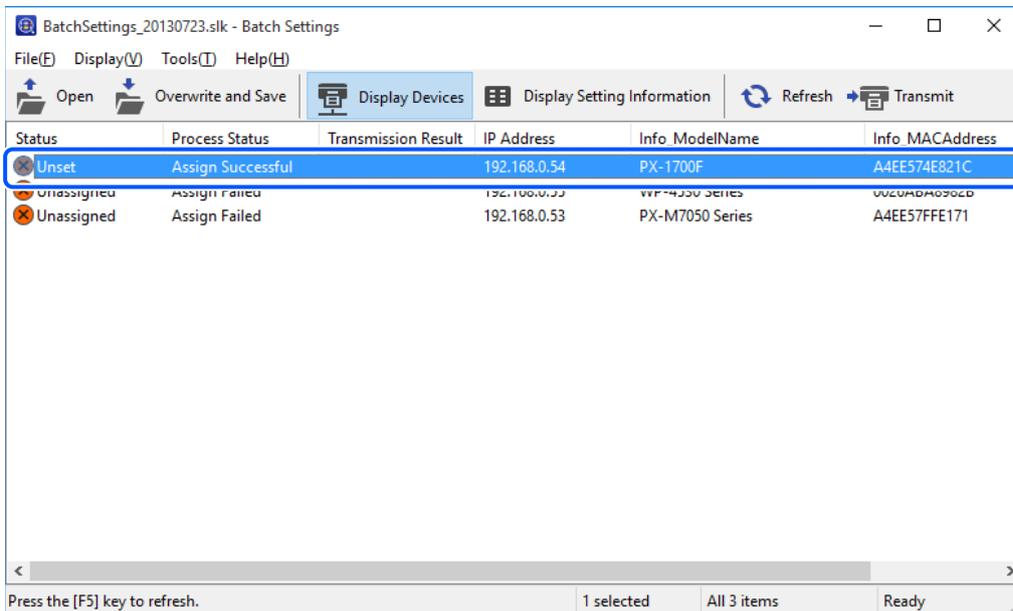

- Click **Transmit**, and then click **OK**.

Related Information

➔ [“Setting Options” on page 24](#)

Creating a SYLK file to describe the settings

You can create a SYLK file to describe information for performing batch settings. You can create a SYLK file using one of the following methods.


Creating a SYLK file by acquiring information from the connected device

- Select **Devices** on the side bar task menu.

2. Select the device you want to configure from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

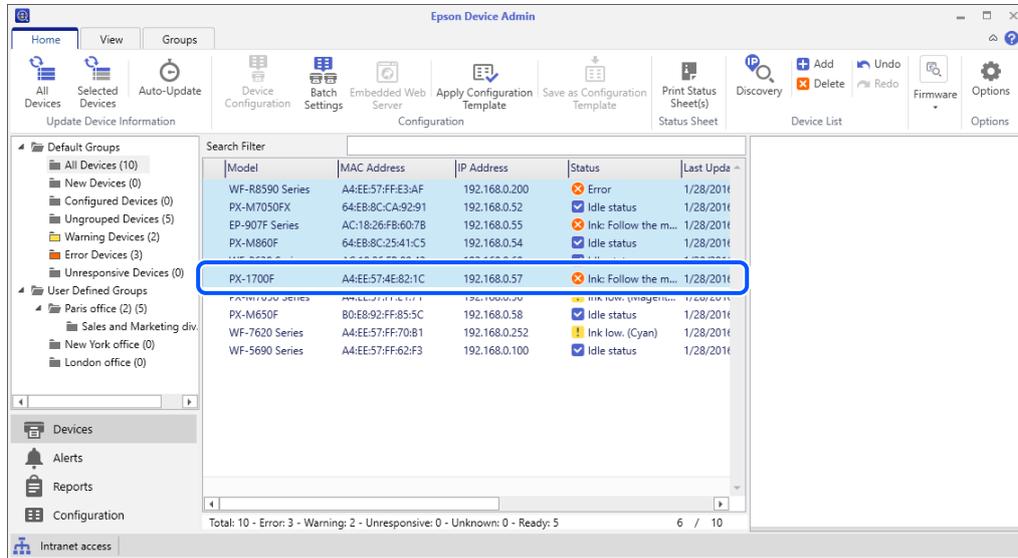


3. Click **Batch Settings** on the **Home** tab on the ribbon menu.


Note:

When you select **Use batch configuration** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the Device screen ribbon menu.


See the related information link below for details.

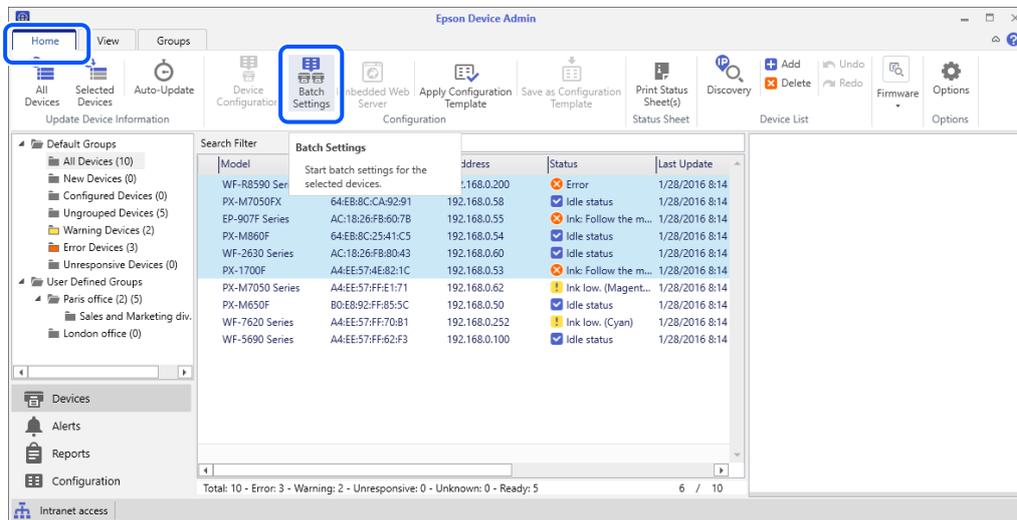

4. Click **File > Save As(A)**.

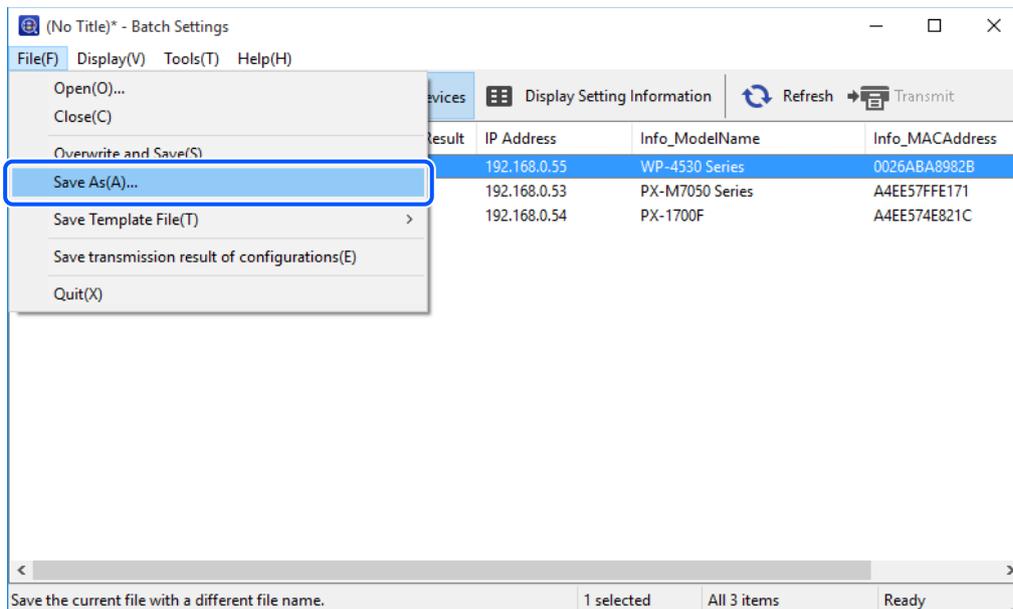

5. Enter the file name and select the target folder, and then click **Save**.
A backup file (*.slk) containing the current settings for all devices is created.

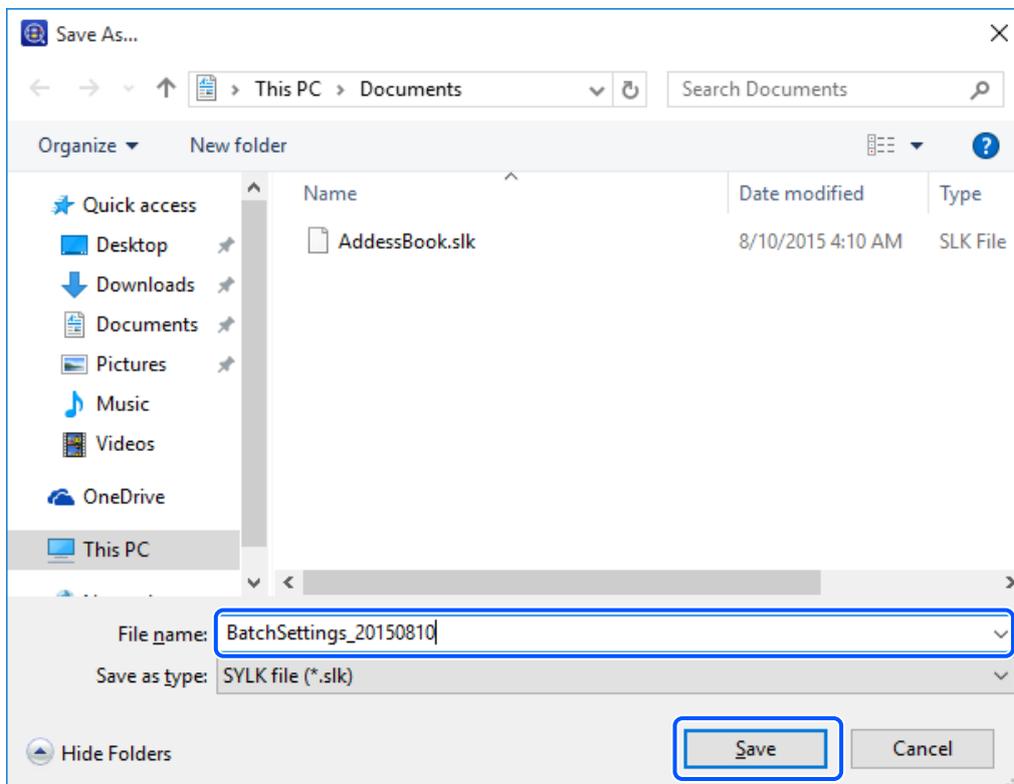

- Open the saved SYLK file in a spreadsheet application (such as Microsoft Excel) or in a text editor.

Setting information is entered in each row. Each row contains the settings for each individual device. Explanations for the setting items is provided on the related information link below.

	1	2	3	4	5	6	7	8
	Info_ModelName	Info_MACAddress	Info_CommonDevic	Info_CommonLocat	Info_SerialNumber	TCPIP_IPAddressA	TCPIP_IPType_APIF	TCPIP_IPAddress
2	WP-4530 Series	0026ABA8982B		Hino	NXL4000267	1	1	10.12.24.94
3	PX-1700F	A4EE574E821C			#NULL#	1	1	10.12.25.25
4	PX-M7050 Series	A4EE57FFE171		Hino	1BE9000046	1	1	192.168.0.151
5								
6								

- You can change settings or add a new row and enter setting information for a new device, and then save the file.

	1	2	3	4	5	6	7	8
	Info_ModelName	Info_MACAddress	Info_CommonDevic	Info_CommonLocat	Info_SerialNumber	TCPIP_IPAddressA	TCPIP_IPType_APIF	TCPIP_IPAddress
2	WP-4530 Series	0026ABA8982B		Hino	NXL4000267	1	1	10.12.24.94
3	PX-1700F	A4EE574E821C			#NULL#	1	1	10.12.25.25
4	PX-M7050 Series	A4EE57FFE171		Hino	1BE9000046	1	1	192.168.0.151
5								
6								

Note:

Security items, such as passwords, or read-only items are not output. When making a batch change to the Administrator Password, add an "AdminNewPassword" column to the SYLK file, and then enter the new password. Also, if you want to automatically authorize the new password (without having to enter a password confirmation), add a column called "AdminCurrentPassword".

Related Information

- ➔ [“Setting Options” on page 24](#)
- ➔ [“Setting items for the SYLK file” on page 168](#)

Creating a SYLK file based on a template


This section explains how to create a SYLK file based on a TCP/IP template.

- Select **Devices** on the side bar task menu.

2. Select the device you want to configure from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

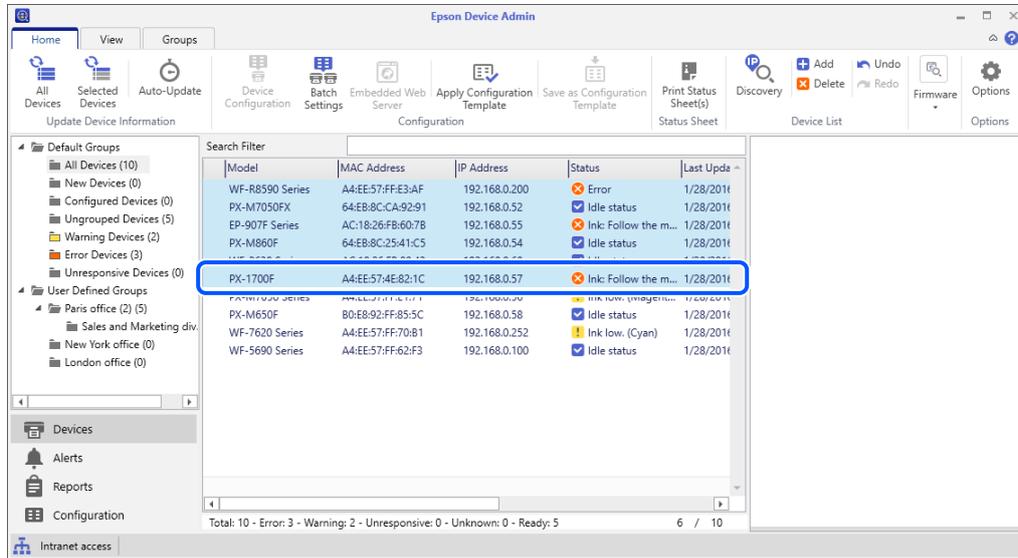


3. Click **Batch Settings** on the **Home** tab on the ribbon menu.


Note:

When you select **Use batch configuration** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the **Device** screen ribbon menu.


See the related information link below for details.

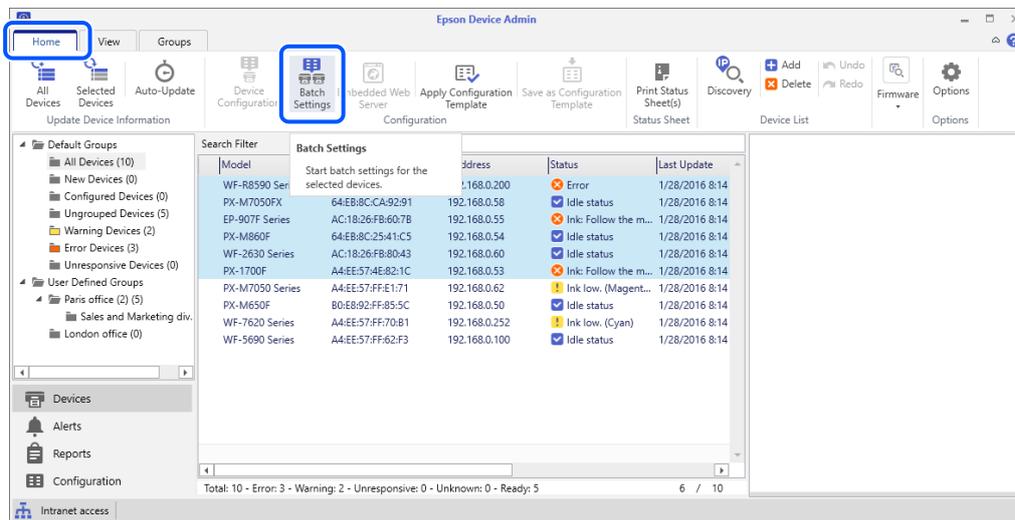

4. Click **File > Save Template File(T) > TCP/IP settings**.

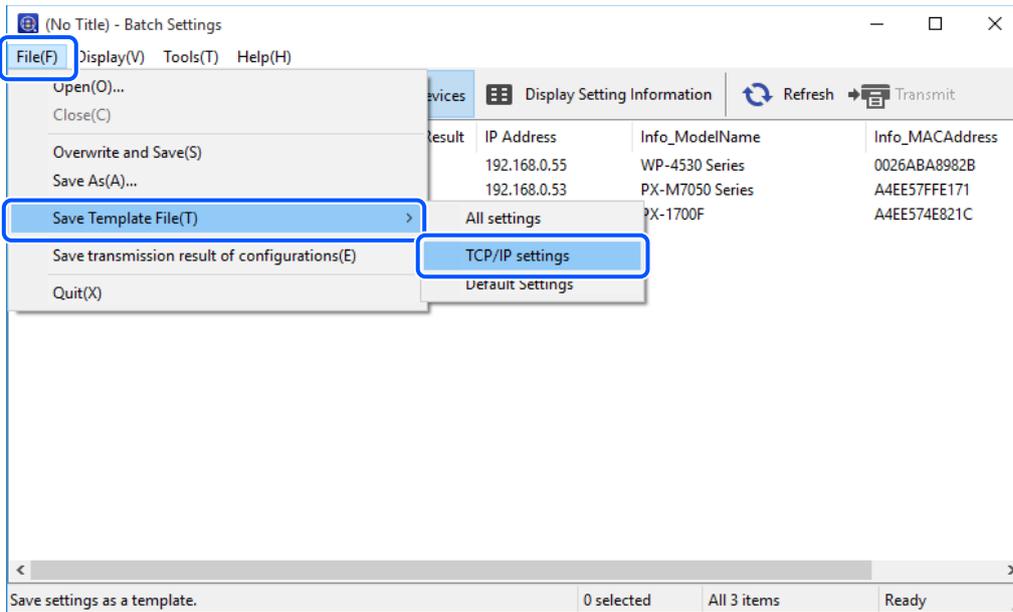

5. Enter the file name and select the target folder, and then click **Save**.
A SYLK file (*.slk) containing the TCP/IP related items written is created.

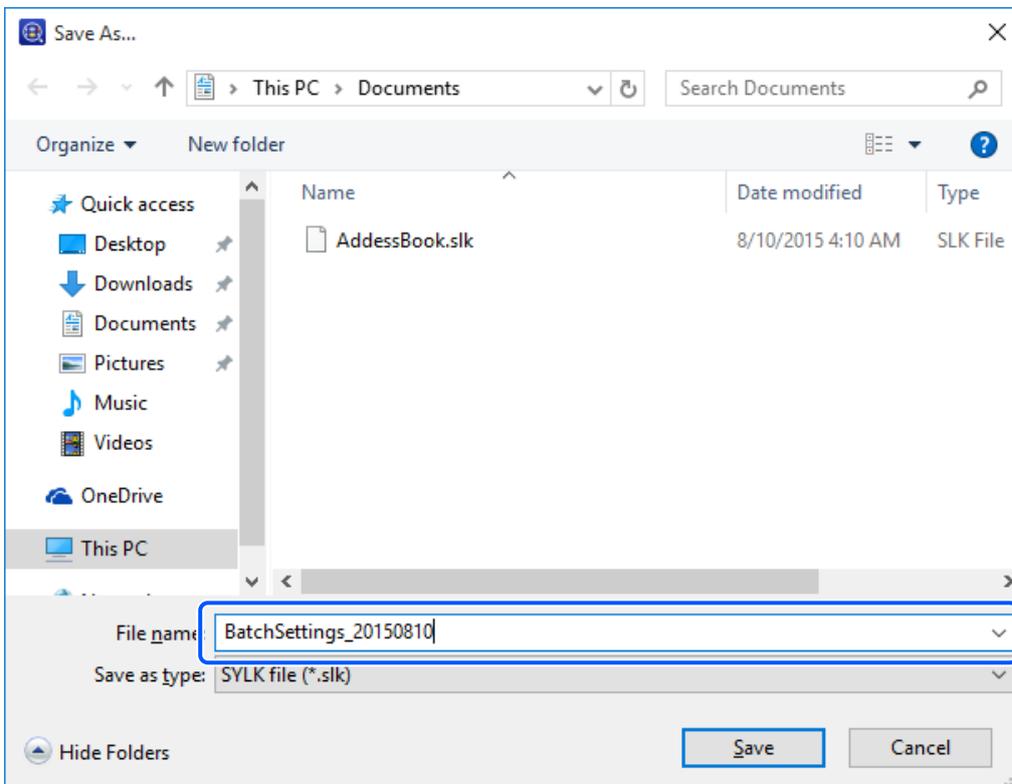

6. Open the saved SYLK file in a spreadsheet application (such as Microsoft Excel) or in a text editor.
Enter the MAC address and values such as IP address, subnet mask, and default gateway for each row.

See the related information link below for details on each setting item.

	1	2	3	4	5	6	7	8
1	Info_ModelName	Info_MACAddress	Info_CommonDevic	Info_CommonLocat	Info_SerialNumber	TCPIP_IPAddressAu	TCPIP_IPType_API	TCPIP_IPAddress
2	WP-4530 Series	0026ABA8982B		Hino	NXL4000267	1	1	10.12.24.94
3	PX-1700F	A4EE574E821C			#NULL#	1	1	10.12.25.25
4	PX-M7050 Series	A4EE57FFE171		Hino	1BE9000046	1	1	192.168.0.151
5								
6								

Note:

If you do not want to set a value, enter "#NULL#".

7. Save the file.

Related Information

- ➔ ["Setting Options" on page 24](#)
- ➔ ["Setting items for the SYLK file" on page 168](#)

Creating a new SYLK file

Using the MAC address and model name as the keys, you can create a new SYLK file to set the IP address.

1. Open a spreadsheet application (such as Microsoft Excel).
2. Enter "Info_MACAddress", "Info_ModelName", and "TCPIP_IPAddress" in the first row as the setting item names.

Enter setting items for the following text strings. To distinguish between upper case/lower case and double-byte/single-byte characters, if only one character is different, the item will not be recognized. Enter the setting item name as described below; otherwise, Epson Device Admin cannot recognize the setting items.

Info_MACAddress	Info_ModelName	TCPIP_IPAddress

3. Enter the MAC address, model name, and IP address for each network interface.

Info_MACAddress	Info_ModelName	TCPIP_IPAddress
0000XXXX0001	ALC-XXXXX	192.168.100.102
0000XXXX0002	ALC-XXXXX	192.168.100.103
0000XXXX0003	ALC-XXXXX	192.168.100.104

4. Enter a name and save as a SYLK file (*.slk).

Backing up device settings

You can backup device settings by using the batch setting function.

Output a device setting value as a SYLK file.

Note:


When you select **Use batch configuration** in **Options > Customize Ribbon**, the **Batch Settings** button is displayed on the **Device** screen ribbon menu.

See the related information link below for details.


1. Select **Devices** on the side bar task menu.
2. Select the device you want to backup from the device list.

Note:

To make multiple selections, press **Ctrl** or **Shift** and click your mouse.

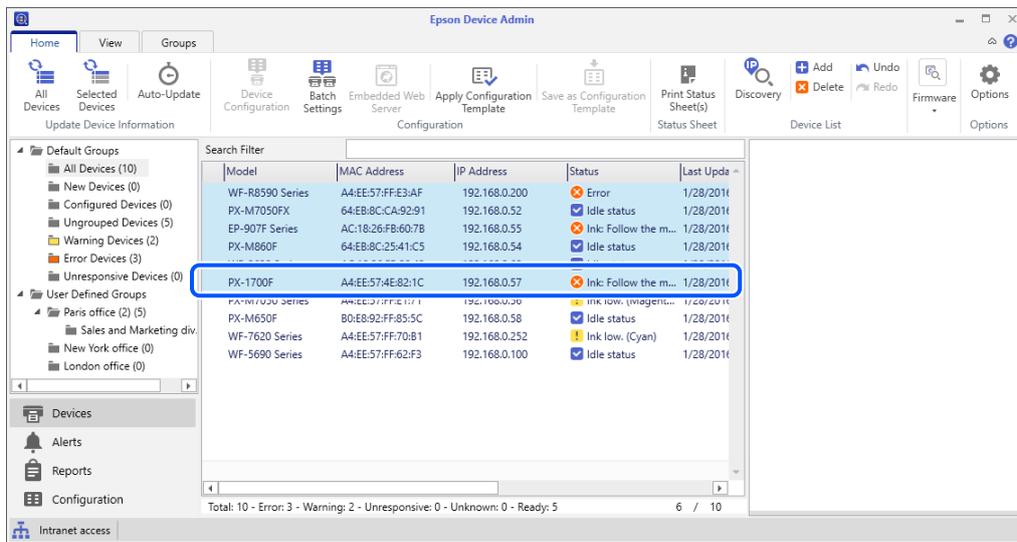


3. Click **Batch Settings** on the **Home** tab on the ribbon menu.

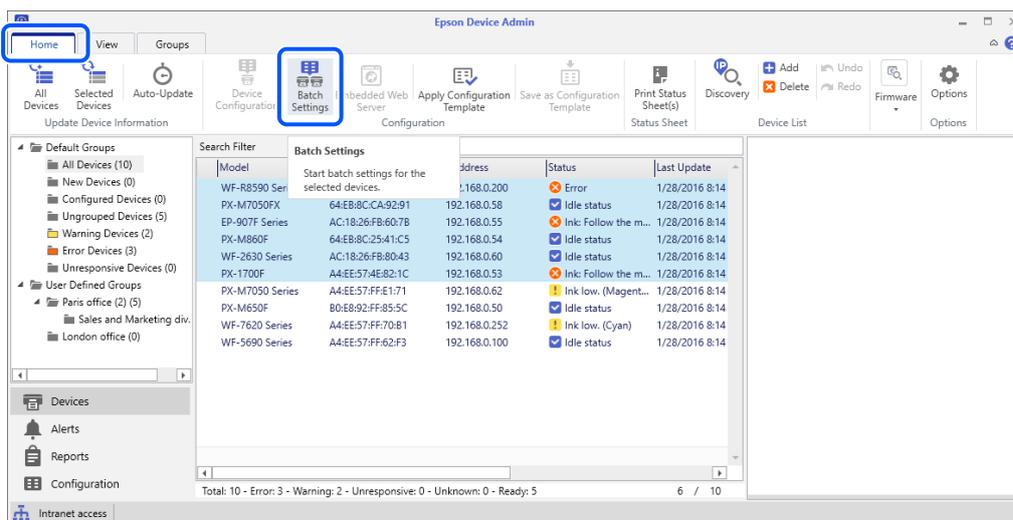


Note:


Select the devices for which you do not want to create a backup file, and then click **Tools(T) > Release Assign(R)**. Click **Yes** when the confirmation message is displayed, and the **Status** column changes to **Unassigned**.

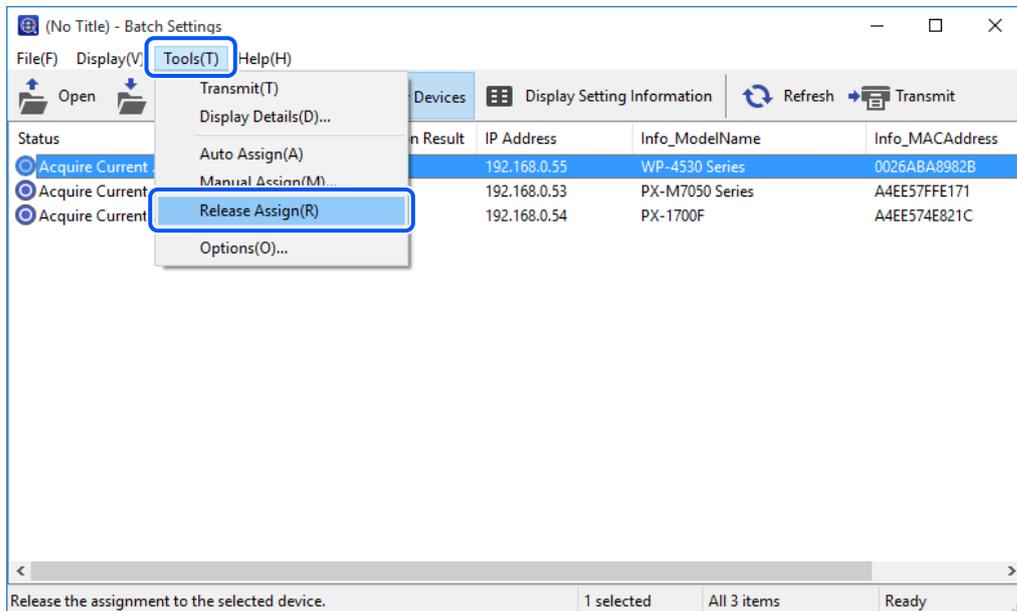

4. Click **File > Save As(A)**.

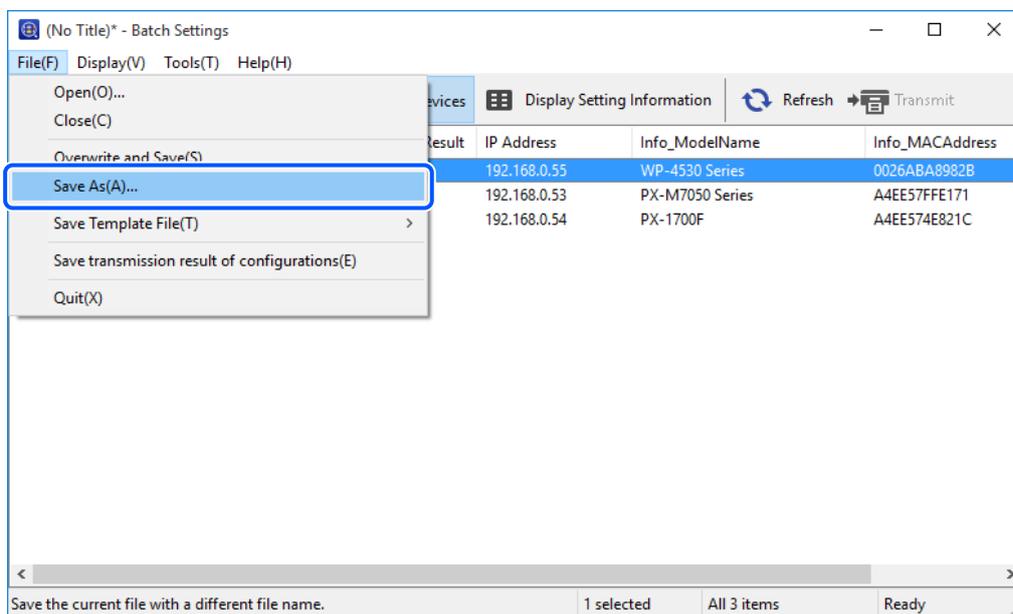

- Enter the file name and select the target folder, and then click **Save**.
A backup file (*.slk) containing the selected device settings is created.

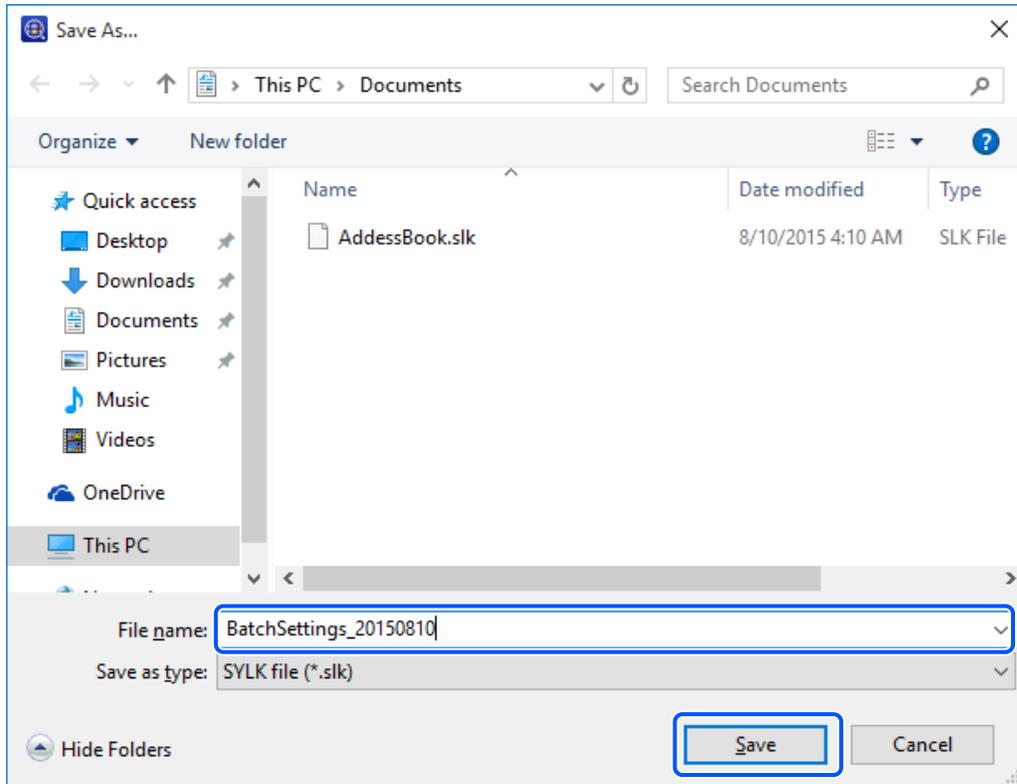

Related Information

➔ [“Setting Options” on page 24](#)

Setting items for the SYLK file

This section explains the main settings that can be set in the SYLK file.

Item	Description
Info_SerialNumber	Displays the serial number of a device. This value is acquired from the device. The device is not affected by changing the value.
Info_MACAddress	Displays the MAC address of a device. This value is acquired from the device. The device is not affected by changing the value.
Info_ModelName	Displays the model name of a device. This value is acquired from the device. The device is not affected by changing the value.
Info_Software.X.Category (X:1 to 50)	Displays information on the device's software. This value is acquired from the device. The device is not affected by changing the value.
Info_Software.X.Name (X:1 to 50)	Displays information on the device's software. This value is acquired from the device. The device is not affected by changing the value.

Item	Description
Info_Software.X.Version (X:1 to 50)	<p>Displays information on the device's software.</p> <p>This value is acquired from the device. The device is not affected by changing the value.</p>
Info_Software.X.Vendor (X:1 to 50)	<p>Displays information on the device's software.</p> <p>This value is acquired from the device. The device is not affected by changing the value.</p>
Info_CommonDevice	<p>Enter a device name to use as a common protocol.</p> <p>Enter between 2 and 15 characters using A-Z, a-z, 0-9, and hyphens (-). You can only use letters for the first character. You cannot use a hyphen for the final character.</p> <p>You cannot use the following operations and values.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Automatically acquiring DNS host name <input type="checkbox"/> Exceeding 251 characters for the host name or the domain name.
Info_CommonLocation	<p>Enter information to identify the device. For example, where the device is located.</p> <p>You can use characters other than ASCII control codes.</p> <p>The number of characters you can enter varies depending on the product.</p>
TCPIP_IPAddressAuto	<p>Specify whether the IP address is set manually or automatically.</p> <p>1: Auto</p> <p>5: Manual</p>
TCPIP_IPType_BOOTP	<p>Specify whether you want to set the IP address automatically with BOOTP.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: OFF.</p> <p>1: ON</p> <p>0: OFF</p>
TCPIP_IPType_RARP	<p>Specify whether you want to set the IP address automatically with RARP.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: OFF.</p> <p>1: ON</p> <p>0: OFF</p>
TCPIP_IPType_APIPA	<p>Specify whether you want to set the IP address automatically with APIPA.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: OFF.</p> <p>1: ON</p> <p>0: OFF</p>
TCPIP_IPType_PING	<p>Specify whether you want to set the IP address automatically with PING.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: OFF.</p> <p>1: ON</p> <p>0: OFF</p>

Item	Description
TCPIP_IPAddress	<p>Specify the IP address in IPv4 format.</p> <p>You cannot use the following addresses.</p> <p>0.0.0.0</p> <p>255.255.255.255</p> <p>127.0.0.1</p> <p>224.0.0.0 to 239.255.255.255</p>
TCPIP_SubnetMask	<p>Specify the subnet mask in IPv4 format.</p> <p>You cannot use the following addresses.</p> <p>0.0.0.0</p> <p>255.255.255.255</p>
TCPIP_Gateway	<p>Specify the default gateway in IPv4 format.</p> <p>You cannot use the following addresses.</p> <p>255.255.255.255</p> <p>224.0.0.0 to 239.255.255.255</p>
TCPIP_DNS_AddressAuto	<p>Specify whether you want to obtain the DNS server address manually or automatically.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: Manual.</p> <p>0: Manual</p> <p>1: Auto</p>
TCPIP_DNS_Server.1 to TCPIP_DNS_Server.N	<p>Specify 1 to N as the number of DNS server addresses that can be registered to the device in IPv4 format.</p> <p>You cannot use the following addresses.</p> <p>255.255.255.255</p> <p>0.0.0.0</p>
TCPIP_DNS_HostDomainAuto	<p>Specify whether you want to obtain the DNS host name and domain name manually or automatically.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: Manual.</p> <p>0: Manual</p> <p>1: Auto</p>
TCPIP_DNS_HostAuto	<p>Specify whether you want to obtain the DNS host name manually or automatically.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: Manual.</p> <p>0: Manual</p> <p>1: Auto</p>
TCPIP_DNS_DomainAuto	<p>Specify whether you want to obtain the DNS domain name manually or automatically.</p> <p>When TCPIP_IPAddressAuto is set to 5: Manual, this value is fixed at 0: Manual.</p> <p>0: Manual</p> <p>1: Auto</p>

Item	Description
TCPIP_DNS_HostName	<p>Enter a DNS host name.</p> <p>Enter between 2 and 63 characters using A-Z, a-z, 0-9, hyphens (-), and dots (.). You can only use letters for the first character. You cannot use a hyphen or a dot for the final character.</p> <p>This value is invalid if the total number of characters of the host name and the domain name exceeds 251.</p>
TCPIP_DNS_DomainName	<p>Enter a DNS name.</p> <p>Enter between 2 and 249 characters using A-Z, a-z, 0-9, hyphens (-), and dots (.). You can only use letters for the first character. You cannot use a hyphen or a dot for the final character.</p> <p>You cannot use the following values.</p> <ul style="list-style-type: none"> <input type="checkbox"/> Using more than one dot in a row (for example ..) <input type="checkbox"/> Exceeding 251 characters for the host name or the domain name.
TCPIP_DNS_DNSRegist	<p>Specify whether you want to register the network interface address for the DNS server.</p> <p>0: Do not register</p> <p>1: Register</p>
TCPIP_DNS_DirectRegist	<p>Specify how to register the network interface address to the DNS server.</p> <p>0: Relay the DHCP</p> <p>1: Register directly</p>
TCPIP_EnableBonjour	<p>Specify whether to use Bonjour.</p> <p>0: Disable</p> <p>1: Enable</p>
TCPIP_BonjourName	<p>Specify the Bonjour name.</p> <p>Enter between 2 and 53 characters using A-Z, a-z, 0-9, and hyphens (-). You can only use letters for the first character. You cannot use a hyphen for the final character.</p>
TCPIP_BonjourPrinterName	<p>Specify the Bonjour service or Bonjour printer name.</p> <p>Enter between 1 and 41 characters using A-Z a-z 0-9 !"#%&'()*+,-./:;<=>?@[\\]^_`{ }~ and space.</p>
EnableMSNet	<p>Specify whether to use Microsoft network shared printing.</p> <p>0: Disable</p> <p>1: Enable</p>
MSNet_HostName	<p>Specify the host name of an MS Network.</p> <p>Enter between 1 and 15 characters using A-Z a-z 0-9 !#\$%&'()*-.^_{}~ and space.</p>
MSNet_WorkGroupName	<p>Specify the Workgroup name of an MS Network or domain name.</p> <p>Enter between 1 and 15 characters using A-Z a-z 0-9 !#\$%&'()*-.^_{}~ and space.</p>
EnableAppleTalk	<p>Specify whether to use AppleTalk.</p> <p>0: Disable</p> <p>1: Enable</p>

Item	Description
NetIF_EnableTimeServer	Specify whether to use the time server. 0: Do not use 1: Use
NetIF_TimeServer	Specify the address of the time server. The format you can enter varies depending on the server.
NetIF_TimeServerInterval	Specify the interval for updating the time server information in seconds. Enter a value between 1 and 1440 in integral numbers.
NetIF_TimeServerStatus	Displays the communication status of the time server. This value is acquired from the device. The device is not affected by changing the value.
USB_HostIF	Specify whether to use the USB host I/F. 3: On 4: Off
USB_IF	Specify whether to use the USB I/F. 3: On 4: Off
Admin_UserName	Specify the administrator name for the device. Enter an administrator name between 1 and 255 characters except for ASCII control code.
Admin_PanelLock	Specify whether to enable panel operations. 3: Enable 4: Disable
AdminCurrentPassword	Enter the current password when you want to change the administrator password using automatic authentication.
AdminNewPassword	Specify an administrator password of the device. Enter between 1 and 20 characters using A-Z a-z 0-9 !"#%&'()*+,-./:;~ and space. When an administrator password is set for device, you need to enter the current password.
NICResetCmd	Reset device settings to their defaults. True: Reset device settings to factory defaults

Note:

Available items vary depending on the device. #NULL# is entered for setting items that are not supported.

Copyright and Trademarks

- Microsoft, Windows, Windows Server, Excel, and Microsoft Edge are trademarks of the Microsoft group of companies.
- Google Chrome is a trademark of Google LLC.
- General Notice: All other trademarks are the property of their respective owners and used for identification purposes only.

©2023-2026 Seiko Epson Corporation

Notices

- Reproduction of information in this manual is prohibited.
- All information in this manual is subject to change without notice.
- If you find inaccuracies or have concerns about this manual, contact Epson.
- Notwithstanding the preceding article, Epson cannot be held responsible for any effects resulting from the use of the product.
- Epson cannot be held responsible for any failures caused by the improper use of the product and the improper repair of the product by a third party.