

วิธีการติดตั้งไดรเวอร์เครื่องพิมพ์ รุ่น L310 เชื่อมต่อแบบ USB สำหรับ Mac OS X

หมายเหตุ


1. เปิดเครื่องพิมพ์และเชื่อมต่อสาย USB ระหว่างเครื่องพิมพ์กับคอมพิวเตอร์ก่อน
2. เชื่อมต่อสัญญาณอินเทอร์เน็ต

วิธีการติดตั้งไดรเวอร์


1. ใส่แผ่นซีดีไดรเวอร์ และดับเบิลคลิกที่ รูปแผ่นซีดี EPSON



2. ดับเบิลคลิกที่ โฟลเดอร์ EPSON

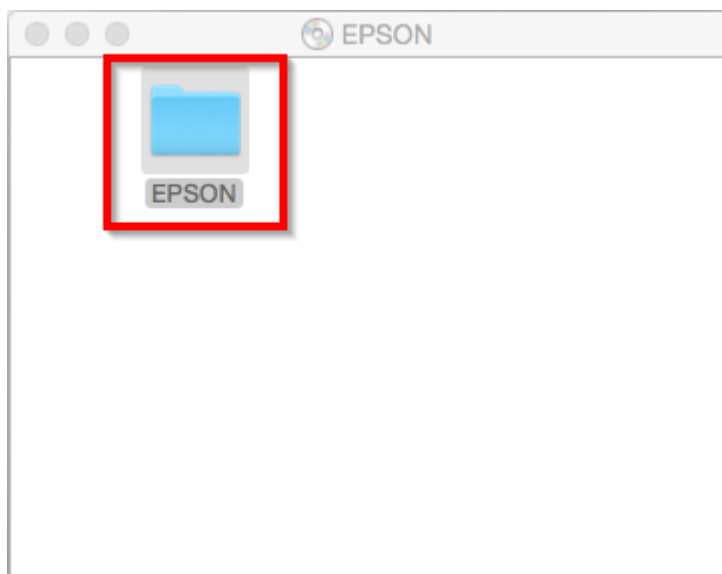


3. ดับเบิลคลิกที่ Setup Navi

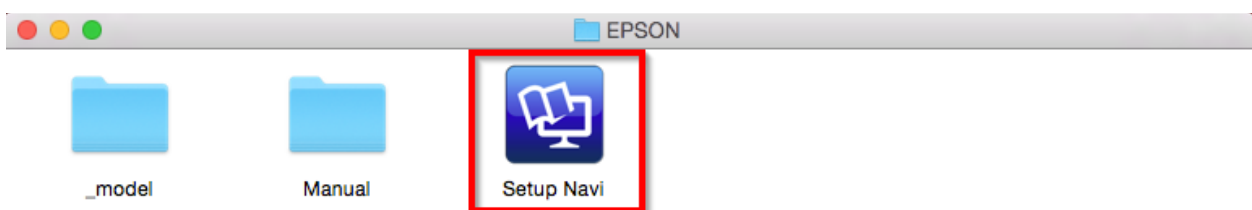

4. จะปรากฏหน้าต่างดังภาพ ตรงช่องค้นหาให้พิมพ์ **L310** และ **กดค้นหา**



5. จะปรากฏหน้าต่างดังภาพ คลิกที่ **Let's get started**

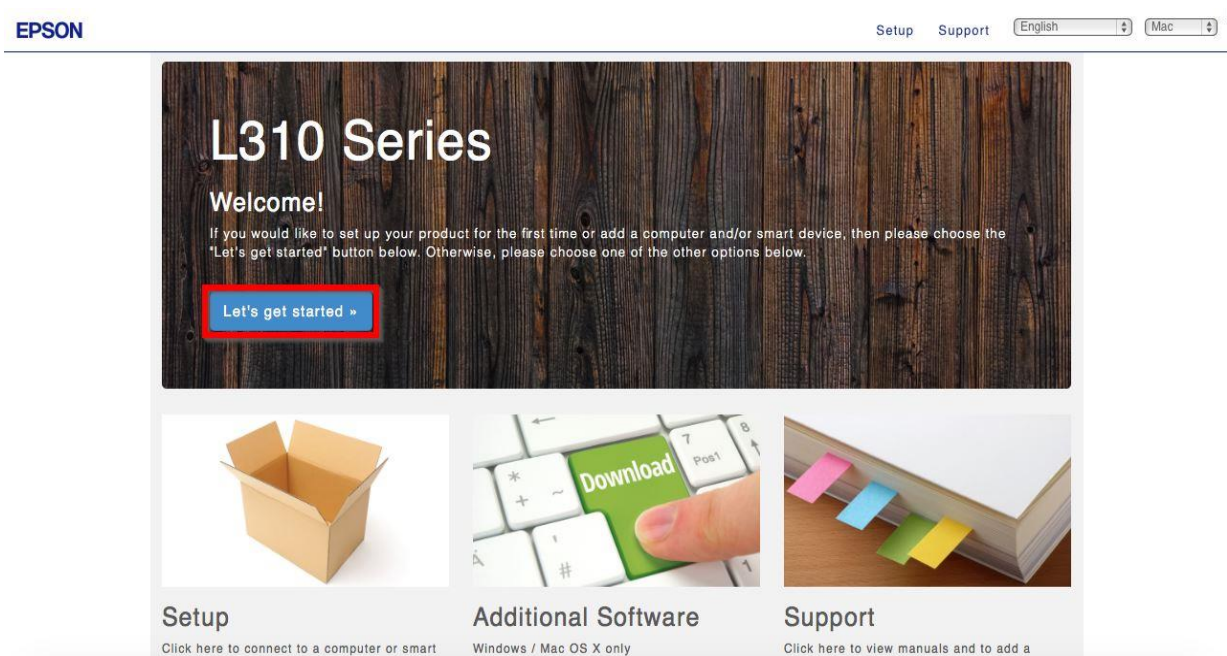

6. คลิก **Download**

Setup for the L310 Series

Follow the steps below to set up your printer for the first time or when adding a computer to a printer already set up.

1 Prepare your Printer
Prepare your printer for first time setup.
[View »](#)

2 Download and Connect
Once you have downloaded the free software for your device, you can then begin the connection to your printer.
[Download »](#)
Double-click downloaded Epson_xxx.dmg, then run the software.

3 More Devices?
You can add more computers and smart devices. Go to the following site <http://epson.sn> from the new device!


7. จะได้ไฟล์ติดตั้งมา ให้ ดับเบิลคลิก **ไฟล์ติดตั้ง**




8. จะปรากฏหน้าต่างดังภาพ ดับเบิลคลิกที่ **Install Navi**



9. หากปรากฏหน้าต่างดังภาพ คลิก **Don't warn me when opening application on this disk image** หลังจากนั้นคลิก **Open**

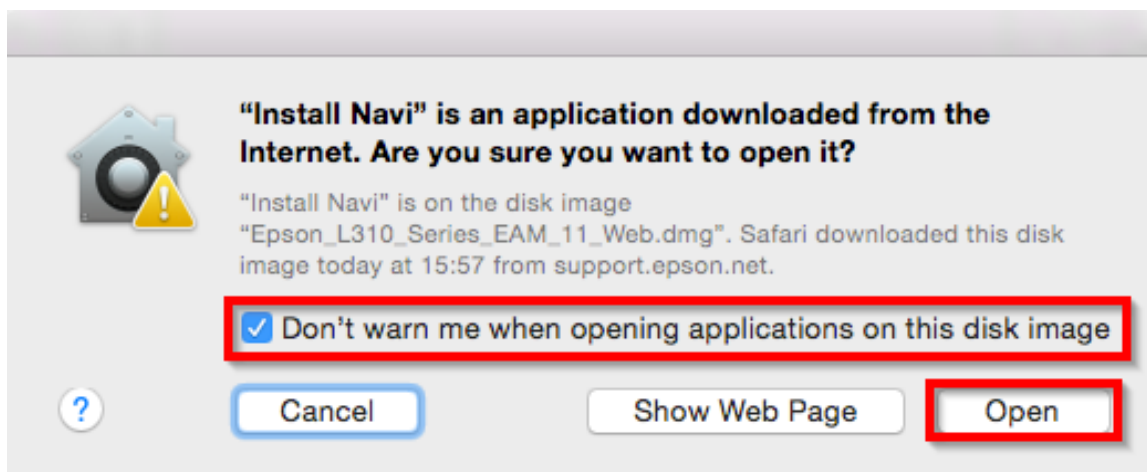

10. ใส่ Password (หากมี) จากนั้นคลิก **OK**

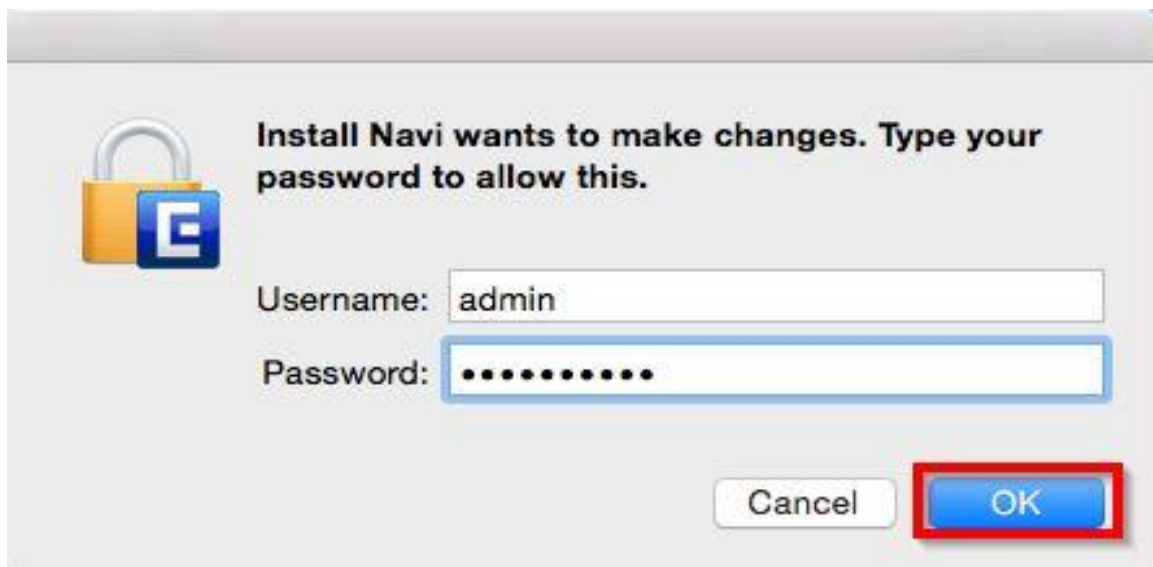

11. คลิก **I agree to the contents of the License Agreement** จากนั้นคลิก **Next**

Read the following License Agreement carefully.

SEIKO EPSON CORPORATION SOFTWARE LICENSE AGREEMENT

IMPORTANT! READ THIS SOFTWARE LICENSE AGREEMENT CAREFULLY. The computer software product, fontware, typefaces and/or data, including any accompanying explanatory written materials (the "Software") should only be installed or used by the Licensee ("you") on the condition you agree with SEIKO EPSON CORPORATION ("EPSON") to the terms and conditions set forth in this Agreement. By installing or using the Software, you are representing to agree all the terms and conditions set forth in this Agreement. You should read this Agreement carefully before installing or using the Software. If you do not agree with the terms and conditions of this Agreement, you are not permitted to install or use the Software.

1. License. EPSON and its suppliers grant you a personal, nonexclusive, royalty-free, non-sublicensable limited license to install and use the Software on any single computer or computers that you intend to use directly or via network. You may allow other users of the computers connected to the network to use the Software, provided that you (a) ensure that all such users agree and are bound by the terms and conditions of this Agreement, (b) ensure that all such users use the Software only in conjunction with the computers and in relation to the network of which they form part, and (c) indemnify and keep whole EPSON and its suppliers against all damages, losses, costs, expenses and liabilities which EPSON or its suppliers may incur as a consequence of such users failing to observe and perform the terms and conditions of this Agreement. You may also make copies of the Software as necessary for backup and archival purposes, provided that the copyright notice is reproduced in its entirety on the backup copy. The term "Software" shall include the software

I agree to the contents of the License Agreement.

Cancel


Next

12. คลิก Next

Start Here

Have you finished filling ink into the ink tanks? For details on filling ink and install the ink tank unit correctly, see the printer manual.

After filling ink into the ink tanks and install the ink tank unit, click [Next].




Cancel


Back

Next


13. คลิก Install

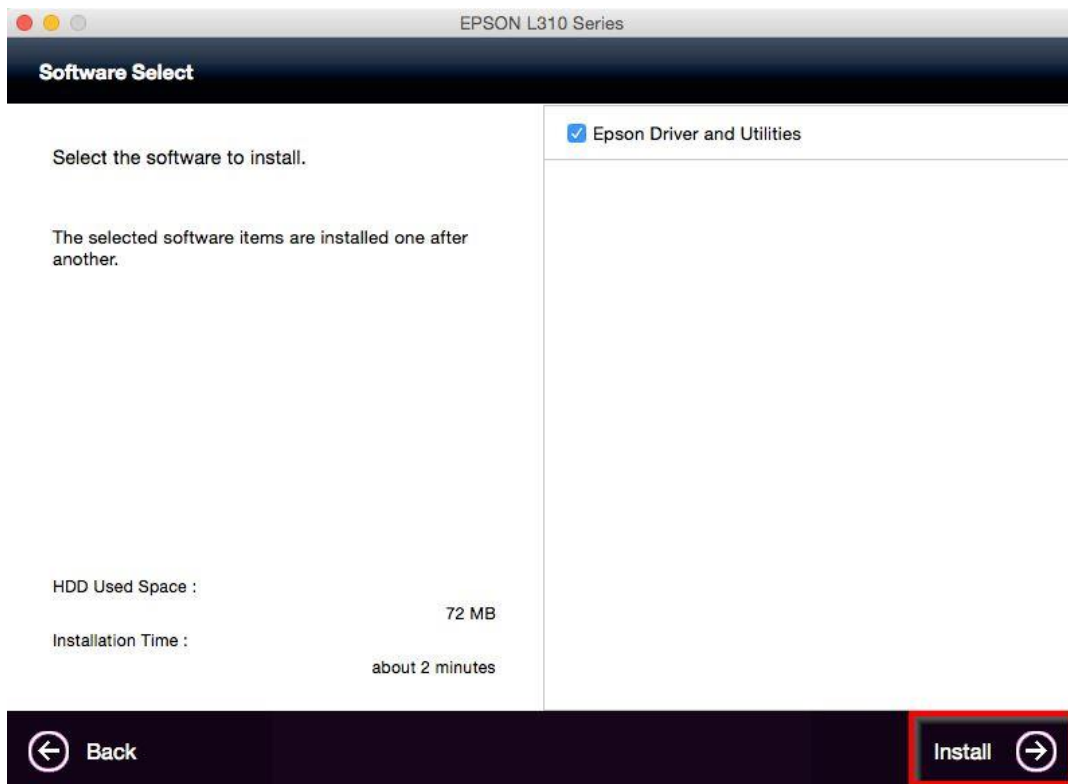


14. จะปรากฏหน้าต่างกำลังติดตั้ง

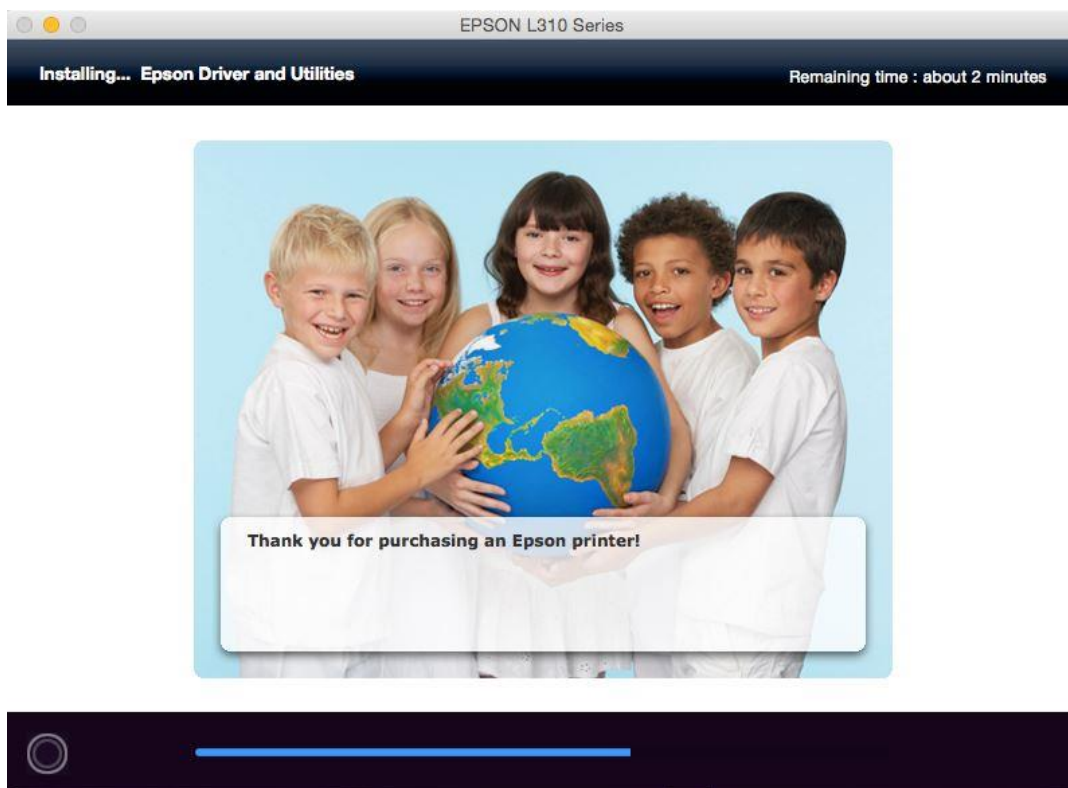

15. คลิก **Ink Charging is complete** หลังจากนั้นคลิก **Next**

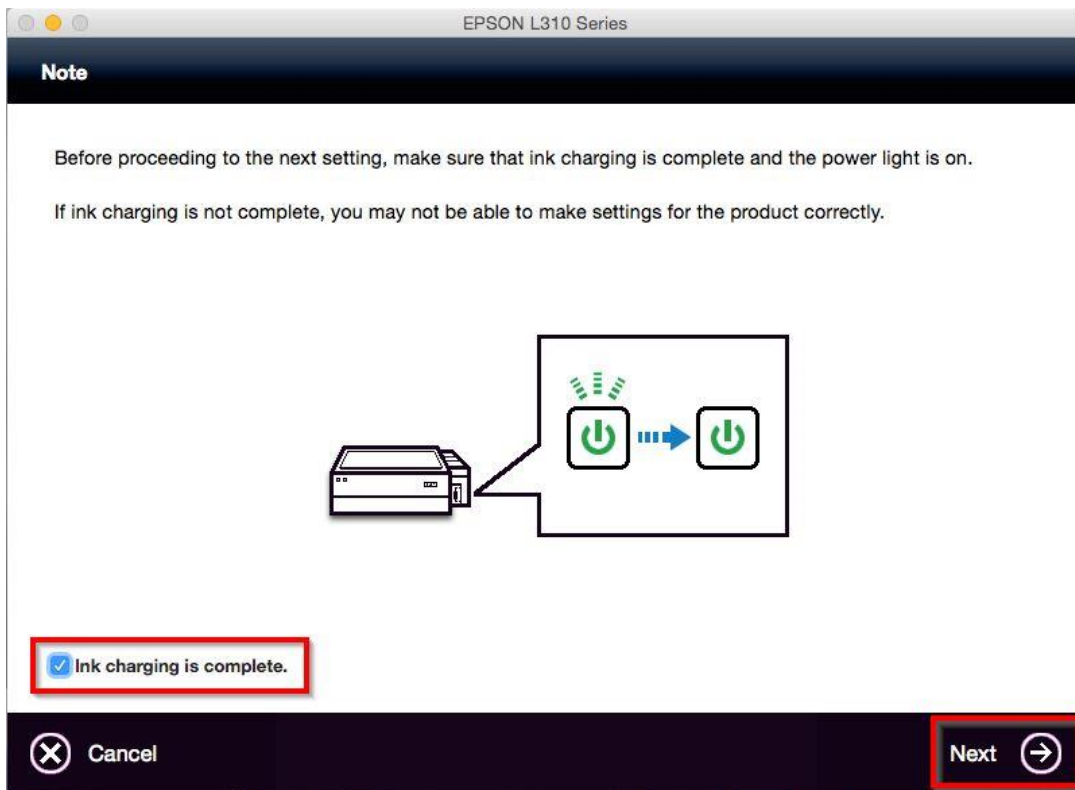


16. คลิก **Next**

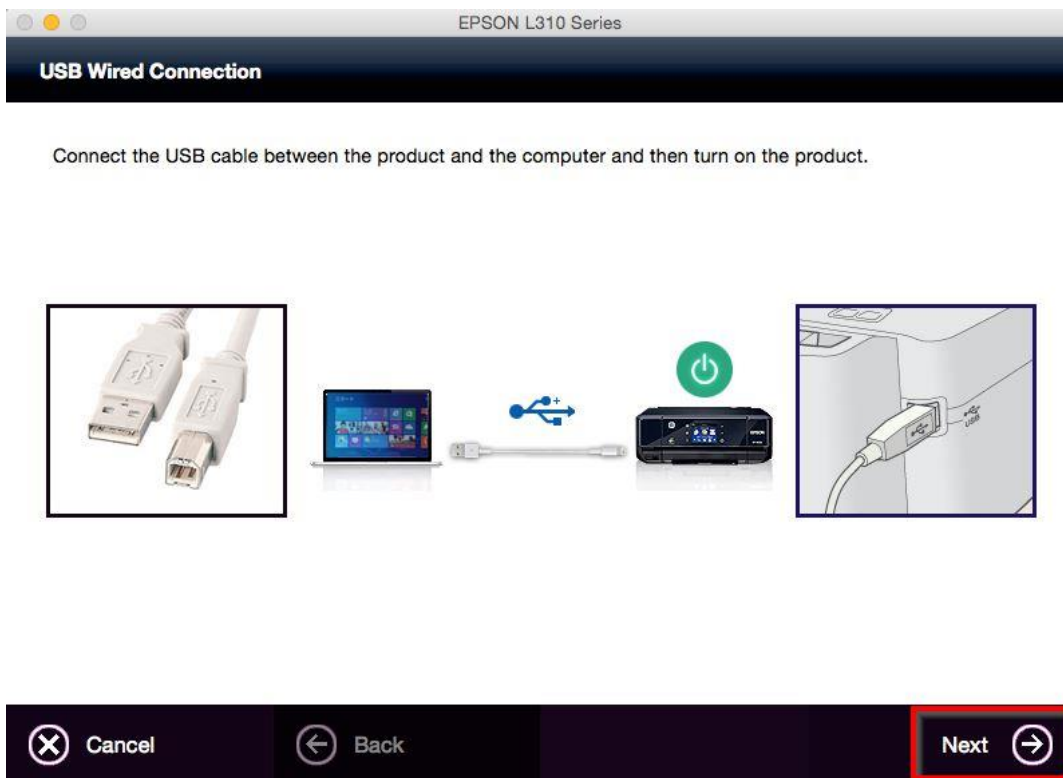


17. คลิก **Next**


Instructions for connection setup

If your printer is already displayed in "Printers & Scanners", select your printer, and click the [-] button to delete. Add the printer driver and the fax driver (for models with a fax function) according to the instructions below.

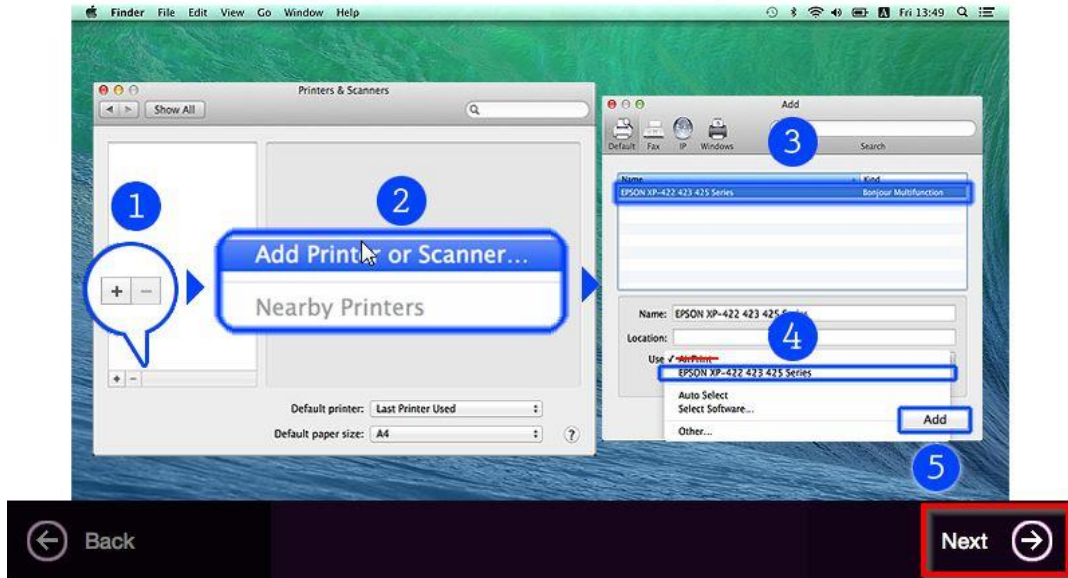


18. คลิกเครื่องหมาย +

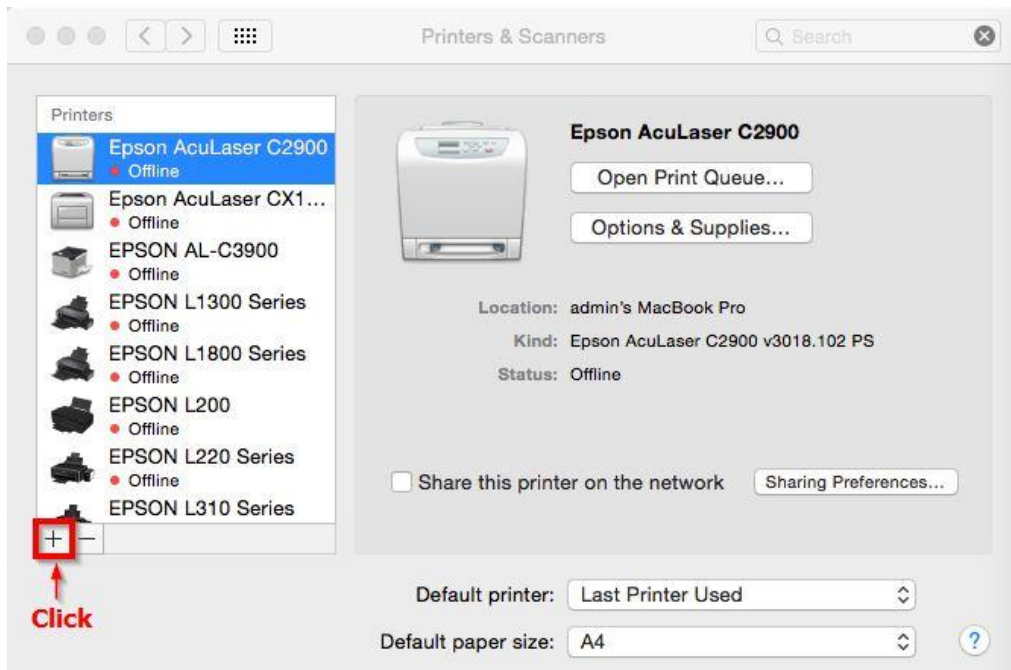
19. จะปรากฏหน้าต่างดังรูป คลิกเลือกรุ่น **Epson L310 Series** เสร็จแล้วคลิกที่ **Add**

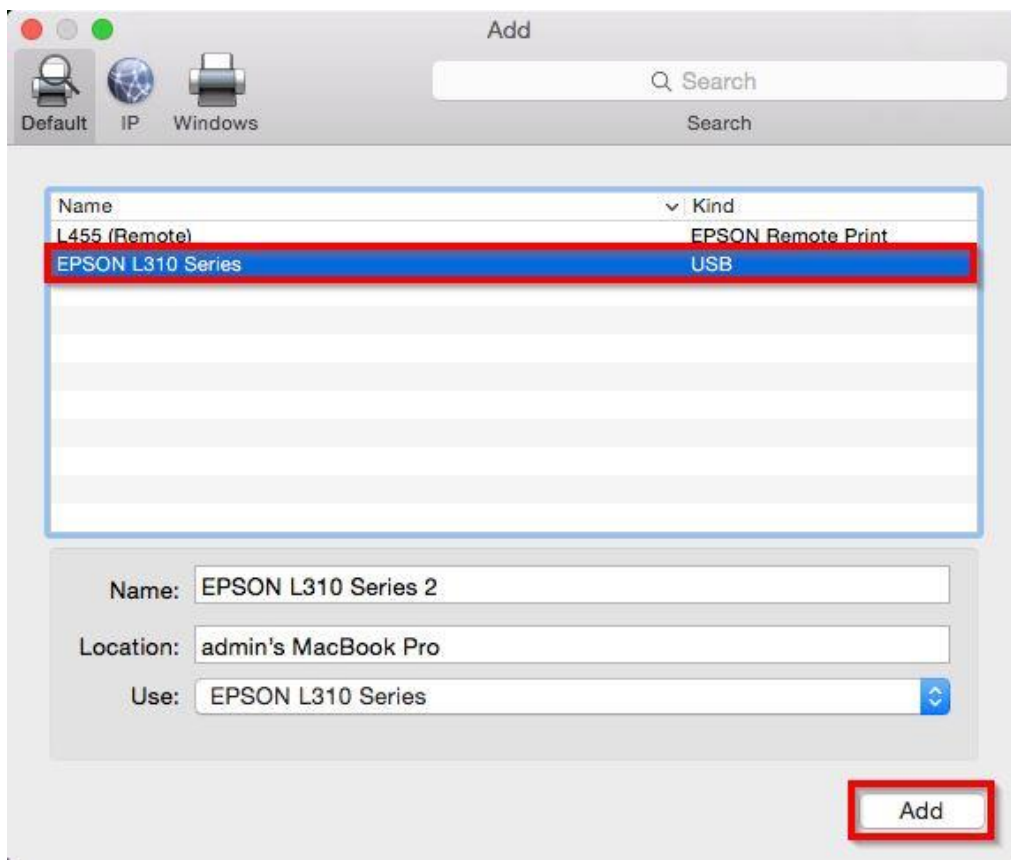


20. คลิก **Continue**

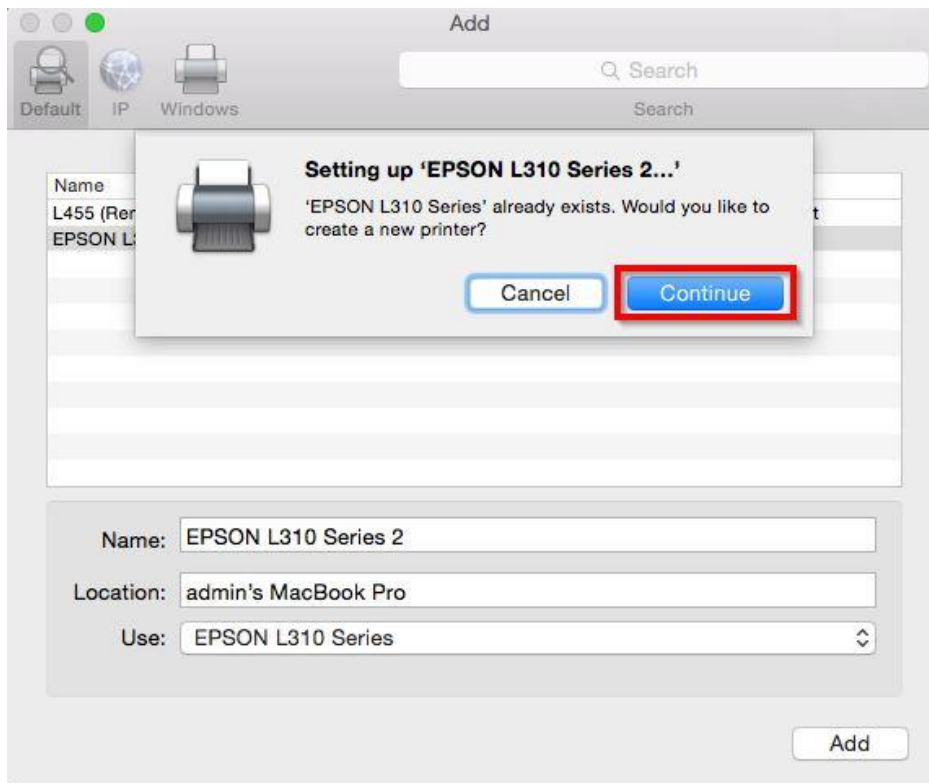

21. จะปรากฏ **Epson L310 Series** ในรายชื่อ Printers

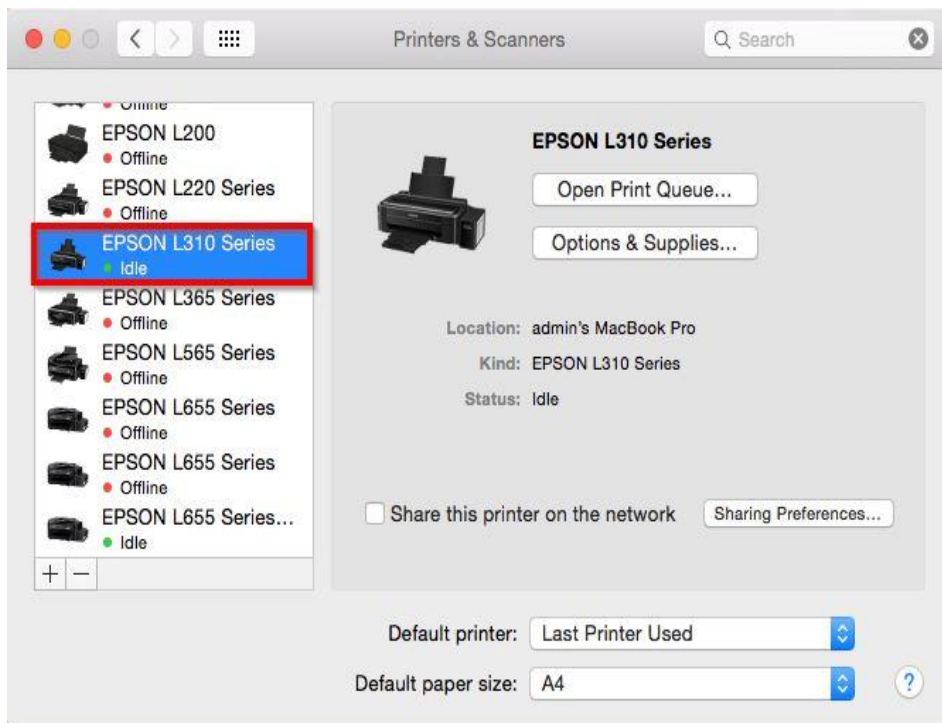

22. คลิก **Next**

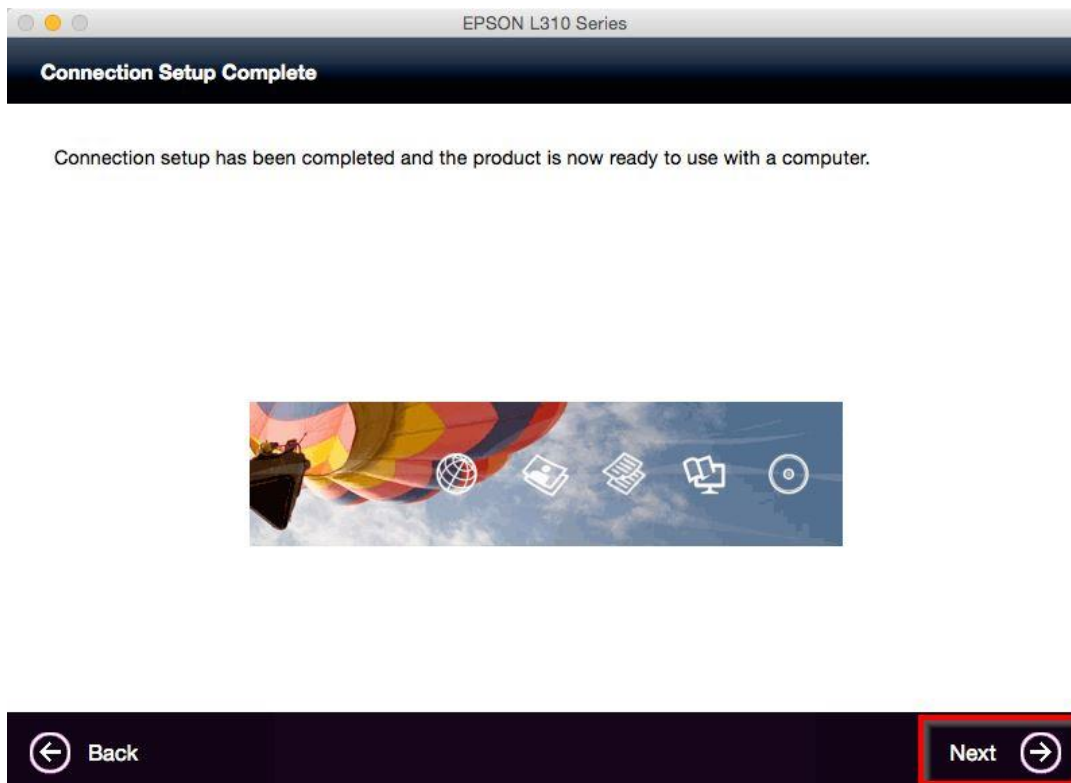

23. คลิก **Yes**



Check for software updates automatically and notify you the latest information.

Do you want to enable this feature?



24. คลิก **Finish**



Click [Finish] to start EPSON Software Updater, and then install software you want.

